丹东江城电机厂

Dandong Jiangcheng Motor Factory

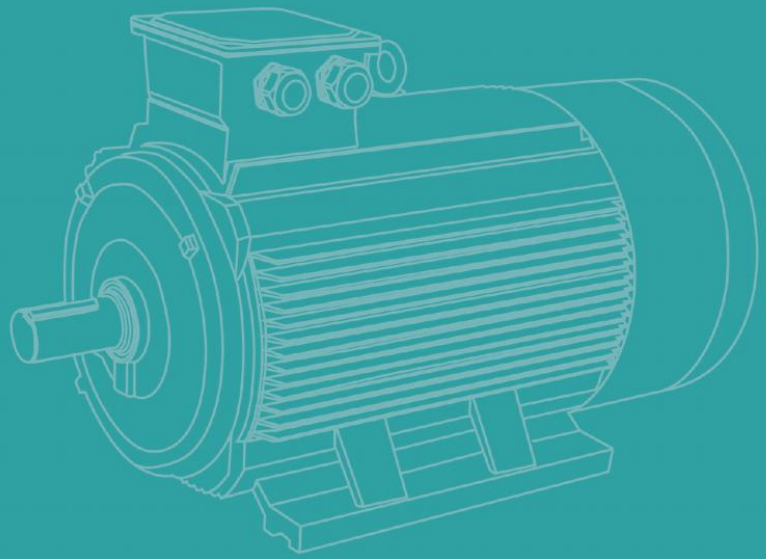

丹东江城电机厂
地址：辽宁省丹东市东港市前阳镇柳林车站东行300米（201国道北侧），近丹东西站与浪头机场
电话：0415-7155557
手机：13664168266
15174175588（微信同步）
传真：0415-7162967
邮编：118301
邮箱：13664168266@163.com

DANDONG JIANGCHENG MOTOR FACTORY
ADD：QIANYANG ZONE,DONGGANG COUNTY,DANDONG CITY,LIAONING PROVINCE,CHINA
TEL：0415-7155557
MB：13664168266
15174175588（WeChat）
FAX：0415-7162967
ZIP：118301
EMAIL：13664168266@163.COM

忠于企业 | 快速响应 | 积极行动 | 力求完美 | 以厂为家 | 共创繁荣

YE5 系列三相异步电动机

SERIES Super-Premium 3-Phase Asynchronous Motor

产品概述 *Product Introduction*

YE5系列三相异步电动机符合GB18613-2020《电动机能效限定值及能效等级》中规定的一级效率标准。同时，符合IEC 60034-30-1:2014标准的IE5能效等级。

其提高效率设计，符合国家对生产制造行业提出节能降耗的要求。

YE5系列电机的安装尺寸符合IEC 60034标准。具有结构合理，外形美观，效率高，噪音低，防护等级、绝缘等级高、长寿、长可靠等优点，可广泛应用于风机、水泵、机床、压缩机和运输机械等驱动各种通用机械设备，具有超大的过载倍数，更可在石油、化工、钢铁、矿山等其它环境比较恶劣的场所使用。

YE5 series three-phase asynchronous motor is in line with the first efficiency standard in the provisions of GB18613-2020 "Minimum allowable values of energy efficiency and values of efficiency grades for motors". Meanwhile, IE5 efficiency standard is also be satisfied in the provisions of IEC 60034-30-1:2014.

Improvement on design of efficiency is in line with the state's requirements on the energy saving and consumption reducing of the manufacturing sector.

YE5 series motors with the mounting dimension in accordance with standard IEC 60034, it has good features like, optimum structure, attractive appearance, low noise, high efficiency, high protection class as well as high insulation class, long service life,reliability. YE5 series motors can be widely used in various kinds of general use machineries like fans, pumps, machine tools, compressors, transportation and so on,it has a large overload multiple, and can be used in the hazardous areas with oil and chemical, steel plants, mining industry.

详细说明 *Specification*

◆现场条件

YE5 系列电动机可适用于大多数的场合及环境。电动机标准工作条件为 -20℃到 +40℃, 海拔 1000 米。

◆温升和绝缘

电动机按 F 级绝缘设计（155℃），按 B 级绝缘考核（80K），电动机的使用寿命和可靠性得到保证。

◆冷却和通风

标准冷却方式为全封闭自扇冷（TEFC)。标准电机装有辅流式塑料风扇。符合 IEC 60034-6 中 IC411 的规定。

◆防护等级

电动机的防护等级为 IP55, 可用于含尘或潮湿环境。也可根据客户要求提供更高防护等级的电动机。

◆电机保护

可根据要求安装 PTC、PT100 等绕组和轴承测温及保护装置。

◆电压、频率

标准电机为 380V/50HZ。可设计 200-660V 范围内任意电压的 50Hz 的电动机。在供电电压偏离额定电压 ±5% 的情况下，仍能良好运行。

◆振动

YE5 系列电动机在空载时振动速度等级符合 A 级。特殊要求时，可提供 B 级电动机。

◆质量保证

从产品设计到产品出厂，遵循 ISO9001 质量认证体系，严格遵守质量程序。

Site conditions

YE5 series motors are suitable for almost all applications and operate satisfactorily at temperature from -20°C to +40°Cand altitudes up to 1000 meters above sea level.

Temperature and insulation

F class (155°C) insulation system and temperature rise class B (80K) are adopted to the motor, which increase the motor useful life and reliability.

Cooling and ventilation

The standard cooling method is totally Enclosed Fan Cooled (TEFC) in accordance with IC411 of IEC 60034-6. Standard motors are equipped with centrifuge plastic fans.

Protection class

The standard protection degree of motor is IP55, which make moist and dusty condition is also allowable. Higher degree of protection is also available according to customer's requirement.

Motor protection

The protection and measurement equipment to Winding and bearing such as PTC, PT100 are available on request.

Voltage and frequency

Standard voltage and frequency is 380V/ 50HZ, special value on voltage and frequency is available on request. The motors will operate satisfactorily with variations of ±5% from the rated voltage.

Vibration

Standard vibration class is A during no- load condition; higher vibration class B is available on request.

Quality assurance

Stringent quality procedures are observed from first design to finished products in accordance with ISO9001 documented quality systems.

技术数据 *Technical Data*

2极-同步转速3000r/min 50Hz

2pole-3000rpm synchronous speed 50Hz

型号 motor type	额定功率 rated output kW	额定转速 rated speed rpm	额定电流 IFL 380V A	额定电流 IFL 400V A	额定电流 IFL 415V A	额定电流 IFL 525V A	效率 EFF %	功率因数 power factor cosφ	额定转矩 rated torque N.m	堵转转矩 额定转矩 TST/TFL	最大转矩 额定转矩 TM/TFL	堵转电流 额定电流 IST/IFL	转动惯量 M of I kgm²	噪音 noise level LW dB(A)	重量 net weight kg
YE5-80M1-2	0.75	2900	1.6	1.5	1.5	1.2	86.3%	0.82	2.5	2.2	2.5	8.2	0.0015	62	19
YE5-80M2-2	1.1	2905	2.3	2.2	2.1	1.7	87.8%	0.82	3.6	2.2	2.5	8.2	0.003	62	40
YE5-90S-2	1.5	2940	3.0	2.9	2.8	2.2	88.9%	0.85	4.9	2.2	2.5	8.2	0.0033	67	42
YE5-90L-2	2.2	2940	4.4	4.1	4.0	3.2	90.2%	0.85	7.1	2.2	2.5	8.2	0.0041	67	49
YE5-100L-2	3	2945	5.8	5.5	5.3	4.2	91.1%	0.87	9.7	2.2	2.5	8.2	0.01	74	74
YE5-112M-2	4	2945	7.5	7.1	6.9	5.4	91.8%	0.88	13.0	2.2	2.5	8.1	0.013	77	78
YE5-132S1-2	5.5	2945	10.3	9.7	9.4	7.4	92.6%	0.88	17.8	2.2	2.5	8.2	0.03	79	131
YE5-132S2-2	7.5	2945	13.7	13.0	12.6	9.9	93.3%	0.89	24.3	2.2	2.5	8.2	0.037	79	137
YE5-160M1-2	11	2965	20.0	19.0	18.3	14.5	94.0%	0.89	35.4	2.2	2.5	8.2	0.078	81	147
YE5-160M2-2	15	2965	27.1	25.7	24.8	19.6	94.5%	0.89	48.3	2.2	2.5	8.5	0.095	81	170
YE5-160L-2	18.5	2965	33.3	31.6	30.5	24.1	94.9%	0.89	59.6	2.2	2.5	8.5	0.11	81	240
YE5-180M-2	22	2970	39.5	37.5	36.2	28.6	95.1%	0.89	70.7	2.2	2.5	8.5	0.19	83	249
YE5-200L1-2	30	2975	53.6	50.9	49.1	38.8	95.5%	0.89	96.3	2.2	2.8	8.5	0.29	84	405
YE5-200L2-2	37	2975	65.9	62.6	60.4	47.7	95.8%	0.89	118.8	2.2	2.8	8.5	0.36	84	410
YE5-225M-2	45	2975	80.0	76.0	73.3	57.9	96.0%	0.89	144.5	2.2	2.8	8.5	0.46	86	437
YE5-250M-2	55	2980	97.6	92.7	89.4	70.6	96.2%	0.89	176.3	2.2	2.8	8.5	1.1	89	631
YE5-280S-2	75	2980	132.7	126.0	121.5	96.0	96.5%	0.89	240.4	2.2	2.8	8.5	1.9	91	1070
YE5-280M-2	90	2980	159.1	151.1	145.6	115.1	96.6%	0.89	288.4	2.2	2.8	8.5	2.29	91	1129
YE5-315S-2	110	2985	191.8	182.2	175.7	138.9	96.8%	0.9	351.9	2.2	2.8	8.5	3.05	92	1615
YE5-315M-2	132	2985	230.0	218.5	210.6	166.5	96.9%	0.9	422.3	2.2	2.8	8.5	3.41	92	1630
YE5-315L1-2	160	2985	278.5	264.5	255.0	201.6	97.0%	0.9	511.9	2.2	2.8	8.5	4.12	92	1848
YE5-315L-2	185	2985	317.8	301.9	291.0	230.0	97.2%	0.91	591.9	2.2	2.8	8.5	4.53	92	1900
YE5-315L2-2	200	2985	343.6	326.4	314.6	248.7	97.2%	0.91	639.9	2.2	2.8	8.5	4.87	92	1920
YE5-355M1-2	220	2990	377.9	359.0	346.0	273.5	97.2%	0.91	702.7	2.0	2.8	8.5	4.4	100	1650
YE5-355M2-2	250	2990	429.4	408.0	393.2	310.8	97.2%	0.91	798.5	2.0	2.8	8.5	4.8	100	1720
YE5-355L-2	280	2990	481.0	456.9	440.4	348.1	97.2%	0.91	894.3	2.0	2.8	8.5	5	100	1950
YE5-3551-2	315	2990	541.1	514.0	495.5	391.6	97.2%	0.91	1006.1	2.0	2.8	8.5	5.6	104	2150
YE5-3552-2	355	2990	609.8	579.3	558.4	441.4	97.2%	0.91	1133.9	2.0	2.8	8.5	5.9	104	2260
YE5-3553-2	400	2990	687.1	652.7	629.2	497.3	97.2%	0.91	1277.6	2.0	2.8	8.5	6.2	104	2340

技术数据 *Technical Data*

4极-同步转速1500r/min 50Hz

4pole-1500rpm synchronous speed 50Hz

型号 motor type	额定功率 rated output kW	额定转速 rated speed rpm	额定电流 IFL 380V A	额定电流 IFL 400V A	额定电流 IFL 415V A	额定电流 IFL 525V A	效率 EFF %	功率因数 power factor cosφ	额定转矩 rated torque N.m	堵转转矩 额定转矩 TST/TFL	最大转矩 额定转矩 TM/TFL	堵转电流 额定电流 IST/IFL	转动惯量 M of I kgm²	噪音 noise level LW dB(A)	重量 net weight kg
YE5-80M2-4	0.75	1450	1.7	1.6	1.6	1.2	88.2%	0.75	4.9	2.3	2.5	8.5	0.0055	56	37
YE5-90S-4	1.1	1470	2.5	2.4	2.3	1.8	89.5%	0.75	7.1	2.3	2.5	8.5	0.0049	59	45
YE5-90L-4	1.5	1470	3.3	3.1	3.0	2.4	90.4%	0.77	9.7	2.3	2.5	8.5	0.0056	59	52
YE5-100L1-4	2.2	1470	4.7	4.5	4.3	3.4	91.4%	0.78	14.3	2.3	2.5	8.5	0.019	64	69
YE5-100L2-4	3	1485	6.3	6.0	5.8	4.6	92.1%	0.78	19.3	2.3	2.5	9	0.029	64	79
YE5-112M-4	4	1485	8.2	7.8	7.5	5.9	92.8%	0.8	25.7	2.3	2.5	9	0.039	65	102
YE5-132S-4	5.5	1485	11.2	10.6	10.2	8.1	93.4%	0.8	35.4	2.1	2.5	9	0.092	71	148
YE5-132M-4	7.5	1490	15.0	14.2	13.7	10.8	94.0%	0.81	48.1	2.1	2.5	9	0.099	71	160
YE5-160M-4	11	1490	21.5	20.5	19.7	15.6	94.6%	0.82	70.5	2.1	2.5	9	0.19	73	227
YE5-160L-4	15	1490	28.5	27.1	26.1	20.7	95.1%	0.84	96.1	2.1	2.5	9	0.21	73	253
YE5-180M-4	18.5	1485	35.1	33.4	32.2	25.4	95.3%	0.84	119.0	2.1	2.8	9	0.29	76	274
YE5-180L-4	22	1485	41.7	39.6	38.2	30.2	95.5%	0.84	141.5	2.1	2.8	9	0.34	76	284
YE5-200L-4	30	1485	55.9	53.1	51.2	40.5	95.9%	0.85	192.9	2.1	2.8	9	0.73	76	447
YE5-225S-4	37	1485	68.8	65.4	63.0	49.8	96.1%	0.85	237.9	2.1	2.8	9	0.87	78	503
YE5-225M-4	45	1485	83.5	79.4	76.5	60.5	96.3%	0.85	289.4	2.1	2.8	9	0.96	78	535
YE5-250M-4	55	1490	101.9	96.8	93.3	73.7	96.5%	0.85	352.5	2.1	2.8	9	1.69	79	600
YE5-280S-4	75	1490	135.5	128.7	124.0	98.0	96.7%	0.87	480.7	2.1	2.8	9	4.1	80	1000
YE5-280M-4	90	1490	160.4	152.3	146.8	116.1	96.9%	0.88	576.8	2.1	2.8	9	5.37	80	1190
YE5-315S-4	110	1490	193.6	183.9	177.3	140.1	97.0%	0.89	705.0	2.1	2.8	9	5.9	88	1388
YE5-315M-4	132	1490	232.1	220.5	212.5	168.0	97.1%	0.89	846.0	2.1	2.8	9	6.49	88	1490
YE5-315L1-4	160	1490	277.9	264.0	254.5	201.1	97.2%	0.9	1025.5	1.9	2.8	8.5	7.89	88	1456
YE5-315L-4	185	1490	321.0	304.9	293.9	232.3	97.3%	0.9	1185.7	1.9	2.8	8.5	8.32	88	1566
YE5-315L2-4	200	1490	346.7	329.3	317.4	250.9	97.4%	0.9	1281.9	1.9	2.8	8.5	9.15	88	1569
YE5-355M1-4	220	1490	381.3	362.3	349.2	276.0	97.4%	0.9	1410.1	2.0	2.6	8.5	9.9	92	1960
YE5-355M2-4	250	1490	433.3	411.7	396.8	313.6	97.4%	0.9	1602.3	2.0	2.6	8.5	10.2	92	2080
YE5-355L1-4	280	1490	485.3	461.1	444.4	351.3	97.4%	0.9	1794.6	2.0	2.6	8.5	11.6	92	2190
YE5-3551-4	315	1490	546.0	518.7	499.9	395.2	97.4%	0.9	2019.0	2.0	2.6	8.5	12.8	92	2350
YE5-3552-4	355	1490	622.2	591.1	569.7	450.4	97.4%	0.9	2275.3	2.0	2.6	8.5	13.4	92	2520
YE5-3553-4	400	1490	709.1	673.6	649.3	513.2	97.4%	0.9	2563.8	2.0	2.6	8.5	14.2	92	2680

技术数据 *Technical Data*

6极-同步转速1000r/min 50Hz

6pole-1000rpm synchronous speed 50Hz

型号 motor type	额定功率 rated output kW	额定转速 rated speed rpm	额定电流 IFL 380V A	额定电流 IFL 400V A	额定电流 IFL 415V A	额定电流 IFL 525V A	效率 EFF %	功率因数 power factor cosφ	额定转矩 rated torque N.m	堵转转矩 额定转矩 TST/TFL	最大转矩 额定转矩 TM/TFL	堵转电流 额定电流 IST/IFL	转动惯量 M of I kgm²	噪音 noise level LW dB(A)	重量 net weight kg
YE5-90S-6	0.75	980	1.9	1.8	1.7	1.4	85.7%	0.7	7.3	2.1	2.6	8.5	0.0086	57	46
YE5-90L-6	1.1	980	2.7	2.6	2.5	2.0	87.2%	0.71	10.7	2.1	2.6	8.5	0.0098	57	58
YE5-100L-6	1.5	980	3.6	3.4	3.3	2.6	88.4%	0.71	14.6	2.1	2.6	8.5	0.026	61	74
YE5-112M-6	2.2	980	5.2	5.0	4.8	3.8	89.7%	0.71	21.4	2.1	2.6	8.5	0.038	65	90
YE5-132S-6	3	985	7.1	6.7	6.5	5.1	90.6%	0.71	29.1	2.1	2.6	8.5	0.077	69	124
YE5-132M1-6	4	985	9.2	8.8	8.5	6.7	91.4%	0.72	38.8	2.1	2.6	8.5	0.09	69	146
YE5-132M2-6	5.5	985	12.6	12.0	11.5	9.1	92.2%	0.72	53.3	2.1	2.6	8.5	0.11	69	153
YE5-160M-6	7.5	985	16.4	15.5	15.0	11.8	92.9%	0.75	72.7	2.1	2.6	8.5	0.23	73	169
YE5-160L-6	11	985	23.5	22.3	21.5	17.0	93.7%	0.76	106.6	2.1	2.6	8.5	0.26	73	257
YE5-180L-6	15	990	31.4	29.8	28.7	22.7	94.3%	0.77	144.7	2.1	2.6	8.5	0.52	73	235
YE5-200L1-6	18.5	990	37.1	35.3	34.0	26.9	94.6%	0.8	178.5	2.1	2.6	8.5	0.64	73	375
YE5-200L2-6	22	990	44.0	41.8	40.3	31.9	94.9%	0.8	212.2	2.1	2.6	8.5	0.74	73	418
YE5-225M-6	30	990	59.0	56.1	54.1	42.7	95.3%	0.81	289.4	2.1	2.6	8.5	1.37	74	515
YE5-250M-6	37	990	70.8	67.3	64.9	51.3	95.6%	0.83	356.9	2.1	2.6	8.5	2.51	76	598
YE5-280S-6	45	990	84.0	79.8	76.9	60.8	95.8%	0.85	434.1	2.1	2.6	8.5	4.09	78	850
YE5-280M-6	55	990	102.4	97.3	93.8	74.1	96.0%	0.85	530.6	2.1	2.6	8.5	4.65	78	900
YE5-315S-6	75	995	140.9	133.8	129.0	102.0	96.3%	0.84	719.8	2.1	2.6	8.5	9.06	83	1235
YE5-315M-6	90	995	168.7	160.3	154.5	122.1	96.5%	0.84	863.8	2.1	2.6	8.5	10.54	83	1378
YE5-315L1-6	110	995	206.0	195.7	188.6	149.1	96.6%	0.84	1055.8	2.1	2.6	8.5	11.04	83	1430
YE5-315L2-6	132	995	246.7	234.3	225.9	178.5	96.8%	0.84	1266.9	2.1	2.6	8.5	12.05	83	1517
YE5-355M1-6	160	995	291.4	276.8	266.8	210.9	97.0%	0.86	1535.7	1.9	2.4	8.0	12.9	85	1760
YE5-355M-6	185	995	337.0	320.1	308.5	243.9	97.0%	0.86	1775.6	1.9	2.4	8.0	13.4	85	1810
YE5-355M2-6	200	995	364.3	346.1	333.6	263.7	97.0%	0.86	1919.6	1.9	2.4	8.0	13.9	85	1960
YE5-355L1-6	220	995	400.7	380.7	366.9	290.0	97.0%	0.86	2111.6	1.9	2.4	7.8	14.4	85	2150
YE5-3551-6	250	995	455.3	432.6	416.9	329.6	97.0%	0.86	2399.5	1.9	2.4	7.8	14.8	91	2340
YE5-3552-6	280	995	510.0	484.5	467.0	369.1	97.0%	0.86	2687.4	1.9	2.4	7.8	15.2	91	2460
YE5-3553-6	315	995	573.7	545.0	525.3	415.3	97.0%	0.86	3023.4	1.9	2.4	7.8	15.8	91	2580

技术数据 *Technical Data*

8极-同步转速750r/min 50Hz

8pole-750rpm synchronous speed 50Hz

型号 motor type	额定功率 rated output kW	额定转速 rated speed rpm	额定电流 IFL 380V A	额定电流 IFL 400V A	额定电流 IFL 415V A	额定电流 IFL 525V A	效率 EFF %	功率因数 power factor cosφ	额定转矩 rated torque N.m	堵转转矩 额定转矩 TST/TFL	最大转矩 额定转矩 TM/TFL	堵转电流 额定电流 IST/IFL	转动惯量 M of I kgm²	噪音 noise level LW dB(A)	重量 net weight kg
YE5-100L1-8	0.75	715	2.1	2.0	1.9	1.5	82.0%	0.67	10.0	2	2.5	7.2	0.015	59	50
YE5-100L2-8	1.1	720	3.0	2.8	2.7	2.1	84.0%	0.67	14.6	2	2.5	7.2	0.022	59	54
YE5-112M-8	1.5	720	3.9	3.7	3.5	2.8	85.5%	0.69	19.9	2	2.5	7.2	0.029	61	80
YE5-132S-8	2.2	730	5.6	5.3	5.1	4.0	87.2%	0.69	28.8	2	2.5	7.2	0.062	64	84
YE5-132M-8	3	730	7.3	6.9	6.6	5.3	88.4%	0.71	39.2	2	2.5	7.2	0.077	64	90
YE5-160M1-8	4	735	9.6	9.1	8.8	6.9	89.4%	0.71	52.0	2	2.5	7.2	0.13	68	148
YE5-160M2-8	5.5	735	12.8	12.2	11.8	9.3	90.4%	0.72	71.5	2	2.5	7.2	0.17	68	157
YE5-160L-8	7.5	735	17.3	16.5	15.9	12.5	91.3%	0.72	97.4	2	2.5	7.2	0.23	68	211
YE5-180L-8	11	740	24.8	23.6	22.7	18.0	92.2%	0.73	142.0	2	2.5	7.5	0.35	70	294
YE5-200L-8	15	740	33.6	31.9	30.8	24.3	92.9%	0.73	193.6	2	2.5	7.5	0.64	73	350
YE5-225S-8	18.5	740	40.2	38.2	36.8	29.1	93.3%	0.75	238.8	2	2.5	7.5	1.11	73	465
YE5-225M-8	22	740	47.0	44.6	43.0	34.0	93.6%	0.76	283.9	2	2.5	7.5	1.37	73	643
YE5-250M-8	30	745	62.9	59.8	57.6	45.5	94.1%	0.77	384.6	2	2.5	7.5	2.35	75	510
YE5-280S-8	37	745	76.3	72.5	69.9	55.3	94.4%	0.78	474.3	2	2.5	7.5	4.229	76	535
YE5-280M-8	45	745	91.4	86.8	83.7	66.1	94.7%	0.79	576.8	2	2.5	7.5	5.87	76	625
YE5-315S-8	55	745	111.5	105.9	102.1	80.7	94.9%	0.79	705.0	2	2.5	7.5	8.86	82	1188
YE5-315M-8	75	745	149.5	142.0	136.9	108.2	95.3%	0.8	961.4	2	2.5	7.5	10.54	82	1283
YE5-315L1-8	90	745	179.0	170.0	163.9	129.6	95.5%	0.8	1153.7	2	2.5	7.5	12.52	82	1330
YE5-315L2-8	110	745	218.3	207.4	199.9	158.0	95.7%	0.8	1410.1	2	2.5	7.5	15.12	82	1401
YE5-355M1-8	132	745	258.2	245.3	236.4	186.9	95.9%	0.81	1692	1.8	2.4	6.5	12.9	89	1850
YE5-355M2-8	160	745	315.6	300	286.0	226.0	96.1%	0.81	2051	1.8	2.4	6.5	13.9	89	1990
YE5-355L-8	185	745	363.8	345.6	330.3	261.1	96.2%	0.81	2371	1.8	2.4	6.5	14.2	89	2150
YE5-3551-8	200	745	393.2	373.6	356.7	282.0	96.3%	0.81	2564	1.8	2.4	6.5	14.9	89	2450
YE5-3552-8	220	745	432.6	411	392.4	310.2	96.3%	0.81	2820	1.8	2.4	6.5	15.3	89	2530
YE5-3553-8	250	745	491.6	467	445.9	352.5	96.3%	0.81	3205	1.8	2.4	6.5	16.0	89	2650

B3外形及安装尺寸 *Dimensions Foot Mount B3*

YE5-80~132

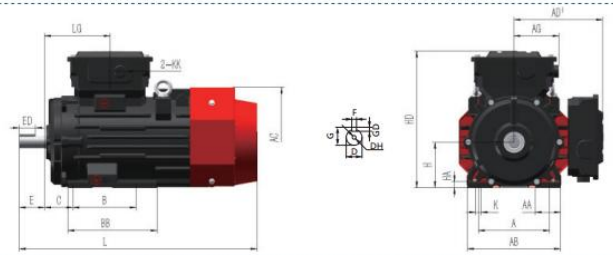

YE5-160~200

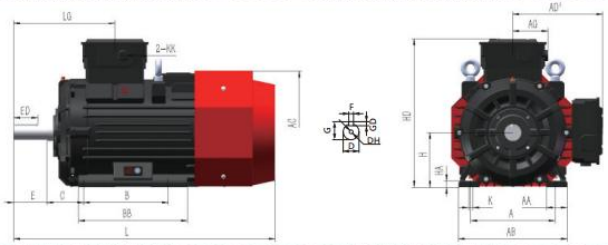

YE5-225~280

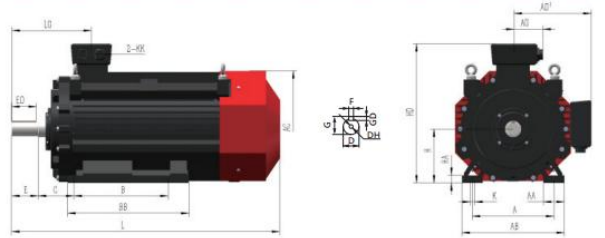

YE5-315~355

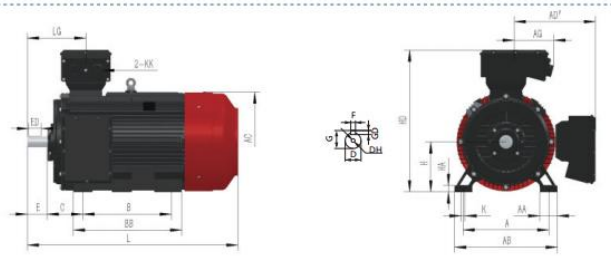

B3外形及安装尺寸 *Dimensions Foot Mount B3*

机座号	极数	A	AA	AB	AC*	AD'	AG	B	BB	C	D	DH*	E	ED	F	G	GD	H	HA	HD	K	KK	L*	LG
80M	2-8	125	45	160	196	/	115	100	160	50	19	M6X16	40	22	6	15.5	6	80	11	255	10	M25X1.5	420	123
90S	2-8	140	50	184	227	/	115	100	176	56	24	M8X19	50	32	8	20	7	90	12	275	10	M25X1.5	475	129
90L	2-8	140	50	184	227	/	115	125	176	56	24	M8X19	50	32	8	20	7	90	12	275	10	M25X1.5	475	129
100L	2-8	160	60	210	243	/	127	140	220	63	28	M10X22	60	40	8	24	7	100	13	305	12	M32X1.5	580	153
112M	2-8	190	65	230	269	/	127	140	240	70	28	M10X22	60	40	8	24	7	112	15	335	12	M32X1.5	595	160
132S	2-8	216	70	270	315	/	130	140	265	89	38	M12X28	80	56	10	33	8	132	19	395	12	M32X1.5	690	184
132M	2-8	216	70	270	315	/	130	178	265	89	38	M12X28	80	56	10	33	8	132	19	395	12	M32X1.5	690	184
160M1	2	254	67	320	340	255	95	210	305	108	42	M16X36	110	80	12	37	8	160	19	430	14.5	M36X2	656.5	270
160M2	2	254	67	320	340	255	95	210	375	108	42	M16X36	110	80	12	37	8	160	19	430	14.5	M36X2	728.5	270
160M	6	254	67	320	340	255	95	210	375	108	42	M16X36	110	80	12	37	8	160	19	430	14.5	M36X2	728.5	270
160M	4，8	254	70	320	355	290	110	210	360	108	42	M16X36	110	80	12	37	8	160	21	450	14.5	M36X2	862	313
160L	2-8	254	70	320	355	290	110	254	360	108	42	M16X36	110	80	12	37	8	160	21	450	14.5	M36X2	862	313
180M	2	279	70	345	385	300	120	241	420	121	48	M16x36	110	80	14	42.5	9	180	22	480	14.5	M36X2	818	288
180M	4	279	70	360	415	325	120	241	360	121	48	M16x36	110	80	14	42.5	9	180	22	505	14.5	M36x2	866	334
180L	4-8	279	70	360	415	325	120	279	360	121	48	M16x36	110	80	14	42.5	9	180	22	505	14.5	M36x2	866	334
200L	2-8	318	75	390	445	340	120	305	385	133	55	M20x42	110	80	16	49	10	200	23	540	18.5	M40x1.5	967	338
225S	4-8	356	75	435	490	370	160	286	475	149	60	M20x42	140	100	18	53	11	225	30	595	18.5	M64x2	1018	370
225M	2	356	75	435	490	370	160	311	475	149	55	M20x42	110	80	16	49	10	225	28	595	18.5	M64x2	928	320
225M	4-8	356	75	435	490	370	160	311	475	149	60	M20x42	140	100	18	53	11	225	30	595	18.5	M64x2	1078	370
250M	2	406	90	490	530	410	160	349	500	168	60	M20x42	140	100	18	53	11	250	31	660	24	M64x2	1105	390
250M	4-8	406	90	490	530	410	160	349	500	168	65	M20x42	140	100	18	58	11	250	31	660	24	M64x2	1105	390
280S	2	457	110	540	610	460	160	368	640	190	65	M20x42	140	100	18	58	11	280	36	740	24	M64x2	1275	405
280S	4-8	457	110	540	610	460	160	368	640	190	75	M20x42	140	100	20	67.5	12	280	36	740	24	M64x2	1290	405
280M	2	457	110	540	610	460	160	419	640	190	65	M20x42	140	100	18	58	11	280	36	740	24	M64x2	1275	405
280M	4-8	457	110	540	610	460	160	419	640	190	75	M20x42	140	100	20	67.5	12	280	36	740	24	M64x2	1390	405
315S	2	508	120	640	690	535	195	406	760	216	65	M20x42	140	100	18	58	11	315	35	850	28	M64x2	1435	450
315M	2	508	120	640	690	535	195	457	760	216	65	M20x42	140	100	18	58	11	315	35	850	28	M64x2	1535	450
315L	2	508	120	640	690	535	195	508	760	216	65	M20x42	140	100	18	58	11	315	35	850	28	M64x2	1535	450
315S	4-8	508	120	640	690	535	195	406	760	216	80	M20x42	170	130	22	71	14	315	35	850	28	M64x2	1520	480
315M	4-8	508	120	640	690	535	195	457	760	216	80	M20x42	170	130	22	71	14	315	35	850	28	M64x2	1520	480
315L	4-8	508	120	640	690	535	195	508	760	216	80	M20x42	170	130	22	71	14	315	35	850	28	M64x2	1620	480
355M	2	610	125	735	735	645	260	560	775	254	75	M24X50	140	110	20	67.5	12	355	49	1000	28	M72x2	1500	415
355L	2	610	125	735	735	645	260	630	775	254	75	M24X50	140	110	20	67.5	12	355	49	1000	28	M72x2	1500	415
355M	4-8	610	125	735	735	645	260	560	775	254	95	M24X50	170	140	25	86	14	355	49	1000	28	M72x2	1530	445
355L	4-8	610	125	735	735	645	260	630	775	254	95	M24X50	170	140	25	86	14	355	49	1000	28	M72x2	1530	445
355L加长	2	610	125	735	735	645	260	630	875	254	75	M24X50	140	110	20	67.5	12	355	49	1000	28	M72x2	1600	415
355L加长	4-8	610	125	735	735	645	260	630	875	254	95	M24X50	170	140	25	86	14	355	49	1000	28	M72x2	1630	445

注:1.图中DH默认为不带螺纹的中心孔，可根据需要加工成螺纹孔。
The 'DH' defaults to a non-threaded center hole and it can be machined into a threaded hole as required.

B35外形及安装尺寸 *Dimensions Foot-Flange Mount B35*

YE5-80~132

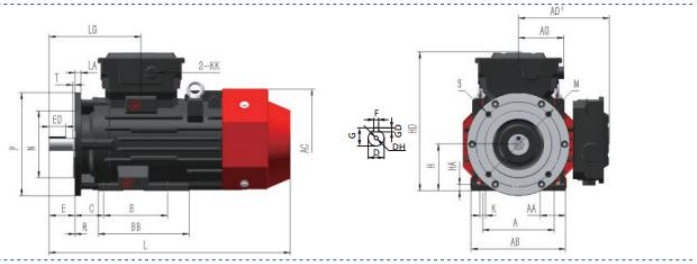

YE5-160~200

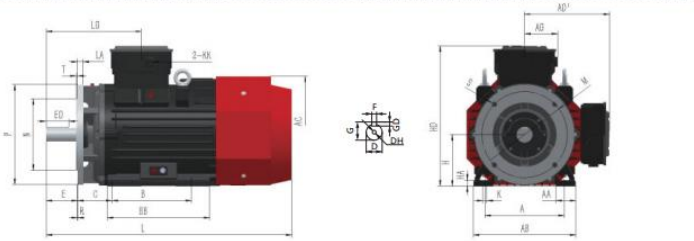

YE5-225~280

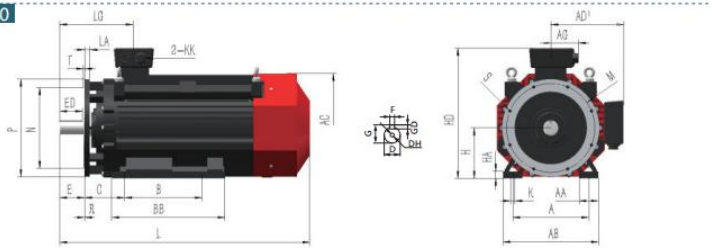

YE5-315~355

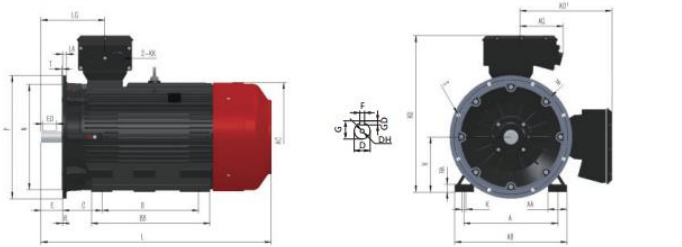

B35外形及安装尺寸 *Dimensions Foot-Flange Mount B35*

机座号	极数	A	AA	AB	AC*	AD'	AG	B	BB	C	D	DH*	E	ED	F	G	GD	H	HA	HD	K	L*	LA	LG	M	N	P	S	T	KK
80M	2-8	125	45	160	196	/	115	100	160	50	19	M6X16	40	22	6	15.5	6	80	11	255	10	420	12	123	165	130	200	12	3.5	M25X1.5
90S	2-8	140	50	184	227	/	115	100	176	56	24	M8X19	50	32	8	20	7	90	12	275	10	475	12	129	165	130	200	12	3.5	M25X1.5
90L	2-8	140	50	184	227	/	115	125	176	56	24	M8X19	50	32	8	20	7	90	12	275	10	475	12	129	165	130	200	12	3.5	M25X1.5
100L	2-8	160	60	210	243	/	127	140	220	63	28	M10X22	60	40	8	24	7	100	13	305	12	580	14	153	215	180	250	14.5	4	M32X1.5
112M	2-8	190	65	230	269	/	127	140	240	70	28	M10X22	60	40	8	24	7	112	15	335	12	595	14	160	215	180	250	14.5	4	M32X1.5
132S	2-8	216	70	270	315	/	130	140	265	89	38	M12X28	80	56	10	33	8	132	19	395	12	690	16	184	265	230	300	14.5	4	M32X1.5
132M	2-8	216	70	270	315	/	130	178	265	89	38	M12X28	80	56	10	33	8	132	19	395	12	690	16	184	265	230	300	14.5	4	M32X1.5
160M1	2	254	67	320	340	255	95	210	305	108	42	M16X36	110	80	12	37	8	160	19	430	14.5	656.5	15	270	300	250	350	18.5	5	M36X2
160M2	2	254	67	320	340	255	95	210	375	108	42	M16X36	110	80	12	37	8	160	19	430	14.5	728.5	15	270	300	250	350	18.5	5	M36X2
160M	6	254	67	320	340	255	95	210	375	108	42	M16X36	110	80	12	37	8	160	19	430	14.5	728.5	15	270	300	250	350	18.5	5	M36X2
160M	4.8	254	70	320	355	290	110	210	360	108	42	M16X36	110	80	12	37	8	160	21	450	14.5	862	19	313	300	250	350	18.5	5	M36X2
160L	2-8	254	70	320	355	290	110	254	360	108	42	M16X36	110	80	12	37	8	160	21	450	14.5	862	19	313	300	250	350	18.5	5	M36X2
180M	2	279	70	345	385	300	120	241	420	121	48	M16x36	110	80	14	42.5	9	180	22	480	14.5	818	15	288	300	250	350	18.5	5	M36X2
180M	4	279	70	360	415	325	120	241	360	121	48	M16x36	110	80	14	42.5	9	180	22	505	14.5	866	20	334	300	250	350	18.5	5	M36X2
180L	4-8	279	70	360	415	325	120	279	360	121	48	M16x36	110	80	14	42.5	9	180	22	505	14.5	866	20	334	300	250	350	18.5	5	M36X2
200L	2-8	318	75	390	445	340	120	305	385	133	55	M20x42	110	80	16	49	10	200	23	540	18.5	967	22	338	350	300	400	18.5	5	M40x1.5
225S	4-8	356	75	435	490	370	160	286	475	149	60	M20x42	140	100	18	53	11	225	30	595	18.5	1018	20	370	400	350	450	18.5	5	M64x2
225M	2	356	75	435	490	370	160	311	475	149	55	M20x42	110	80	16	49	10	225	28	595	18.5	928	19	320	400	350	450	18.5	5	M64x2
225M	4-8	356	75	435	490	370	160	311	475	149	60	M20x42	140	100	18	53	11	225	30	595	18.5	1078	20	370	400	350	450	18.5	5	M64x2
250M	2	406	90	490	530	410	160	349	500	168	60	M20x42	140	100	18	53	11	250	31	660	24	1105	20	390	500	450	550	18.5	5	M64x2
250M	4-8	406	90	490	530	410	160	349	500	168	65	M20x42	140	100	18	58	11	250	31	660	24	1105	20	390	500	450	550	18.5	5	M64x2
280S	2	457	110	540	610	460	160	368	640	190	65	M20x42	140	100	18	58	11	280	36	740	24	1275	22	405	500	450	550	18.5	5	M64x2
280S	4-8	457	110	540	610	460	160	368	640	190	75	M20x42	140	100	20	67.5	12	280	36	740	24	1290	22	405	500	450	550	18.5	5	M64x2
280M	2	457	110	540	610	460	160	419	640	190	65	M20x42	140	100	18	58	11	280	36	740	24	1275	22	405	500	450	550	18.5	5	M64x2
280M	4-8	457	110	540	610	460	160	419	640	190	75	M20x42	140	100	20	67.5	12	280	36	740	24	1390	22	405	500	450	550	18.5	5	M64x2
315S	2	508	120	640	690	535	195	406	760	216	65	M20x42	140	100	18	58	11	315	35	850	28	1435	23	450	600	550	660	24	6	M64x2
315M	2	508	120	640	690	535	195	457	760	216	65	M20x42	140	100	18	58	11	315	35	850	28	1535	23	450	600	550	660	24	6	M64x2
315L	2	508	120	640	690	535	195	508	760	216	65	M20x42	140	100	18	58	11	315	35	850	28	1535	23	450	600	550	660	24	6	M64x2
315S	4-8	508	120	640	690	535	195	406	760	216	80	M20x42	170	130	22	71	14	315	35	850	28	1520	23	480	600	550	660	24	6	M64x2
315M	4-8	508	120	640	690	535	195	457	760	216	80	M20x42	170	130	22	71	14	315	35	850	28	1520	23	480	600	550	660	24	6	M64x2
315L	4-8	508	120	640	690	535	195	508	760	216	80	M20x42	170	130	22	71	14	315	35	850	28	1620	23	480	600	550	660	24	6	M64x2
355M	2	610	125	735	735	645	260	560	775	254	75	M24X50	140	110	20	67.5	12	355	49	1000	28	1500	25	415	740	680	800	24	6	M72X2
355L	2	610	125	735	735	645	260	630	775	254	75	M24X50	140	110	20	67.5	12	355	49	1000	28	1500	25	415	740	680	800	24	6	M72X2
355M	4-8	610	125	735	735	645	260	560	775	254	95	M24X50	170	140	25	86	14	355	49	1000	28	1530	25	445	740	680	800	24	6	M72X2
355L	4-8	610	125	735	735	645	260	630	775	254	95	M24X50	170	140	25	86	14	355	49	1000	28	1530	25	445	740	680	800	24	6	M72X2
355L加长	2	610	125	735	735	645	260	630	875	254	75	M24X50	140	110	20	67.5	12	355	49	1000	28	1600	25	445	740	680	800	24	6	M72X2
355L加长	4-8	610	125	735	735	645	260	630	875	254	95	M24X50	170	140	25	86	14	355	49	1000	28	1630	25	445	740	680	800	24	6	M72X2

注:1.图中R尺寸值均为0。The 'R' dimensions is zero.
2.图中DH默认为不带螺纹的中心孔，可根据需要加工成螺纹孔。

B5&V1外形及安装尺寸 *Dimensions Flange Mount B5&V1*

YE5-80~132

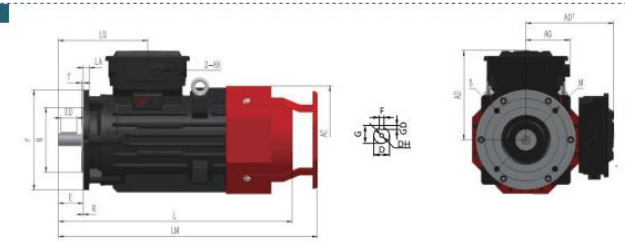

YE5-160~200

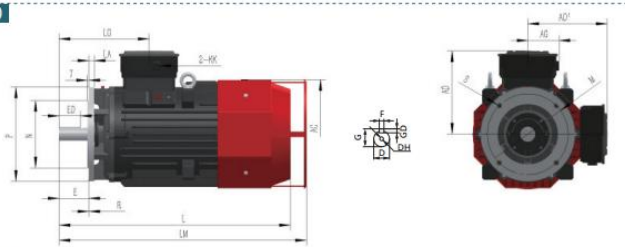

YE5-225~280

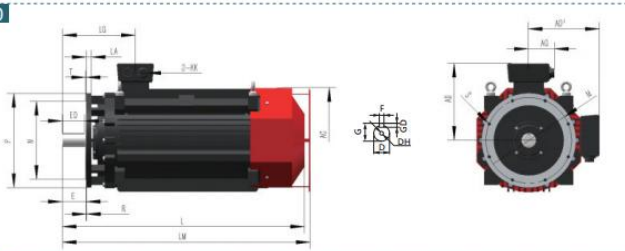

YE5-315~355

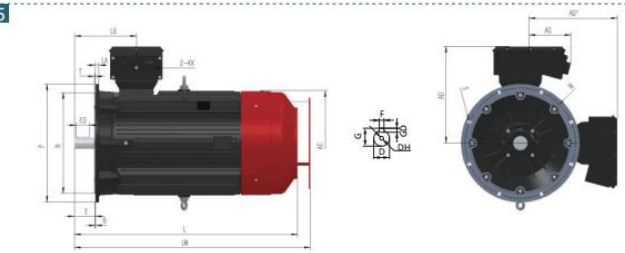

B5&V1外形及安装尺寸 *Dimensions Flange Mount B5&V1*

机座号	极数	AC*	D	AD	AD'	AG	DH*	E	ED	F	G	GD	LA	LG	M	N	P	S	T	KK	L*	LM*
80M	2-8	196	19	175	175	115	M6X16	40	22	6	15.5	6	12	123	165	130	200	12	3.5	M25X1.5	420	-
90S	2-8	227	24	185	185	115	M8X19	50	32	8	20	7	12	129	165	130	200	12	3.5	M25X1.5	475	-
90L	2-8	227	24	190	190	115	M8X19	50	32	8	20	7	12	129	165	130	200	12	3.5	M25X1.5	475	-
100L	2-8	243	28	195	195	127	M10X22	60	40	8	24	7	14	147	215	180	250	14.5	4	M32X1.5	580	-
112M	2-8	269	28	220	220	127	M10X22	60	40	8	24	7	14	144	215	180	250	14.5	4	M32X1.5	595	-
132S	2-8	315	38	235	235	130	M12X28	80	56	10	33	8	16	250	265	230	300	14.5	4	M32X1.5	690	-
132M	2-8	315	38	235	235	130	M12X28	80	56	10	33	8	16	250	265	230	300	14.5	4	M32X1.5	690	-
160M1	2	340	42	255	255	95	M16X36	110	80	12	37	8	15	270	300	250	350	18.5	5	M36X2	656.5	701.5
160M2	2	340	42	255	255	95	M16X36	110	80	12	37	8	15	270	300	250	350	18.5	5	M36X2	728.5	773.5
160M	6	340	42	255	255	95	M16X36	110	80	12	37	8	15	270	300	250	350	18.5	5	M36X2	728.5	773.5
160M	4、8	355	42	290	290	110	M16X36	110	80	12	37	8	19	313	300	250	350	18.5	5	M36X2	862	907
160L	2-8	355	42	290	290	110	M16X36	110	80	12	37	8	19	313	300	250	350	18.5	5	M36X2	862	907
180M	2	385	48	300	300	120	M16x36	110	80	14	42.5	9	15	288	300	250	350	18.5	5	M36X2	818	863
180M	4	415	48	325	325	120	M16x36	110	80	14	42.5	9	20	334	300	250	350	18.5	5	M36X2	866	911
180L	4-8	415	48	325	325	120	M16x36	110	80	14	42.5	9	20	334	300	250	350	18.5	5	M36X2	866	911
200L	2-8	445	55	340	340	120	M20x42	110	80	16	49	10	22	338	350	300	400	18.5	5	M40x1.5	967	1042
225S	4-8	490	60	370	370	160	M20x42	140	100	18	53	11	20	370	400	350	450	18.5	5	M64x2	1018	1093
225M	2	490	55	370	370	160	M20x42	110	80	16	49	10	19	320	400	350	450	18.5	5	M64x2	928	1003
225M	4-8	490	60	370	370	160	M20x42	140	100	18	53	11	20	370	400	350	450	18.5	5	M64x2	1078	1153
250M	2	530	60	410	410	160	M20x42	140	100	18	53	11	22	390	500	450	550	18.5	5	M64x2	1105	1205
250M	4-8	530	65	410	410	160	M20x42	140	100	18	58	11	22	390	500	450	550	18.5	5	M64x2	1105	1205
280S	2	610	65	460	460	160	M20x42	140	100	18	58	11	22	405	500	450	550	18.5	5	M64x2	1275	1375
280S	4-8	610	75	460	460	160	M20x42	140	100	20	67.5	12	22	405	500	450	550	18.5	5	M64x2	1290	1390
280M	2	610	65	460	460	160	M20x42	140	100	18	58	11	22	405	500	450	550	18.5	5	M64x2	1275	1375
280M	4-8	610	75	460	460	160	M20x42	140	100	20	67.5	12	22	405	500	450	550	18.5	5	M64x2	1390	1490
315S	2	690	65	535	535	195	M20x42	140	100	18	58	11	24	450	600	550	660	24	6	M64x2	1435	1535
315M	2	690	65	535	535	195	M20x42	140	100	18	58	11	24	450	600	550	660	24	6	M64x2	1535	1635
315L	2	690	65	535	535	195	M20x42	140	100	18	58	11	24	450	600	550	660	24	6	M64x2	1535	1635
315S	4-8	690	80	535	535	195	M20x42	170	130	22	71	14	24	480	600	550	660	24	6	M64x2	1520	1620
315M	4-8	690	80	535	535	195	M20x42	170	130	22	71	14	24	480	600	550	660	24	6	M64x2	1520	1620
315L	4-8	690	80	535	535	195	M20x42	170	130	22	71	14	24	480	600	550	660	24	6	M64x2	1620	1720
355M(V1)	2	735	75	645	645	260	M24X50	140	110	20	67.5	12	25	415	740	680	800	24	6	M72X2	1500	1600
355L(V1)	2	735	75	645	645	260	M24X50	140	110	20	67.5	12	25	415	740	680	800	24	6	M72X2	1500	1600
355M(V1)	4-8	735	95	645	645	260	M24X50	170	140	25	86	14	25	445	740	680	800	24	6	M72X2	1530	1630
355L(V1)	4-8	735	95	645	645	260	M24X50	170	140	25	86	14	25	445	740	680	800	24	6	M72X2	1530	1630
355L加长	2	735	75	645	645	260	M24X50	140	110	20	67.5	12	25	415	740	680	800	24	6	M72X2	1600	1700
355L加长	4-8	735	95	645	645	260	M24X50	170	140	25	86	14	25	445	740	680	800	24	6	M72X2	1630	1730

注:1.图中R尺寸值均为0。The 'R' dimensions is zero.
2.图中DH默认为不带螺纹的中心孔，可根据需要加工成螺纹孔。