

ECE 341 Homework 2

The problem numbers listed below are from the Lathi textbook, 3rd edition.

Prob. Number	Course Outcome	Points
2.2-1 (b, d)	1.b	20
2.3-2	1.b	20
2.4-18 *	1.b	10
2.4-27 (b, f)	1.b	30
2.5-1	7.c	20
TOTAL:		100

*** Hint: You can use Table 2.1 of the textbook (Page 176) to find the convolution.**

1-b. Evaluate and classify signals to identify unstable systems.

7-c. Apply new knowledge to understand continuous and discrete systems.

2.2.1 (b) Given the system described by

$$\ddot{y}(t) + 2\dot{y}(t) + 5y(t) = \ddot{x}(t) - 5x(t),$$

with initial conditions

$$\begin{aligned} y_{\text{zir}}(0) &= 4 \\ \dot{y}_{\text{zir}}(0) &= -1, \end{aligned}$$

begin by setting $P(D)x(t)$ to zero to find the zero-input response, $y_{\text{zir}}(t) = c_1 e^{\lambda_1 t} + c_2 e^{\lambda_2 t}$. To find λ_1 and λ_2 , solve the characteristic equation $\lambda^2 + 2\lambda + 5 = 0$, which returns two complex values,

$$\lambda_1 = -1 + j2, \lambda_2 = -1 - j2.$$

We can pick two way to solve for c_1 and c_2 : we can keep the equation in complex form and solve for the constants, or we can assume that the given system is real and therefore must have a real ZIR, which will allow us to solve for the constants c_1 and c_2 more easily. If assume that the ZIR is real, the c_1 and c_2 must be conjugates, expressed as

$$\begin{aligned} c_1 &= \frac{c}{2} e^{j\theta} \\ c_2 &= \frac{c}{2} e^{-j\theta}. \end{aligned}$$

Substituting these new constants into our expression for y_{zir} ,

$$y_{\text{zir}}(t) = \frac{c}{2} e^{j\theta} e^{(-1+j2)t} + \frac{c}{2} e^{-j\theta} e^{(-1-j2)t} = \frac{c}{2} [e^{-t} e^{j(2t+\theta)} + e^{-t} e^{j(-2t-\theta)}].$$

Simplifying using Euler's formula, $e^{jx} = \cos(x) + j \sin(x)$,

$$y_{\text{zir}}(t) = \frac{ce^{-t}}{2} [\cos(2t + \theta) + j \sin(2t + \theta) + \cos(-2t - \theta) + j \sin(-2t - \theta)].$$

Since $\cos(-x) = \cos(x)$ and $\sin(-x) = -\sin(x)$, this reduces to

$$\frac{ce^{-t}}{2} (2 \cos(2t + \theta)) = ce^{-t} \cos(2t + \theta).$$

Now, we can easily solve for c and θ in the real domain by setting $t = 0$ for $y_{\text{zir}}(t)$ and $\dot{y}_{\text{zir}}(t)$,

$$\begin{aligned} y_{\text{zir}}(t) &= ce^{-t} \cos(2t + \theta) \\ \dot{y}_{\text{zir}}(t) &= -ce^{-t} \cos(2t + \theta) - 2ce^{-t} \sin(2t + \theta). \end{aligned}$$

Setting these expressions equal to the given initial conditions with $t = 0$,

$$\begin{aligned} y_{\text{zir}}(0) &= c \cos(\theta) = 4 \\ \dot{y}_{\text{zir}}(0) &= c \cos(\theta) - 2c \sin(\theta) = -1. \end{aligned}$$

Solving for $c \cos(\theta)$ and $c \sin(\theta)$ using a system of equations,

$$\begin{bmatrix} 1 & 0 \\ 1 & -2 \end{bmatrix} \begin{bmatrix} c \cos(\theta) \\ c \sin(\theta) \end{bmatrix} = \begin{bmatrix} 4 \\ -1 \end{bmatrix}$$

$$\begin{bmatrix} 1 & 0 & 4 \\ 1 & -2 & -1 \end{bmatrix} \Rightarrow \begin{aligned} c \cos(\theta) &= 4 \\ c \sin(\theta) &= 1.5 \end{aligned}$$

Considering both terms as the two coordinates of a complex number, we may solve for c and θ as $c = \sqrt{4^2 + 1.5^2} = 4.272$ and $\theta = \tan^{-1} \frac{1.5}{4} = 0.359$, we can substitute this back into our solution for $y_{\text{zir}}(t)$, which gives us the complete ZIR,

$$y_{\text{zir}}(t) = 4.272e^{-t} \cos(2t + 0.359).$$

Finally, we can convert our values for c and θ back to c_1 and c_2 if we want, as

$$c_1 = \frac{c}{2} e^{j\theta} = 2.136e^{j0.359}$$

$$c_2 = \frac{c}{2} e^{-j\theta} = 2.136e^{-j0.359}.$$

The result is a decaying sinusoid, which is to be expected given complex-valued characteristic roots.

See Fig. 1 for a plot of the ZIR.

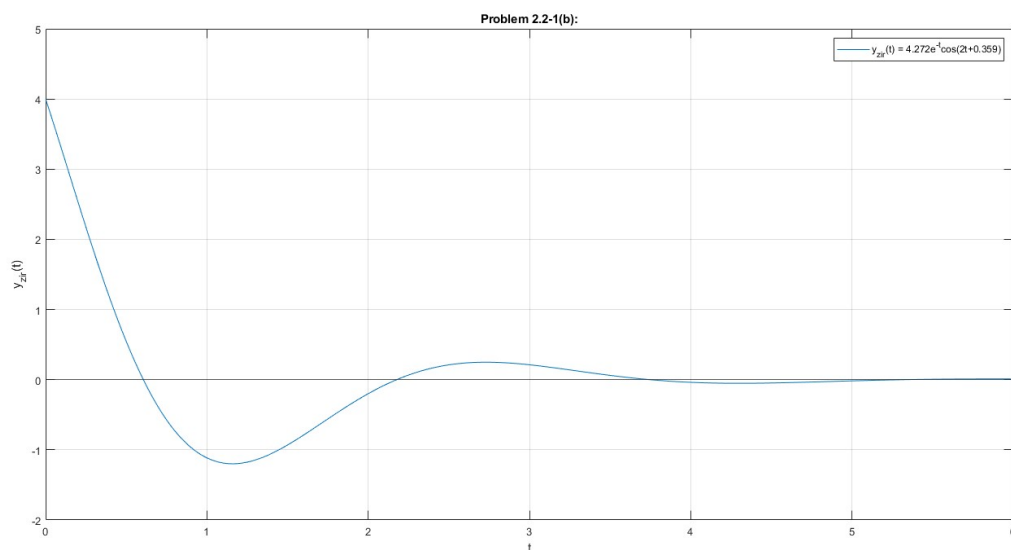


Figure 1: ZIR response

- (d) Given the system described by $D^2 + 2D + 10\{y(t)\} = (D^5 - D)\{x(t)\}$ with initial conditions $y_{\text{zir}}(0) = \dot{y}_{\text{zir}}(0) = 1$, the characteristic equation $\lambda^2 + 2\lambda + 10 = 0$, produces solutions

$$\lambda_1 = -1 + j3$$

$$\lambda_2 = -1 - j3.$$

Using the same process as for the prior problem, the corresponding ZIR and its derivative are given by

$$y_{\text{zir}}(t) = ce^{-t} \cos(3t + \theta)$$

$$\dot{y}_{\text{zir}}(t) = -ce^{-t} \cos(3t + \theta) - 3ce^{-t} \sin(3t + \theta).$$

Solving for $c \cos(\theta)$ and $c \sin(\theta)$,

$$c \cos(\theta) = 1$$

$$c \sin(\theta) = 1$$

Therefore, $c = 1$ and $\theta = 0.7854$, so

$$\begin{aligned} c_1 &= 0.5e^{j0.7854} \\ c_2 &= 0.5e^{-j0.7854}, \end{aligned}$$

and the resultant ZIR is

$$y_{\text{zir}}(t) = e^{-t} \cos(3t + 0.359).$$

2.3.2 Given the system described by $(D^2 + 4D + 3)y(t) = (D + 5)x(t)$, we may find the impulse response $h(t)$ by setting the input $x(t) = \delta(t)$, so that

$$(D^2 + 4D + 3)h(t) = (D + 5)\delta(t).$$

Because $M < N$, we may assume that there is no delta component in the impulse response, and it is exclusively composed of the system's characteristic modes. Solving for λ_1 and λ_2 ,

$$\begin{aligned} \lambda_1 &= -3 \\ \lambda_2 &= -1, \end{aligned}$$

and so

$$h(t) = (c_1 e^{-3t} + c_2 e^{-t})u(t).$$

Solving for constants c_1 and c_2 , we'll set "placeholder" initial jumps of $h(0^+) = K_1$ and $\dot{h}(0^+) = K_2$. Then, taking derivatives and limiting ourselves to the system response at $t = 0$ (meaning we can ignore its characteristic modes for the time being),

$$\begin{aligned} \dot{h}(t) &= K_1 \delta(t) \\ \ddot{h}(t) &= K_1 \dot{\delta}(t) + K_2 \delta(t). \end{aligned}$$

Then, taking the system description for $t = 0$ and replacing $\dot{h}(0)$ and $\ddot{h}(0)$ with the aforementioned impulse terms,

$$\begin{aligned} (K_1 \dot{\delta}(t) + K_2 \delta(t)) + 4K_1 \delta(t) + h(0) &= \dot{\delta}(t) + 5\delta(t), \\ K_1 \dot{\delta}(t) + (4K_1 + K_2)\delta(t) + h(0) &= \dot{\delta}(t) + 5\delta(t). \end{aligned}$$

Matching coefficients of $\dot{\delta}(t)$ and $\delta(t)$ on either side,

$$\begin{aligned} K_1 &= 1 \\ 4K_1 + K_2 &= 5, \end{aligned}$$

and so, solving for K_1 and K_2 ,

$$\begin{aligned} K_1 &= 1 \\ K_2 &= 1. \end{aligned}$$

Next, finding constants c_1 and c_2 using $h(t) = (c_1 e^{-3t} + c_2 e^{-t})u(t)$ and $\dot{h}(t) = (-3c_1 e^{-3t} - c_2 e^{-t})u(t) + (c_1 e^{-3t} + c_2 e^{-t})\delta(t)$,

$$\begin{aligned} h(0^+) &= c_1 + c_2 = 1 \\ \dot{h}(0^+) &= -3c_1 - c_2 = 1, \end{aligned}$$

so that $c_1 = -1$ and $c_2 = 2$.

Therefore, the total impulse response is given as

$$h(t) = (-e^{-3t} + 2e^{-t})u(t).$$

Using the simplified impulse matching method to confirm the results,

$$h(t) = b_0\delta(t) + [P(D)y_n(t)]u(t), \quad (1)$$

assume $b_0 = 0$, $P(D) = D + 5$ and solve for $y_n(t)$, assuming $y_n(0) = 0$ and $\dot{y}_n(0) = 1$ as

$$\begin{aligned} h(t) &= c_1 e^{-3t} + c_2 e^{-t} \\ \dot{h}(t) &= -3c_1 e^{-3t} - c_2 e^{-t} \end{aligned}$$

$$\begin{aligned} h(0) &= c_1 + c_2 = 0 \\ \dot{h}(0) &= -3c_1 - c_2 = 1 \end{aligned}$$

$$c_1 = -0.5, \quad c_2 = 0.5$$

$$y_n(t) = -0.5e^{-3t} + 0.5e^{-t}.$$

Solving for $h(t)$,

$$h(t) = [(D + 5)(-0.5e^{-3t} + 0.5e^{-t})]u(t) = [(1.5e^{-3t} - 0.5e^{-t}) + (-2.5e^{-3t} + 2.5e^{-t})]u(t).$$

Simplyfing,

$$h(t) = (-e^{-3t} + 2e^{-t})u(t),$$

which matches the initial solution for $h(t)$.

- 2.4.18 Given the system whose unit impulse response is $h(t) = [(1 - 2t)e^{-2t}]u(t)$, we can find the ZSR of the system, $y(t)$, as the convolution of the input $x(t)$ and the impulse response,

$$h(t) * x(t) = \int_0^\infty h(\tau)x(t - \tau)d\tau,$$

or

$$x(t) * h(t) = \int_0^\infty x(\tau)x(t - \tau)d\tau.$$

For input $x(t) = u(t)$, the convolution of $[(1 - 2t)e^{-2t}]u(t) * u(t)$ simplifies via the distributive property as

$$e^{-2t}u(t) * u(t) - 2te^{-2t}u(t) * u(t).$$

The two resulting convolutions are most closely matched in Table 2.1 as

$$\begin{aligned} te^{\lambda_1 t}u(t) * e^{\lambda_2 t}u(t) &= \frac{e^{\lambda_2 t} - e^{\lambda_1 t} + (\lambda_1 - \lambda_2)te^{\lambda_1 t}}{(\lambda_1 - \lambda_2)^2}u(t) \\ e^{\lambda t}u(t) * u(t) &= \frac{1 - e^{\lambda t}}{-\lambda}u(t). \end{aligned}$$

Solving for the first convolution using $\lambda = -2$,

$$e^{-2t}u(t) * u(t) = \frac{1 - e^{-2t}}{-2}u(t).$$

Solving for the second, using $\lambda_1 = -2$ and $\lambda_2 = 0$,

$$2te^{-2t}u(t) * u(t) = 2\frac{-e^{-2t} - 2te^{-2t}}{4}u(t).$$

Therefore,

$$y_{\text{zsr}}(t) = [-\frac{1}{2}e^{-2t} - \frac{1}{2}(-e^{-2t} - 2te^{-2t})]u(t) = te^{-2t}.$$

- 2.4.27 b) For $c(t) = A[u(t-3) - u(t-5)] * B[u(t+5) - u(t+3)]$, we can define areas for no overlap where $t < -2$ and $t > 2$, partial overlap where $-2 < t < 0$ and $0 < t < 2$, and full overlap at $t = 0$. Assuming $B = 2A$, arbitrarily, for the sake of the example, Fig. 2 shows the defined areas as well as the graph of the convolution itself as a function of t .

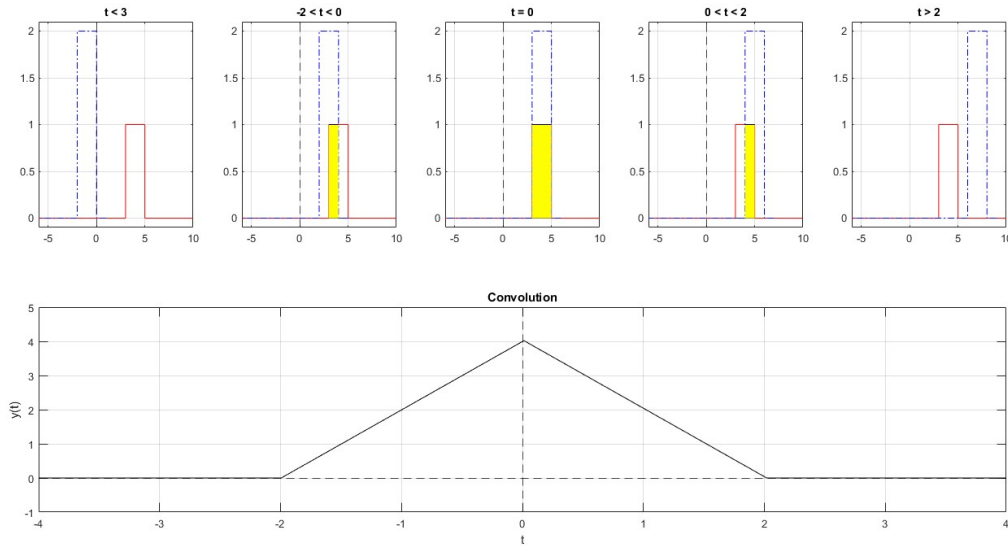


Figure 2: $c(t)$ for each area of overlap/no overlap

As shown, the convolution $c(t)$ as a function of time grows linearly from $t = -2$ to $t = 0$, up to a value of $(A \times B)^2$, and then decreases linearly from $t = 0$ to $t = 2$.

- f) For $c(t) = e^{-t} * [u(t) - u(t-3)]$, we can define an area of no overlap where $t < 0$, and an area of overlap for $t > 0$, which diminishes slowly as $t \rightarrow \infty$.

Fig. 3 shows several defined areas along with the convolution itself as a function of t .

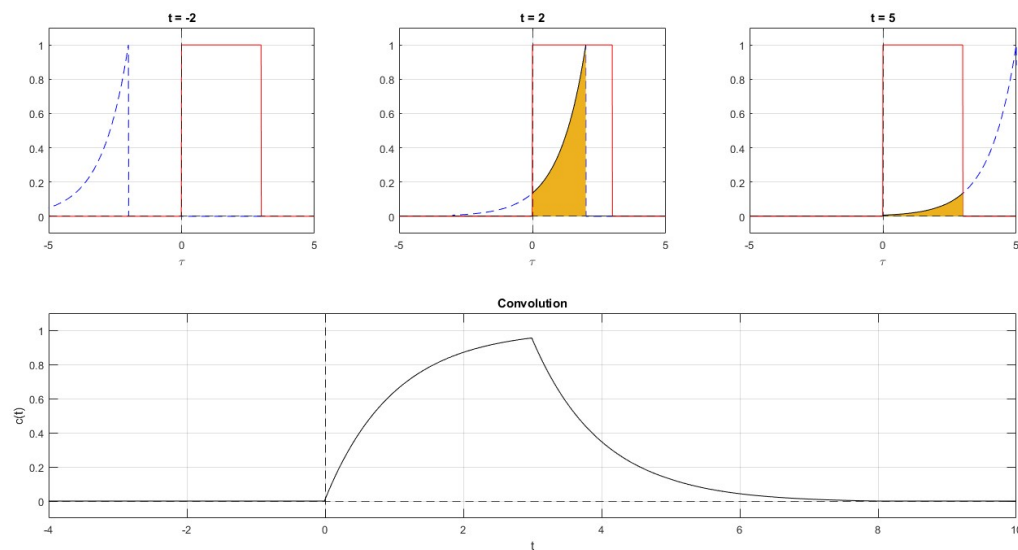


Figure 3: $c(t)$ for areas of overlap/no overlap

- 2.5.1 BIBO stability is also known as *external* stability, and is related to the stability of the system when provided with some external input. Given a bounded signal (ones that does not grow towards infinity over time), a BIBO-stable system provides a bounded output (one that does not grow towards infinity over time). As one might expect, BIBO stability can be determined from the system's impulse response $h(t)$, where BIBO-stable systems meet the criteria

$$\int_{-\infty}^{\infty} |h(\tau)| d\tau < \infty$$

BIBO stability is a natural consequence of asymptotic or *internal* stability, which, as the name suggests, depends on the system's internal dynamics when presented with no input signal. A system's asymptotic stability can be determined based on its characteristic roots; if any lie in the right half of the s-plane, the system is asymptotically unstable.

- a) (i) To determine BIBO stability, we'll investigate the impulse response $h(t)$ of the system described by $(D^2 + 8D + 12)y(t) = (D - 1)x(t)$. Using the simplified impulse matching method shown before and solving for $h(t)$ in MATLAB,

$$h(t) = \left(\frac{e^{-6t} + 3e^{-2t}}{4} \right) u(t).$$

Then, evaluating the absolute integral of $h(t)$,

$$\int_0^{\infty} |h(\tau)| d\tau \approx 0.244,$$

and so the system is **BIBO-stable**.

- (ii) BIBO-stability on its own does not imply asymptotic stability, so we'll check the criteria for asymptotic stability as well. Solving the system's characteristic equation $\lambda^2 + 8\lambda + 12 = 0$, we will find characteristic modes

$$\begin{aligned}\lambda_1 &= -6 \\ \lambda_2 &= -2\end{aligned}$$

Since both resultant characteristic modes, e^{-6t} and e^{-2t} , have a negative real part, and are thus in the left side of the s-plane, the system is considered asymptotically stable.

- b) (i) Starting again with BIBO stability, we will derive the impulse response of $D(D^2 + 3D + 2)y(t) = (D + 5)x(t)$ using MATLAB,

$$h(t) = \left(5e^{-2t} + \frac{5}{2} \right) u(t).$$

Evaluating the integral,

$$\int_0^{\infty} |h(\tau)| d\tau = \infty,$$

and so the system is **not** BIBO-stable.

- (ii) Evaluating asymptotic stability, we will find the characteristic equation $\lambda^3 + 3\lambda^2 + 2\lambda = 0$; finding its roots:

$$\begin{aligned}\lambda_1 &= 0 \\ \lambda_2 &= -2 \\ \lambda_3 &= -1,\end{aligned}$$

resulting in characteristic modes of 1, e^{-2t} , and e^{-t} . However, since one of the characteristic roots is $\lambda_1 = 0$, which lies on the imaginary axis of the s-plane, we would consider the system to be **marginally stable**; that is, when presented with a small input or disturbance, it will stabilize in a different state from its initial state prior to the input.

- c) (i) Once again, for BIBO stability, we will analyze the impulse response of $D^2(D^2 + 2)y(t) = x(t)$,

$$h(t) = \left(\frac{t}{2} - \frac{\sqrt{2}\sin(\sqrt{2}t)}{4}\right)u(t).$$

Taking the absolute integral of $h(t)$,

$$\int_0^\infty |h(\tau)|d\tau = \infty,$$

and Fso the system is *not* BIBO-stable.

- (ii) Analyzing the characteristic roots for asymptotic stability,

$$\lambda_1, \lambda_2 = 0$$

$$\lambda_3 = j\sqrt{2}$$

$$\lambda_4 = -j\sqrt{2},$$

since there are repeated roots on the imaginary axis, we consider this system asymptotically **unstable**, which matches our prior assessment of BIBO-instability.

- d) (i) For BIBO stability, we will first find the impulse response of the system $(D + 1)(D^2 - 6D + 5)y(t) = (3D + 1)x(t)$ as

$$h(t) = \frac{2}{3}e^{5t} - \frac{1}{2}e^t - \frac{1}{6}e^{-t}.$$

Taking its absolute integral,

$$\int_0^\infty |h(\tau)|d\tau = \infty,$$

and so the system is **not** BIBO-stable.

- (ii) Solving the system's characteristic equation results in the following roots:

$$\lambda_1 = 5$$

$$\lambda_2 = -1$$

$$\lambda_3 = 1,$$

and since two of the roots lie in the right side of the s-plane (positive real parts), the system is asymptotitcally **unstable**.