
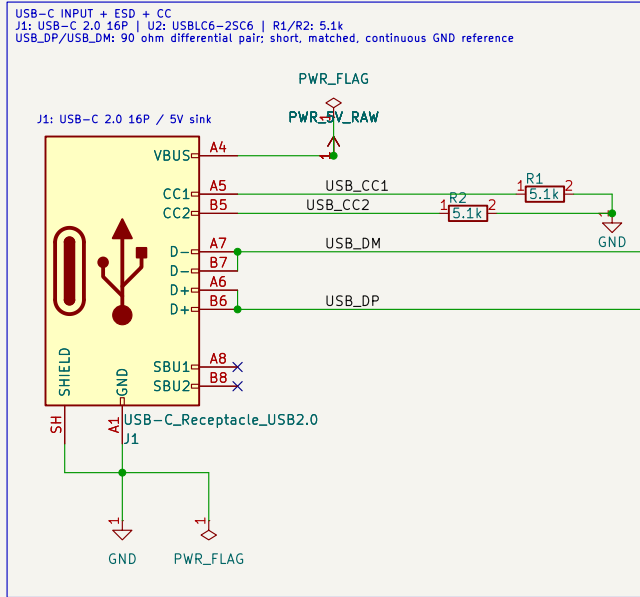


U2: USBLC6-25C6 / SOT-23-6 / USB ESD

Communicate

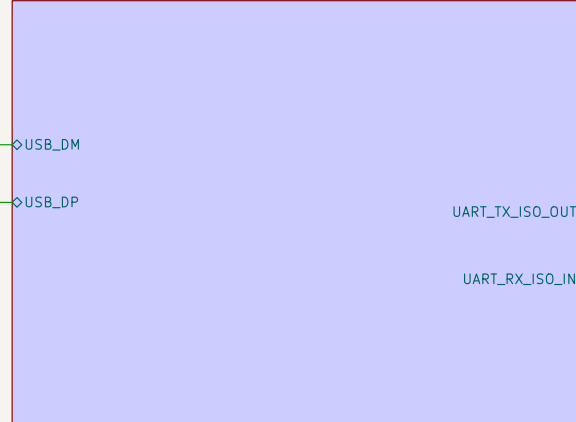

文件: Communicate.kicad_sch

POWER FLOW


PWR_5V_RAW -> [F1/ESD] -> PWR_5V_USB -> [PS1] -> PWR_5V_ISO -> [U4] -> PWR_3V3_ISO

Power



文件: Power.kicad_sch


TP3: UART_TX_ISO_OUT / 3.3V / <=5Mbps

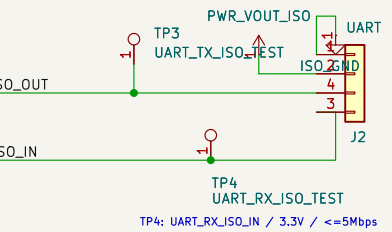




ISOLATED UART OUTPUT

J2: 1x4 2.54mm




JP1: 2-3=PWR_3V3_ISO default, 1-2=PWR_5V_ISO

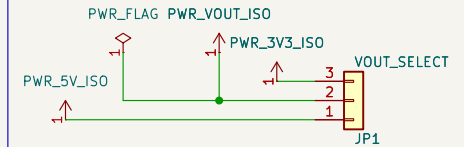

Changes			Author		Date		Rev	
Initial hierarchical isolated USB-UART			Codex		2026-09-14		0.1	
ERC cleanup and validation pass			Codex		2026-09-19		0.2	
Responsible dept.	Technical reference	Document type			Document status			
	Created by	Title, Supplementary title						
	Approved by	USB_UART_Bridge			Rev. 0.2	Date of issue 2026-09-19	Lang.	Sheet 1/3

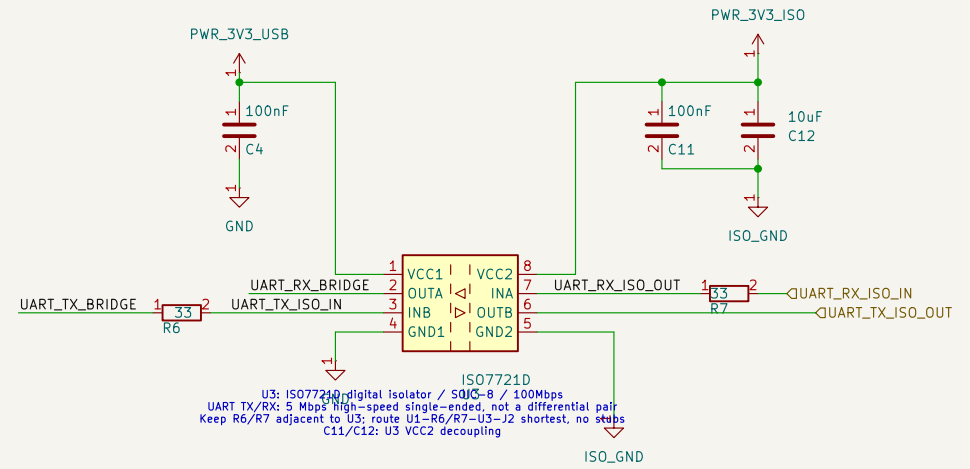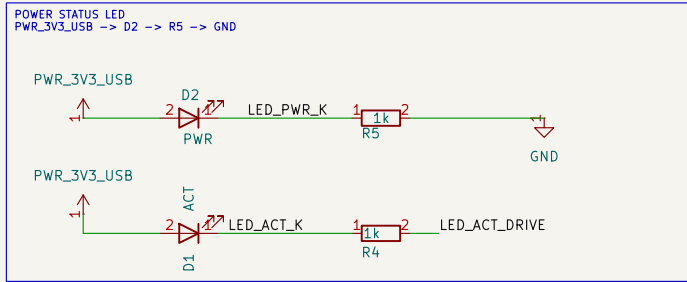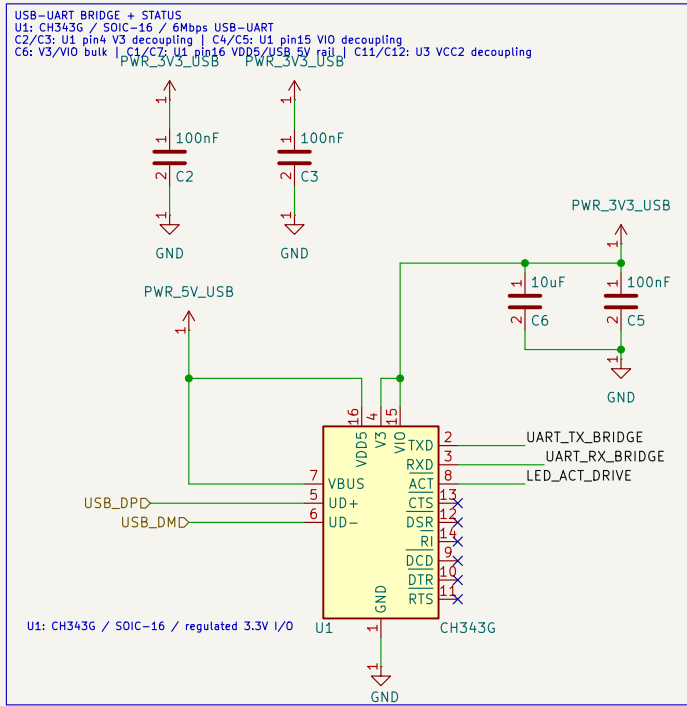

Changes			Author		Date		Rev	
Initial hierarchical isolated USB-UART			Codex		2026-09-14		0.1	
ERC cleanup and validation pass			Codex		2026-09-19		0.2	
Responsible dept.	Technical reference	Document type			Document status			
	Created by	Title, Supplementary title						
	Approved by	Communicate			Rev.	Date of issue	Lang.	Sheet
					0.2	2026-09-19		2/3

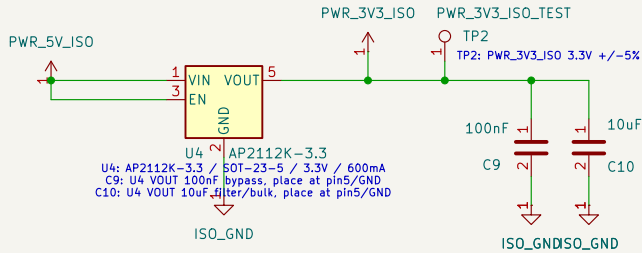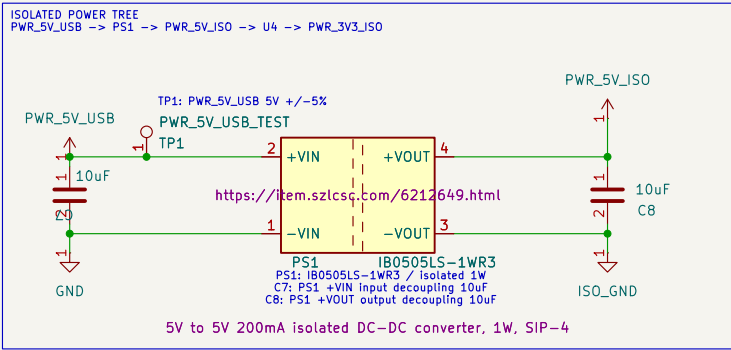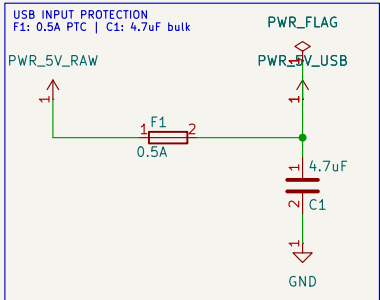

Changes			Author		Date		Rev	
Initial hierarchical isolated USB–UART			Codex		2026–09–14		0.1	
ERC cleanup and validation pass			Codex		2026–09–19		0.2	
Responsible dept.	Technical reference	Document type			Document status			
	Created by	Title, Supplementary title						
	Approved by	Power			Rev. 0.2	Date of issue 2026–09–19	Lang.	Sheet 3/3