
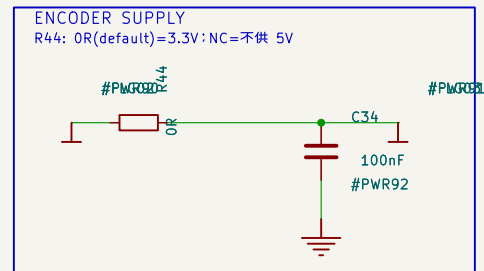


MicroDriver V2.10 - ENCODER
编码器接口 ABZ / BiSS-C / SPI:每路 100R 串阻 + ESD + 100pF, 取样点在串阻之前的编码器侧

旁路电容和 ESD 管靠近编码器接口放置

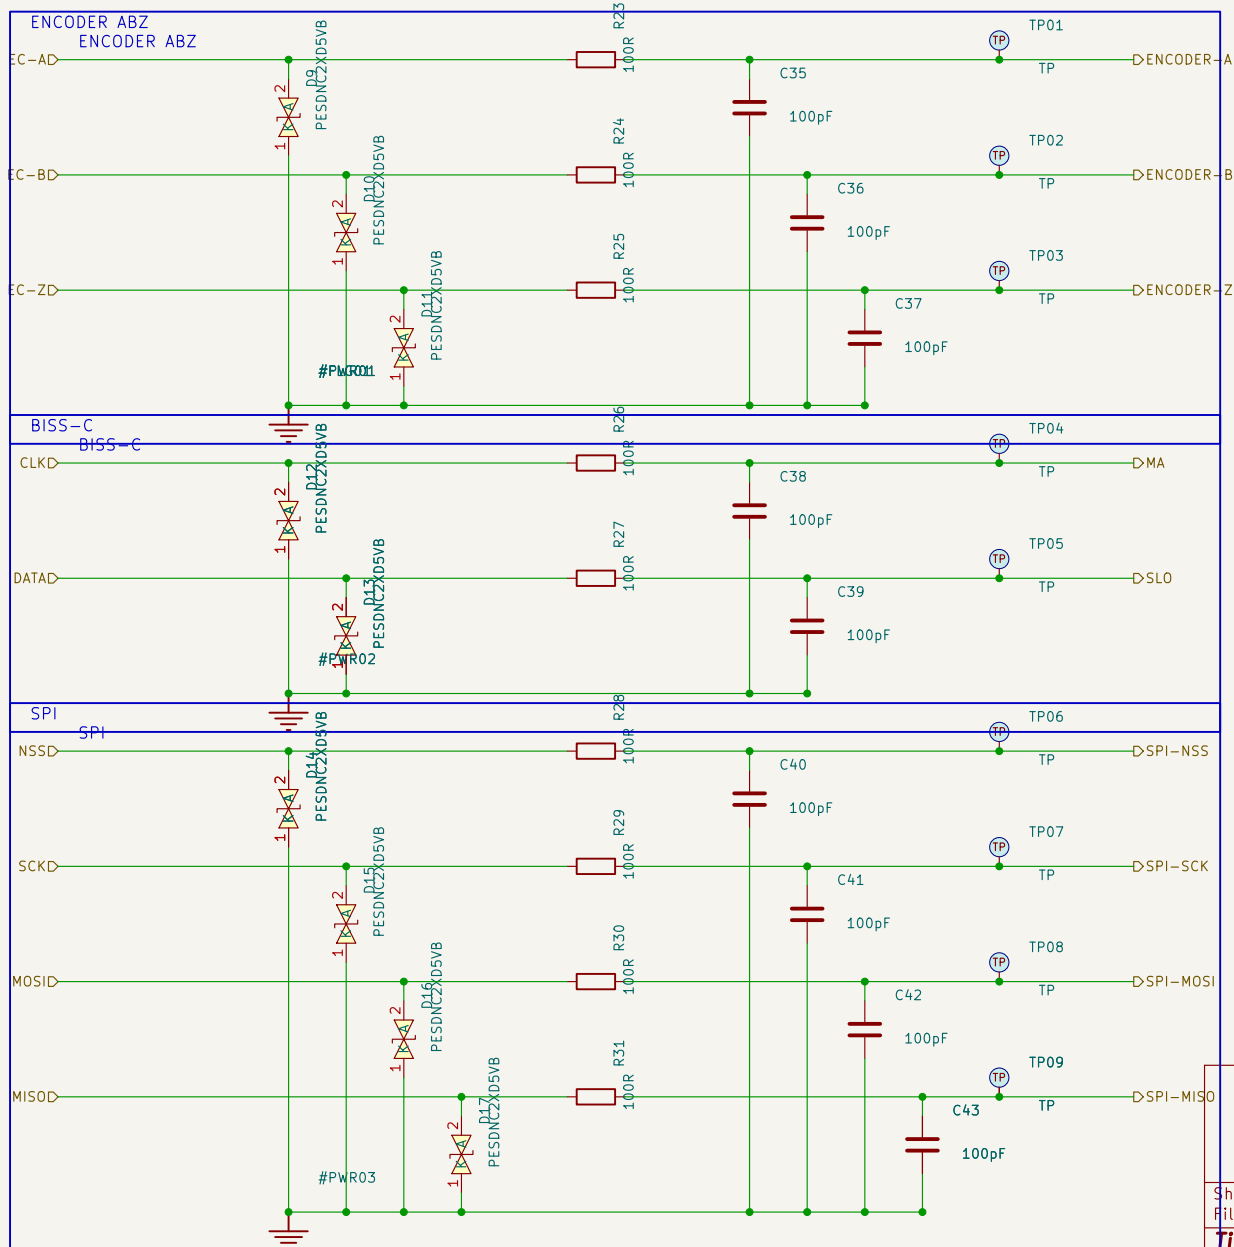

Sheet: /
File: SCH_MicroDriver_V2.10_ENCODER.kicad_sch

Title:

Size: A4
KiCad E.D.A. 10.0.6

Date:

Rev: V2.10
Id: 1/1