


MicroDriver V2.10 - POWER
VBUS_IN → 保护 → VBUS → MPM3572 降压 → 5V → TLV74333 → 3.3V


INPUT PROTECTION

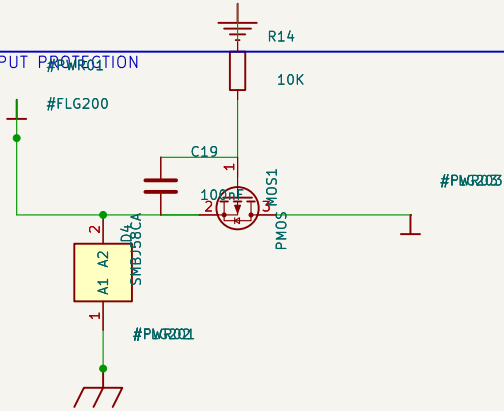

D4: SMBJ58CA 双向, 钳位 93.6V


MOS1: PMOS 反接保护: 栅极经 R14 下拉

BUS CAPACITORS

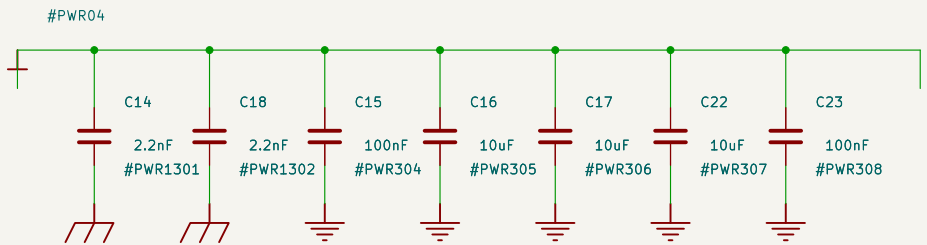

母线电容: C14/C18 2.2nF 630V 安全电容接 EGND: C15/C16/C17/C22/C23 接 GND


BUCK 5V - U2 MPM3572

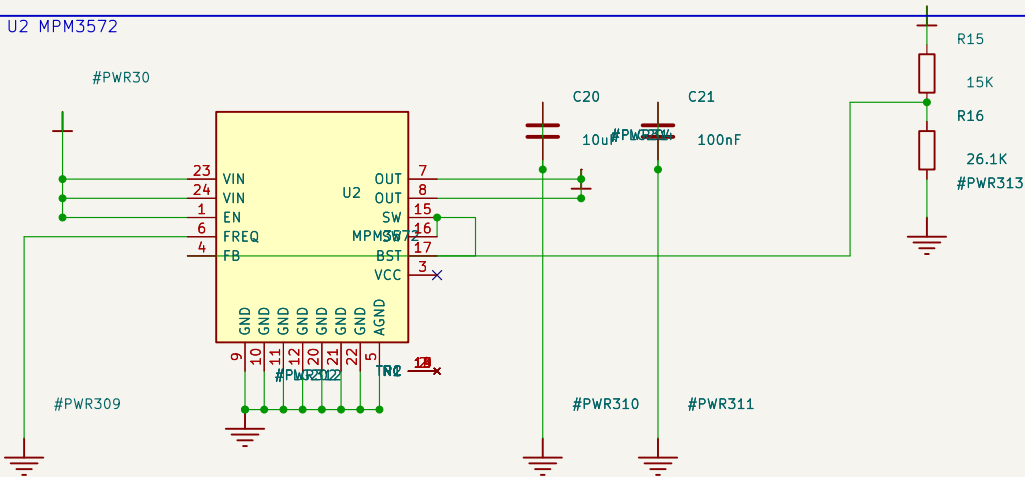


R15/R16 为 U2 反馈分压: FREQ 接 GND=400kHz 默认: BST 经内部电容到 SW

VBUS MONITOR

分压比 $4.7/(100+4.7)=1/22.28$; C24 100pF, 需与器件标定核对

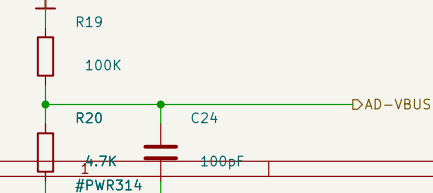

LDO 3.3V - U3 TLV74333

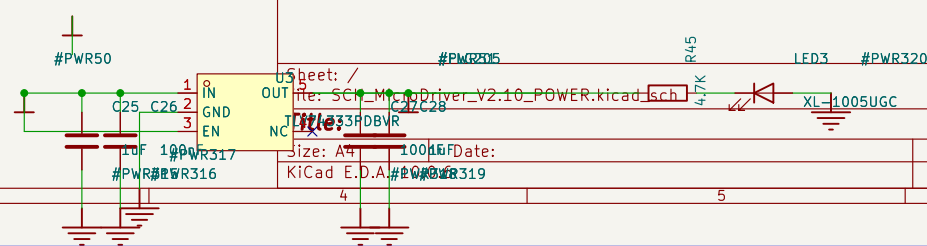

Sheet: /
Re: SC-1000 MicroDriver V2.10 - POWER.kicad.sch
Title: 3.3V LDO
Size: A4
KiCad E.D.A.
Date: 2024-08-19
Rev: V2.10
Id: 1/1