



MicroDriver V2.10 – POWER
VBUS_IN → 保护 → VBUS → MPM3572 降压 → 5V → TLV74333 → 3.3V

INPUT PROTECTION

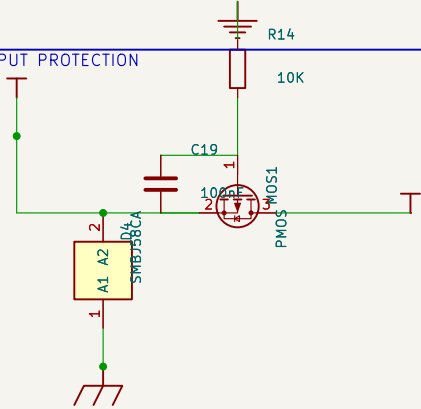


D4: SMBJ58CA 双向, 钳位 93.6V
MOS1: PMOS 反接保护:栅极经 R14 下拉

BUS CAPACITORS

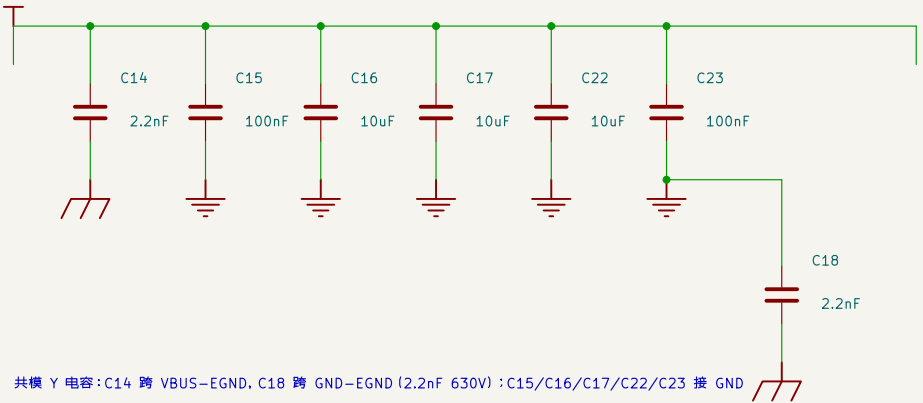

共模 Y 电容: C14 跨 VBUS-EGND, C18 跨 GND-EGND (2.2nF 630V) : C15/C16/C17/C22/C23 接 GND


BUCK 5V – U2 MPM3572

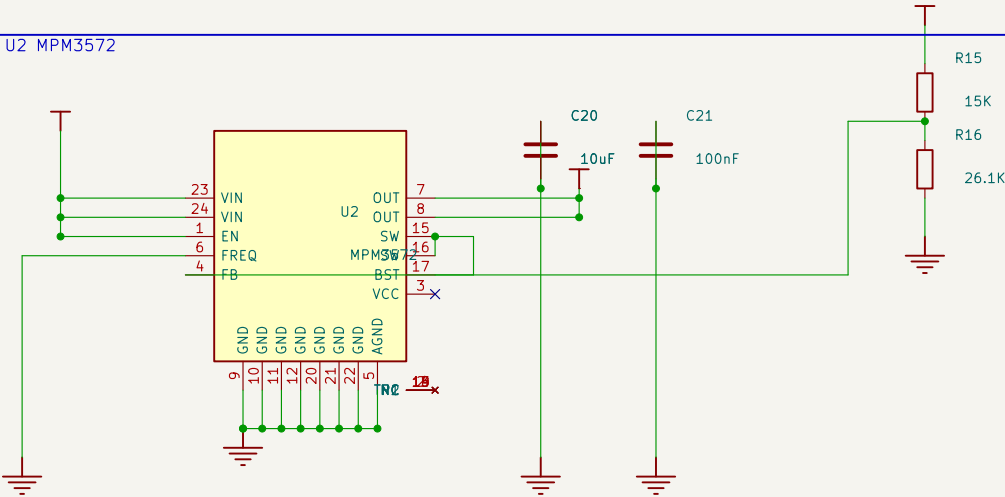


R15/R16 为 U2 反馈分压: FREQ 接 GND=400kHz 默认: BST 经内部电容到 SW

VBUS MONITOR

分压比 $4.7/(100+4.7)=1/22.28$; C24 100pF, 需与器件标定核对

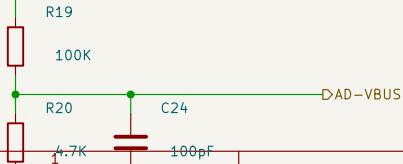

LDO 3.3V – U3 TLV74333

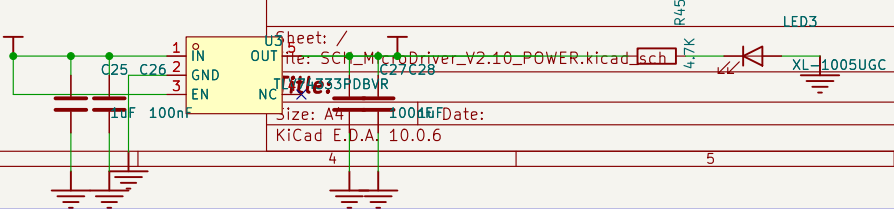

Sheet: /
Re: SC-MicroDriver-V2.10-POWER.kicad-sch
Title: 3.3V DBVR
Size: A4
KiCad E.D.A. 10.0.6
Date: 10.0.6
Rev: V2.10
Id: 1/1