




USB-C INPUT + ESD + CC
J1: USB-C 2.0 16P | U2: USBLC6-25C6 | R1/R2: 5.1k

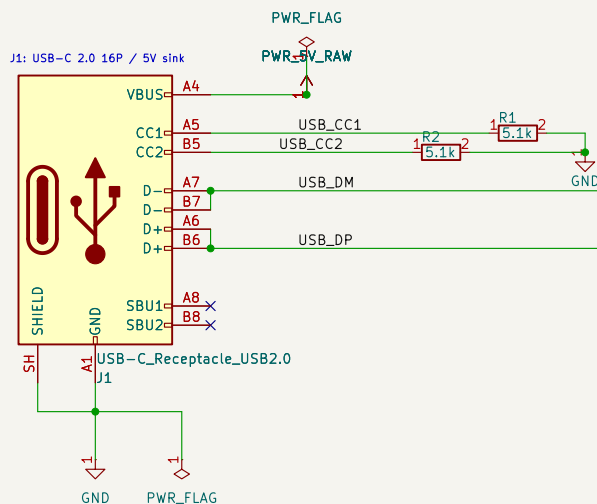


U2: USBLC6-25C6 / SOT-23-6 / USB ESD

Communicate

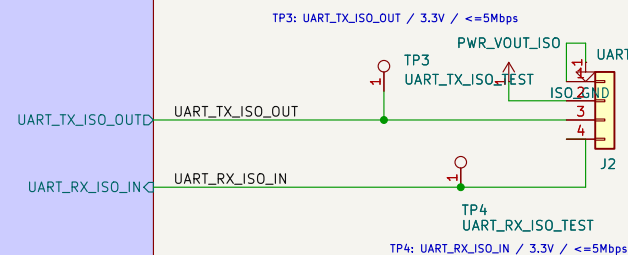


文件: Communicate.kicad_sch

POWER FLOW
PWR_5V_RAW -> [F1/ESD] -> PWR_5V_USB -> [PS1] -> PWR_5V_ISO -> [U4] -> PWR_3V3_ISO






文件: Power.kicad_sch




ISOLATED UART OUTPUT
J2: 1x4 2.54mm
JP1: 1-2=PWR_3V3_ISO default, 2-3=PWR_5V_ISO

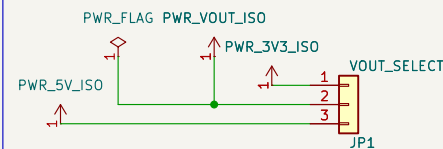

Changes			Author		Date		Rev
			Initial hierarchy		2025-09-14		0.1
			ERC cleanup		2026-09-19		0.2
Responsible dept.	Technical reference	Document type			Document status		
	Created by	Title, Supplementary title					
	Approved by	USB_UART_Bridge			Rev.	Date of issue	Lang. Sheet
					0.2	2026-09-19	1/3

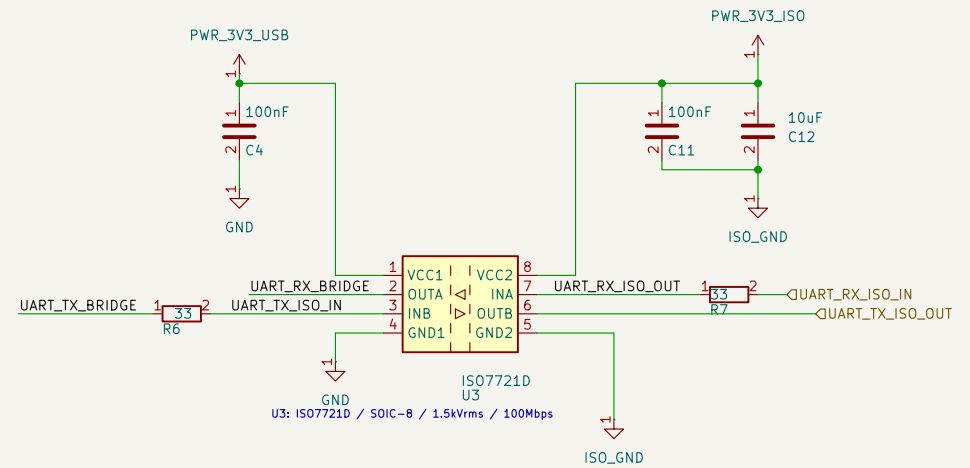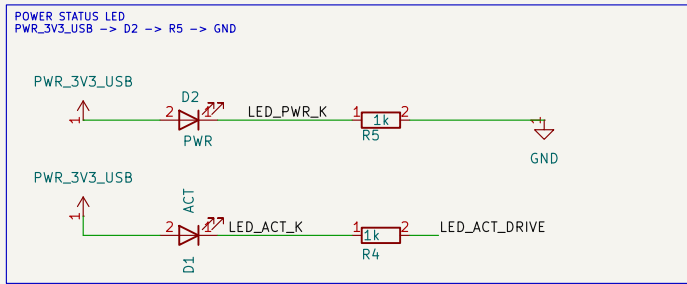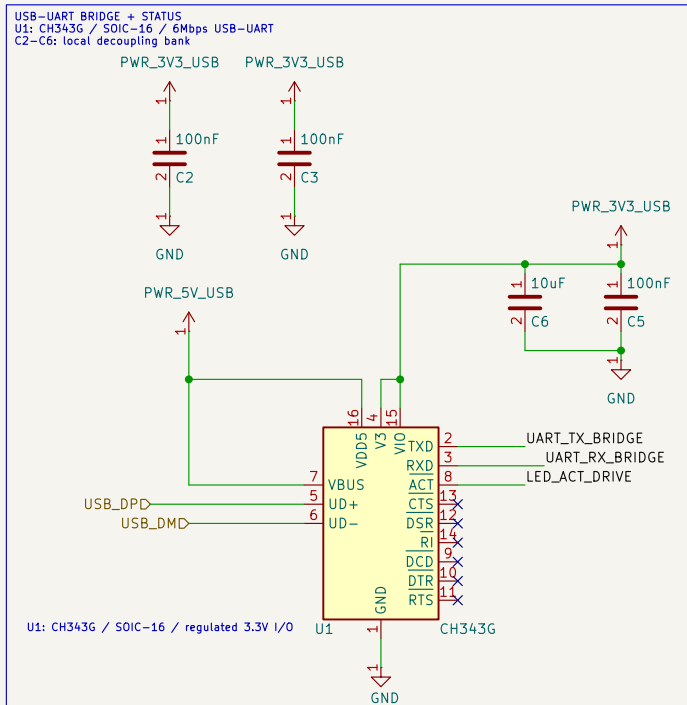

Changes			Author		Date		Rev
			Initial hierarchy	Code isolated	2026-09-14		0.1
			ERC cleanup	Code validation	pass 2026-09-19		0.2
Responsible dept.	Technical reference	Document type			Document status		
	Created by	Title, Supplementary title					
	Approved by						
		Communicate			Rev.	Date of issue	Lang.
					0.2	2026-09-19	
					Sheet		
					2/3		

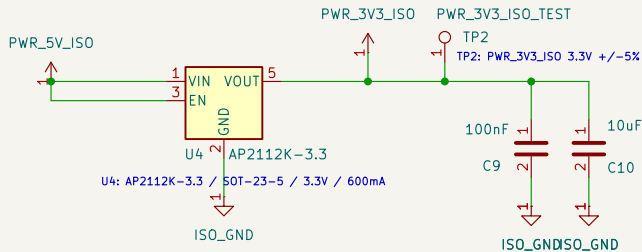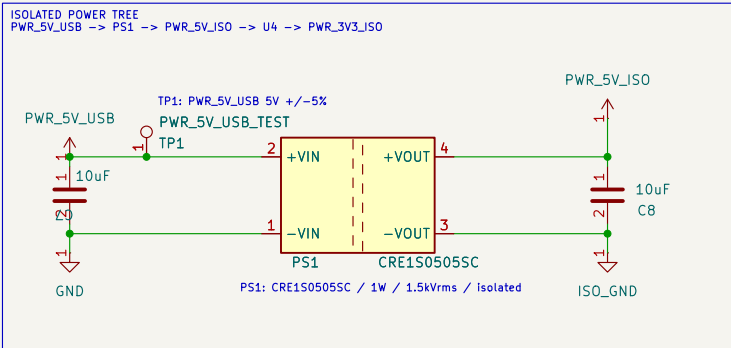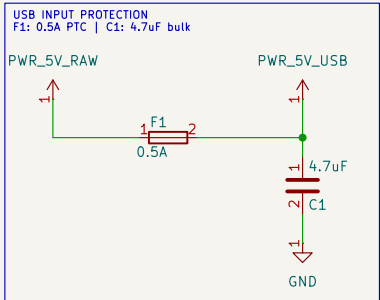

Changes				Author		Date		Rev
				Initial hierarchy	Code isolated	USB-2026-09-14		0.1
				ERC cleanup	Code validation	pass 2026-09-19		0.2
Responsible dept.	Technical reference	Document type				Document status		
	Created by	Title, Supplementary title						
	Approved by	Power				Rev.	Date of issue	Lang.
						0.2	2026-09-19	
								Sheet
								3/3