

HYDRA™

PREMIUM PUMPS // POWERED BY T-H MARINE®



BACKED BY
4,000 HOURS
OF TESTING

LIVEWELL PUMP


600 GPH
3/4" OUTLET

800 GPH
3/4" OUTLET

1100 GPH
1-1/8" OUTLET

SCAN HERE

FOR
MORE
INFO

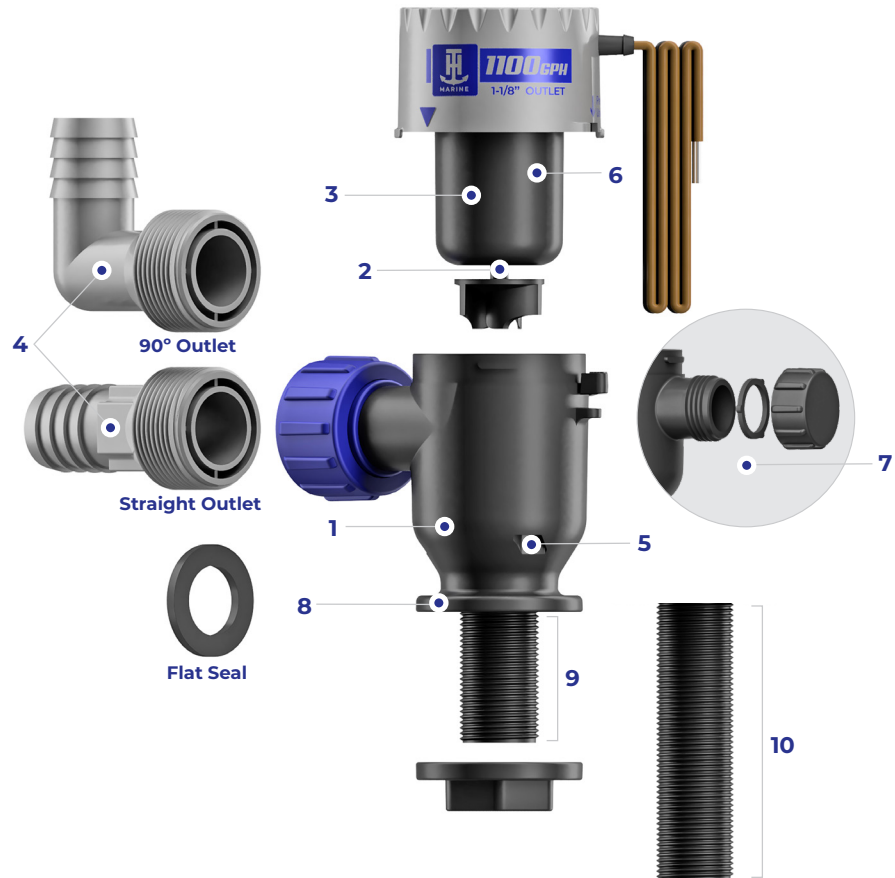

FEATURES:

Designed for consistent livewell circulation with simplified service and dual-function capability.

1. **ANTI-AIRLOCK DESIGN:** Engineered to restart reliably, even with air in the line
2. **316 STAINLESS STEEL MOTOR SHAFT:** Corrosion-resistant for long-term durability
3. **PRECISION BALANCED MOTOR:** Runs smoother with reduced vibration and noise
4. **REMOVABLE NOZZLE:** Allows quick service without disconnecting the hose
5. **STATOR VANE TECHNOLOGY:** Optimizes flow efficiency and performance
6. **DUAL-LOCK CARTRIDGE:** Designed for quick removal and fast service
7. **SECONDARY OUTLET:** Dedicated outlet for washdown pump
8. **SEALANT CHANNEL:** Integrated to prevent leaks
9. **SHORT:** 1.5" (3/4"-14) Threaded intake tube (Hole Installation Size: 1-1/16")
10. **LONG:** 3.5" (3/4"-14) Threaded intake tube (Hole Installation Size: 1-1/16")

HYDRA™

PREMIUM PUMPS // POWERED BY T-H MARINE®



DURABLE ABS HOUSING / 316 STAINLESS STEEL MOTOR SHAFT / 36 INCH, 16 AWG MARINE TINNED WIRE

SKU	PMP-LWS6
RETAIL PKG	PMP-LWS6-DP
FLOW RATE	600 GPH
AMP DRAW	Approx 3A
FUSE SIZE	4 AMP
INSTALL HOLE	1-1/16"
PACK QTY	6 inner / 12 master

SKU	PMP-LWS8
RETAIL PKG	PMP-LWS8-DP
FLOW RATE	800 GPH
AMP DRAW	Approx 4A
FUSE SIZE	5 AMP
INSTALL HOLE	1-1/16"
PACK QTY	6 inner / 12 master

SKU	PMP-LWS11
RETAIL PKG	PMP-LWS11-DP
FLOW RATE	1100 GPH
AMP DRAW	Approx 5A
FUSE SIZE	7.5 AMP
INSTALL HOLE	1-1/16"
PACK QTY	6 inner / 12 master

ABYC®



NMMA
TYPE ACCEPTED

MEETS ALL REQUIRED INDUSTRY STANDARDS

- **IGNITION PROTECTION STANDARDS:** ISO 8846 Marine / U.S. Coast Guard Rule, 33CFR-183.410
- **MARINE ELECTRICAL WIRING STANDARDS:** ABYC E-11 / U.S. Coast Guard Rule, 33CFR-183.425



Meets U.S.C.G.
Requirements

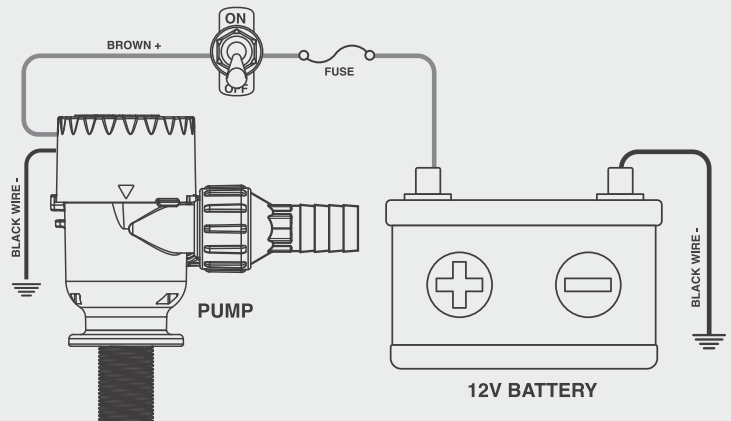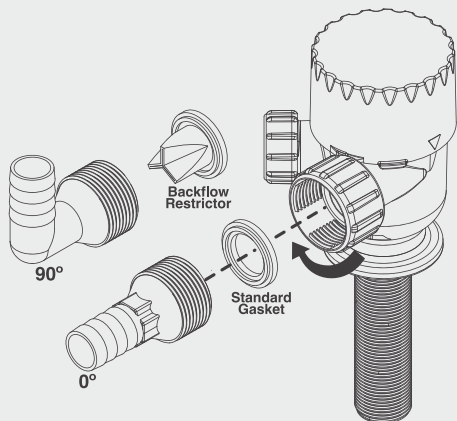

HYDRA™

PREMIUM PUMPS // POWERED BY T-H MARINE®



DURABLE ABS HOUSING / 316 STAINLESS STEEL MOTOR SHAFT / 36 INCH, 16 AWG MARINE TINNED WIRE

SKU	PMP-BLG6
RETAIL PKG	PMP-BLG6-DP
FLOW RATE	600 GPH
AMP DRAW	Approx 3A
FUSE SIZE	4 AMP
PACK QTY	6 inner / 12 master

SKU	PMP-BLG8
RETAIL PKG	PMP-BLG8-DP
FLOW RATE	800 GPH
AMP DRAW	Approx 4A
FUSE SIZE	5 AMP
PACK QTY	6 inner / 12 master

SKU	PMP-BLG11
RETAIL PKG	PMP-BLG11-DP
FLOW RATE	1100 GPH
AMP DRAW	Approx 5A
FUSE SIZE	7.5 AMP
PACK QTY	6 inner / 12 master

ABYC®



NMMA
TYPE ACCEPTED

MEETS ALL REQUIRED INDUSTRY STANDARDS

- **BILGE PUMPS STANDARDS:** ABYC H-22 / ISO 8849
- **IGNITION PROTECTION STANDARDS:** ISO 8846 Marine / U.S. Coast Guard Rule, 33CFR-183.410
- **MARINE ELECTRICAL WIRING STANDARDS:** ABYC E-11 / U.S. Coast Guard Rule, 33CFR-183.425



Meets U.S.C.G.
Requirements

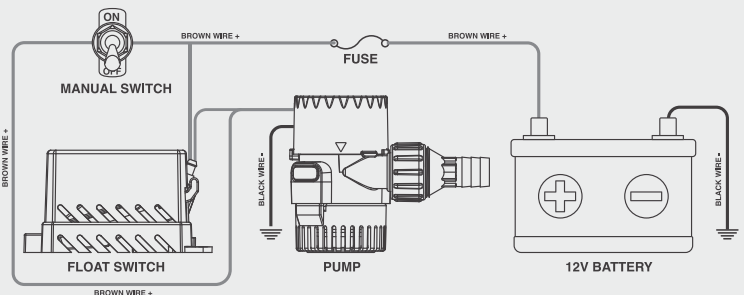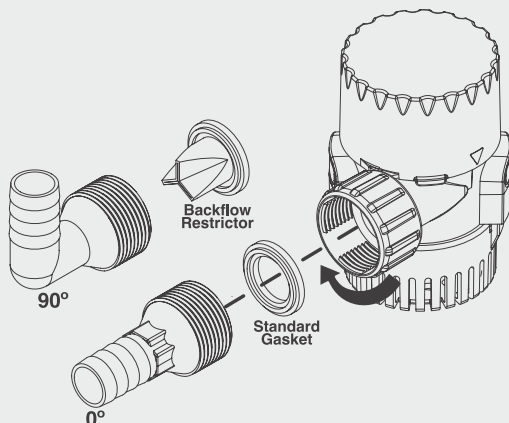

HYDRA™

PREMIUM PUMPS // POWERED BY T-H MARINE®


AUTOMATIC BILGE PUMP

800GPH 1100GPH



3/4" OUTLET

1-1/8" OUTLET

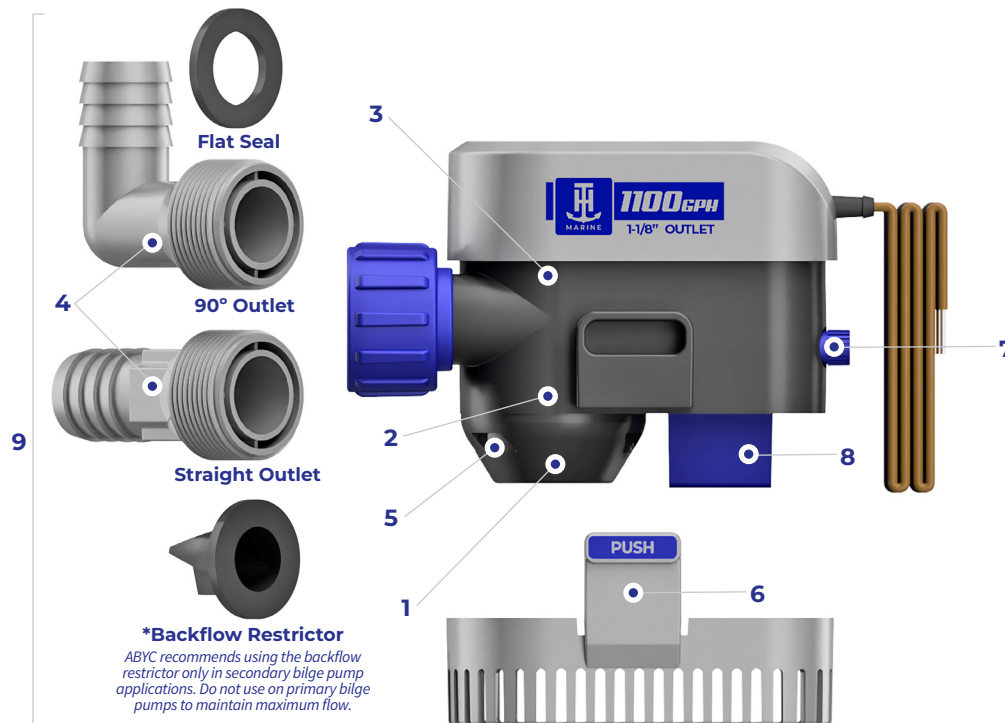

FEATURES:

Designed for OEM integration with standardized mounting patterns and simplified service access.

1. **ANTI-AIRLOCK DESIGN:** Engineered to restart reliably, even with air in the line
2. **316 STAINLESS STEEL MOTOR SHAFT:** Corrosion-resistant for long-term durability
3. **PRECISION BALANCED MOTOR:** Runs smoother with reduced vibration and noise
4. **REMOVABLE NOZZLE:** Allows quick service without disconnecting the hose
5. **STATOR VANE TECHNOLOGY:** Optimizes flow efficiency and performance
6. **POSITIVE-LOCK STRAINER BASE:** Mounting pattern matches most manufacturers
7. **EXTERNAL TEST KNOB:** Allows for quick manual testing
8. **SURE-START FLOAT SWITCH:** Corrosion-proof design for reliable start every time
9. **INCLUDES:** Flat Seal, Straight & 90° Outlet, and Backflow Restrictor*

PROGRAMMED START DELAY: Prevents false starts and prolongs pump life

START OPTIONS: Auto start via float switch or manual control through external switch

HYDRA™

PREMIUM PUMPS // POWERED BY T-H MARINE®

CARTRIDGE BILGE PUMP

600GPH

3/4" OUTLET

800GPH

3/4" OUTLET

1100GPH

1 1/8" OUTLET



***Backflow Restrictor**
ABYC recommends using the backflow restrictor only in secondary bilge pump applications. Do not use on primary bilge pumps to maintain maximum flow.

FEATURES:

Designed for applications requiring rapid motor replacement without removing the pump housing.

1. **ANTI-AIRLOCK DESIGN:** Engineered to restart reliably, even with air in the line
2. **316 STAINLESS STEEL MOTOR SHAFT:** Corrosion-resistant for long-term durability
3. **PRECISION BALANCED MOTOR:** Runs smoother with reduced vibration and noise
4. **REMOVABLE NOZZLE:** Allows quick service without disconnecting the hose
5. **STATOR VANE TECHNOLOGY:** Optimizes flow efficiency and performance
6. **POSITIVE-LOCK STRAINER BASE:** Mounting pattern matches most manufacturers
7. **DUAL LOCK CARTRIDGE:** Designed for quick removal and fast service
8. **INCLUDES:** Flat Seal, Straight & 90° Outlet, and Backflow Restrictor*

HYDRA™

PREMIUM PUMPS // POWERED BY T-H MARINE®



DURABLE ABS HOUSING / 316 STAINLESS STEEL MOTOR SHAFT / 36 INCH, 16 AWG MARINE TINNED WIRE

SKU	PMP-BLGA8
RETAIL PKG	PMP-BLGA8-DP
FLOW RATE	800 GPH
AMP DRAW	Approx 4A
FUSE SIZE	5 AMP
PACK QTY	6 inner / 12 master

SKU	PMP-BLGA11
RETAIL PKG	PMP-BLGA11-DP
FLOW RATE	1100 GPH
AMP DRAW	Approx 5A
FUSE SIZE	7.5 AMP
PACK QTY	6 inner / 12 master

ABYC

NMMA
TYPE ACCEPTED

MEETS ALL REQUIRED INDUSTRY STANDARDS

- **BILGE PUMPS STANDARDS:** ABYC H-22 / ISO 8849
- **IGNITION PROTECTION STANDARDS:** ISO 8846 Marine / U.S. Coast Guard Rule, 33CFR-183.410
- **MARINE ELECTRICAL WIRING STANDARDS:** ABYC E-11 / U.S. Coast Guard Rule, 33CFR-183.425



Meets U.S.C.G.
Requirements

