

LECTROTAB

Electromechanical Trim Tab Systems



LECTROTAB

All Lectrotab actuators are precision-engineered to combine quiet operation with a non-hydraulic, maintenance free design.

The unit is corrosion free, ensures very accurate tab positioning, provides maximum lift force, and is totally self-contained for easy installation. An internally designed friction brake prevents unwanted tab retraction when underway or backing down.

The actuator assembly is packaged in a non-metallic permanently sealed housing. Our unique design incorporates dual o-rings to seal out water around the ram, and a check-valve & vent tube system that pressurizes the actuator every time it retracts. These two design features alone make the actuator extremely robust and reliable. No components need to be installed inside the boat. Most importantly, unlike hydraulic trim tabs, there is no oil to leak out.


The actuators incorporate either a standard or low profile transom mounting bracket and are available in 12V and 24V DC with standard long, short or heavy duty style housings.

Why Choose Lectrotab?

- World Class Customer Support
- Unique Design Features
- Stainless or Alloy Tab Plates
- Automatic Leveling Control
- NMEA 2000 Compatibility

ACTUATORS

- A** Upper seal, located above any point on the ram which is exposed to fouling, cannot be damaged and is the primary ram sealing element.
- B** Hardened steel free wheeling ballscrew provides up to 1000 pounds of force to the tab and eliminates electrical limit switches inside the actuator.
- C** Controlled torque thrust bearing surface for good service life and positive braking against reverse freewheeling. Prevents unwanted tab retraction when under way.
- D** Actuator has a completely non-metallic exterior for absolute resistance to corrosion.
- E** Greased and sealed 40:1 planetary gearbox provides smooth, quiet, high-torque drive to the ballscrew.
- F** Reversible D.C. motor is torque limited to protect the gear box and is instantly stopped when the control switch is released to prevent ram overtravel.
- G** Electromagnetic suppression device assures compliance with European CE standards and eliminates voltage spikes for better control switch contact life.
- H** Vent-tube check valve allows air in but not out, thus providing automatic internal pressurization to about 8 PSI when the tab is retracted.
- I** Upper actuator cover is sealed watertight with epoxy
- J** Upper bracket can be positioned from vertical through horizontal.

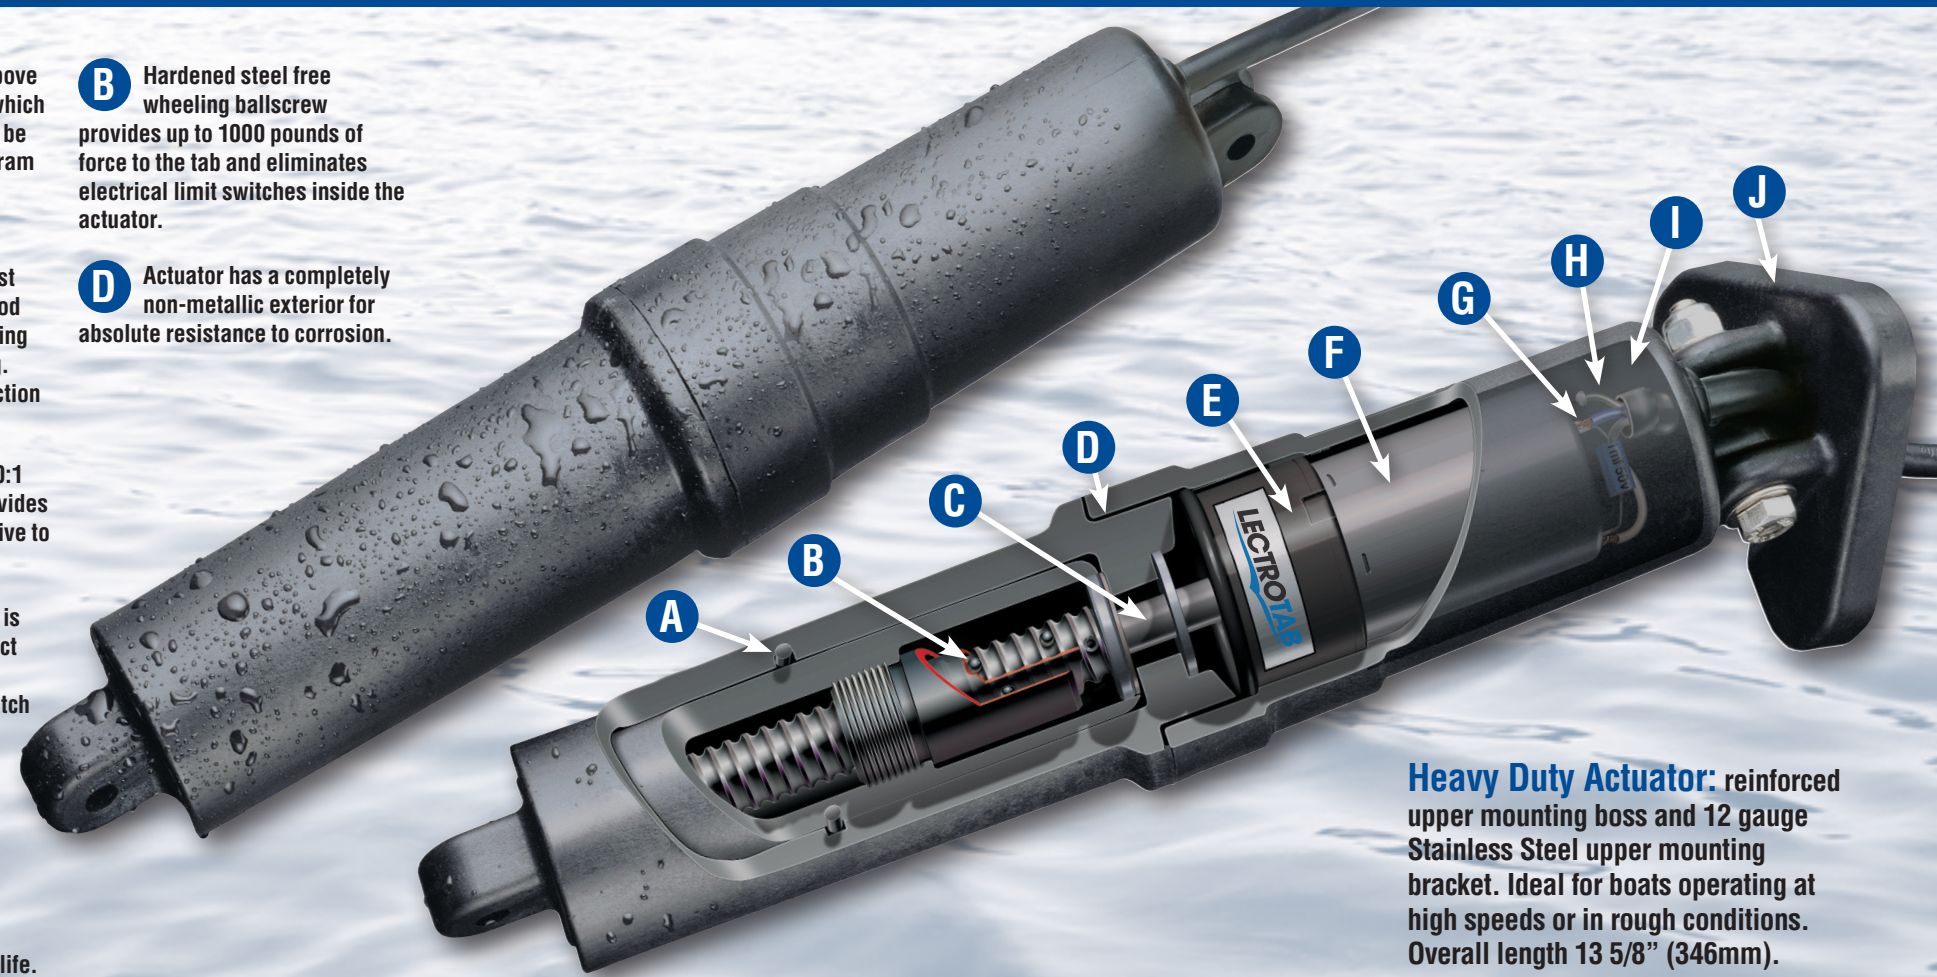

Heavy Duty Actuator: reinforced upper mounting boss and 12 gauge Stainless Steel upper mounting bracket. Ideal for boats operating at high speeds or in rough conditions. Overall length 13 5/8" (346mm).

Standard Actuator: our most popular design, operates on all sizes and styles of boats (shown above). Overall length 13 5/8" (346mm).

Short Actuator: with low profile upper bracket is the perfect fit for trim tab applications where there is limited vertical space such as a swim platform. Overall length 11" (279mm).

Long Actuator: for applications where a longer throw is required. Available in 4" stroke length. Overall length 15 3/8" (390mm) with low profile bracket.

STAINLESS STEEL TABS

Single Actuator



Dual Actuator



The Lectrotab stainless steel trim tab design provides unmatched strength and reliability. All stainless steel tabs are fabricated with a continuous rolled and pinned hinge, eliminating the need for welding.

- Corrosion resistant 11 or 12 gauge, 304 or 316 stainless steel
- Standard finish, mirror finished stainless steel or gloss black powder coated stainless steel
- Standard tabs are available in 9" (23cm), 12" (30cm) and up to 24" (61cm) chord lengths and in widths between 9" (23cm) and 48" (122cm)
- All tabs exceeding a 24" (61cm) width feature a 90° bent up trailing edge for additional strength
- Tabs are available with edges bent (various angles), straight or tapered, dual actuator channels and reinforced in any way
- For galvanic protection, pre-installed zinc anodes are also available

CONTROL OPTIONS


Rocker Switch



Performs all standard trim tab control functions.

- Improved sealing to prevent water entry
- Higher load rating
- Recessed rocker prevents breaking

One-Touch Control



Combines a microprocessor based trim tab control with LED tab position indicators.

- One-Touch operation with LED tab position indicators
- Dedicated buttons for simultaneous movement of both tabs up or down
- Automatic tab position return
- Completely sealed and waterproof

Manual Leveling Control



Manually operated LED control with one touch tab positioning.

- Single button touch to raise/lower both tabs
- Tabs automatically return to previous position
- Completely sealed and waterproof
- No external power module required

Automatic Leveling Control



Automatically corrects roll and pitch for a more comfortable boating experience.

- Controls pitch and roll automatically
- Completely sealed and waterproof
- Automatic tab retraction
- No external power module required (ALC-1)

Note: Lectrotab control switches are available for dual station applications. Refer to the Control Switch product specification sheets located at www.lectrotab.com for more information.

ALUMINIUM TABS

The Lectrotab aluminum alloy trim tabs are uniquely designed to meet the needs of aluminum hulled boats and are an economical option for all boats.

- Fabricated with an extremely strong “no-break” polypropylene hinge
- Marine grade 6005-T5 aluminum alloy material
- Sealed with a corrosion resistant epoxy coating
- Available in 9”(23cm) and 12”(30cm) chord lengths and in widths between 9” (23cm) and 48” (122cm)
- Also available with drop fins or supports



CUSTOM TABS

Lectrotab designs custom and heavy duty tabs to meet customers' specifications with unmatched strength and reliability.

- Continuous rolled and pinned hinge design provides ultimate strength and eliminates the need for welding
- Mirror, black powder coated, standard and other finishes available
- Strong, corrosion resistant 11 and 12 gauge stainless steel
- Zinc anodes may be installed for additional corrosion protection
- Available with bent edges and channels for additional strength
- Available in single or dual actuator mounting
- Edge mount tabs available



'READY TO INSTALL' KITS

Standard Lectrotab kits contain two 12V or 24V DC actuators, two trim tab plates, extended actuator cable and control switch.

- Available with stainless steel, aluminum or custom tabs
- Standard kits include choice of Rocker Switch, One Touch, Manual or Automatic Leveling Controls
- Kits are available with or without mounting hardware



Visit www.lectrotab.com for more information...

- Lectrotab products
- Tab plate sizing guidelines
- Technical product specification sheets
- Wiring diagrams and Installation Manuals
- Hydraulic retrofit instructions
- Advantages of electric over hydraulic systems
- Where to buy Lectrotab products

LECTROTAB

Lineair Devices Corporation • 11126 Air Park Road • Suite G • Ashland, VA 23005
Tel: 804-368-8428 • Fax: 804-368-8438 • Email: sales@lectrotab.com

www.lectrotab.com • Toll Free 1-888-LECTROTAB (532-8768)

NEW! Lectrotab Marine Linear Actuators

Legendary Performance and Reliability at Competitive Prices



LECTROTAB

Lectrotab's NEW marine linear actuators are ideal for hatch lifters, engine covers, automated ventilation covers, seat motion, and a variety of other marine applications. These direct drop-in replacement actuators are ***very competitively priced!***

Marine Linear Actuators:

- Design utilizes the same internal pressure equalization system as the reliable Lectrotab trim tab submersible models
- Internal brake system prevents unwanted movement when supporting open hatches
- Precision gears provide quiet operation
- Actuators are designed to push 400 lbs of force, 2000 lbs. holding force
- Actuators available in stroke lengths from 4" (152mm) to 24" (610mm)
- Free spinning ballscrew at full deployment and retraction eliminates the need for limit switches
- The non-metallic cover, stainless steel internal ram and epoxy coated outer housing prevent corrosion (anodized clear or black options available)

Contact Brunger Export for Pricing and Availability

Linear Devices Corporation
11191 Air Park Road, Ashland, VA 23005
www.lectrotab.com, Ph. 804-368-8428

LECTROTAB



Marine Linear Actuators




6" stroke actuator with
Brackets (fully extended)

Marine linear actuators are ideal for hatch lifts, engine covers, automated ventilation covers, seat adjustment and a variety of other marine applications. They are available in stroke lengths from 4" (101.6 mm) to 24" (610 mm). Lectrotab linear actuators are designed to perform in the same extreme marine environment as the Lectrotab trim tab actuators and are precision-engineered to combine quiet operation with a non-hydraulic, maintenance free design. They ensure accurate positioning, provide maximum lift force, and are totally self-contained for easy installation. The actuators accept a variety of mounting brackets and hardware to adapt to most installations and brands and provide access during a loss of power. All extended length actuators come in 12 and 24 VDC.

FEATURES

- Extended length actuators are perfect for hatches, vents and engine covers, seat adjustment, cooler slides, windows and a variety of other marine applications.
- Design utilizes the same internal pressure equalization system as the reliable Lectrotab trim tab submersible models
- Actuators can replace most popular hydraulic and electromechanical hatch lift systems
- Internal brake system prevents unwanted movement when supporting open hatches
- Precision gears provide quiet operation
- All actuators are designed to push 400 lbs of force, 2000 lbs. holding force
- Actuators available in stroke lengths from 4" (152mm) to 24" (610mm) and extended lengths of 18.5" (661mm) to 61" (1,550mm)
- Free spinning ballscrew at full deployment and retraction eliminates the need for limit switches
- The non-metallic cover, stainless steel internal ram and epoxy coated outer housing prevent corrosion (anodized clear or black options available)

MARINE LINEAR ACTUATOR MOUNTING DIMENSIONS

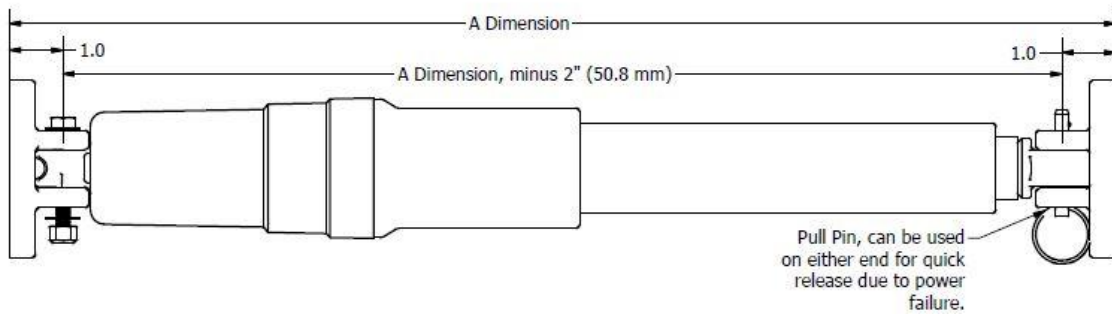

MARINE LINEAR ACTUATOR SPECIFICATIONS

Model	DC Voltage	Stroke Length	Stroke Time	"A" Distance OAL Surface to Surface Retracted	"A" Distance OAL Surface to Surface Deployed	Cable Length (Feet/Meter)	Upper and Lower Mounting Brackets
H-BK-4	12VDC	4"/101.6 mm	7 sec.	14.5"/368.3mm	18.5"/469.9mm	6'/1.8m	Yes
H-BK-6	12VDC	6"/152.4 mm	10 sec.	20"/508 mm	26"/660.4 mm	6'/1.8m	Yes
H-BK-8	12VDC	8"/203.2 mm	14 sec.	20"/508 mm	28"/711.2 mm	6'/1.8m	Yes
H-BK-12	12VDC	12"/304.8 mm	21 sec.	24"/609.6 mm	36"/914.4 mm	6'/1.8m	Yes
H-BK-16	12VDC	16"/406.4 mm	29 sec.	29"/736.6 mm	45"/1143 mm	6'/1.8m	Yes
H-BK-18	12VDC	18"/457.2 mm	32 sec.	31"/787.4 mm	49"/1244.6 mm	6'/1.8m	Yes
H-BK-20	12VDC	20"/508 mm	36 sec.	33"/838.2 mm	53"/1346.2 mm	6'/1.8m	Yes
H-BK-24	12VDC	24"/609.6 mm	43 sec.	37"/939.8 mm	61"/1549.4 mm	6'/1.8m	Yes

HB-BK-4	24VDC	4"/101.6 mm	7 sec.	14.5"/368.3mm	18.5"/469.9mm	6'/1.8m	Yes
HB-BK-6	24VDC	6"/152.4 mm	10 sec.	20"/508 mm	26"/579.4 mm	6'/1.8m	Yes
HB-BK-8	24VDC	8"/203.2 mm	14 sec.	20"/508 mm	28"/711.2mm	6'/1.8m	Yes
HB-BK-12	24VDC	12"/304.8 mm	21 sec.	24"/609.6 mm	36"/914.4 mm	6'/1.8m	Yes
HB-BK-16	24VDC	16"/406.4 mm	29 sec.	29"/736.6 mm	45"/1143 mm	6'/1.8m	Yes
HB-BK-18	24VDC	18"/457.2 mm	32 sec.	31"/787.4 mm	49"/1244.6 mm	6'/1.8m	Yes
HB-BK-20	24VDC	20"/508 mm	36 sec.	33"/838.2 mm	53"/1346.2 mm	6'/1.8m	Yes
HB-BK-24	24VDC	24"/609.6 mm	43 sec.	37"/939.8 mm	61"/1549.4 mm	6'/1.8m	Yes

MARINE LINEAR ACTUATOR ACCESSORIES



SF-HL

Single actuator, rocker switch, reverse polarity, 12 or 24 VDC



HL-SM

Slide Bracket Assembly allows lifting hatch in the event of a power failure. Includes required attachment hardware.



One-Touch Leveling LED Control



SLC-11

Lectrotab is excited to introduce a new control incorporating features requested by boat owners to provide a user friendly control for a more enjoyable boating experience.

- One-Touch button to raise/lower tabs
- Automatic tab position return
- Completely sealed and waterproof

FEATURES

- Microprocessor based trim tab control with LED tab position indicators
- Single button press to move both tabs up or down simultaneously
- Direct replacement for Oval LED (SETR-61) controls
- Automatic return to last tab position if ignition key is turned off and back on again
- Completely sealed, completely waterproof and will not deteriorate in sunlight
- Automatic tab retraction and calibration with key or accessory switch off
- Easy upgrade from rocker switch style control
- No external power module required for single or dual actuator per tab systems
- LED tab position indicators dim automatically in darkness and brighten in sunlight
- Adjustable programming features located on back of specification sheet
- Operates on 12 or 24 volt dc systems

SPECIFICATIONS


Model Number	Display Color	Number of Stations/Actuators	Overall Width	Overall Height/Thickness	Mounting Hole Cutout (Diameter)	DC Voltage	Fuse Size Power Input (1 Actuator per Tab)	Fuse Size AUX Terminal (MUST CONNECT)
SLC-11	Black	1 or 2 Stations/ 1 or 2 Actuators/tab	3.0"/ 77mm	3.0"(77mm)/ .437"(11mm)	2.0"/50mm	12/24	12vdc = 15 or 20 amp 24vdc = 10amp	1 to 2 amp

Linear Devices Corporation
11126 Air Park Road, Suite G, Ashland, VA 23005
www.lectrotab.com, Ph 804-368-8428, Fax 804-368-8438
October 2018



SLC WIRING and DIMENSIONS

"SLC-11" Control Installation/Wiring Diagram

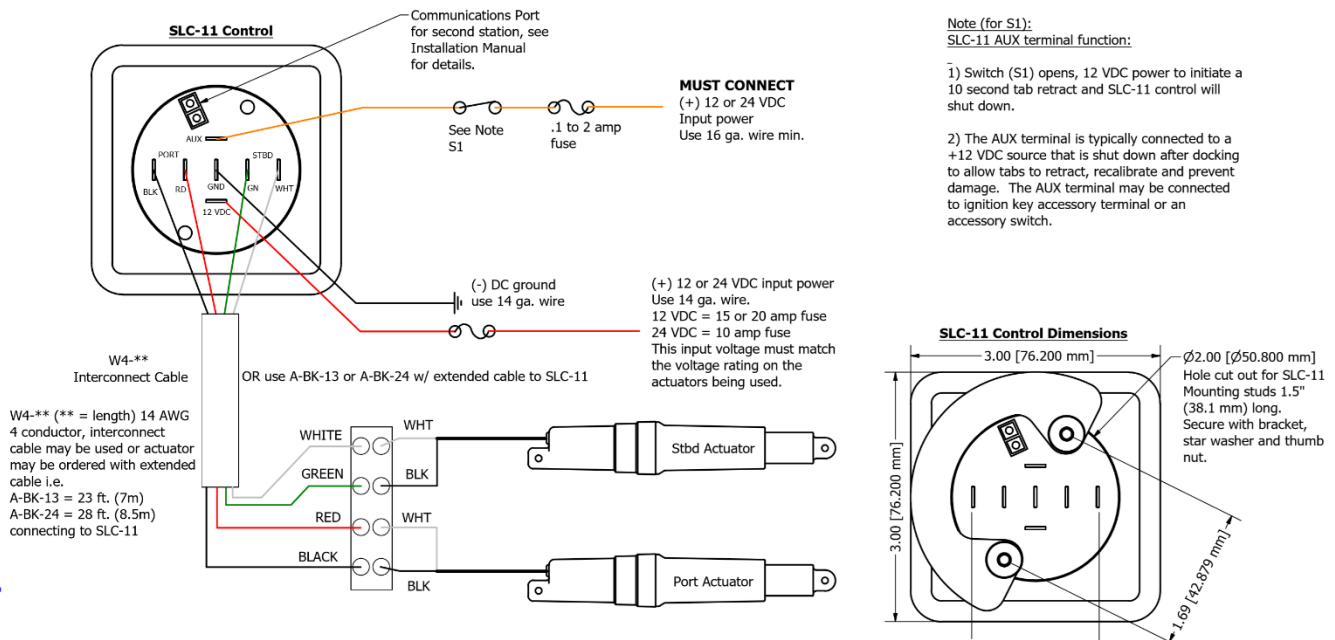

SLC PROGRAMMING

Program Mode Sequence						
Setting	Enter	Change Setting	Exit and Save	Range	Default	Program Details
Timing	Port Bow Down	Press and hold Stbd. Bow Up/Down	Port Bow Up	4 - 12 seconds	8 sec.	8 LEDs = 8 second actuator 4 LEDs = 4 second actuator
Swap LEDs	Starboard Bow Down	Stbd. Bow Up/Down	Port Bow Up	LEDs opposite or same side as button press	LEDs opposite	1 LED each side = LEDs opposite button press 8 LEDs each side = same side
Remember last tab setting	Port Bow Up	Stbd. Bow Up/Down	Port Bow Up	Standard retract/Remember last tab setting	Standard	8 LEDs each side = Standard 1 LED each side = Remember last tab setting
Disable Auto Tab Retract	All Up and All Down Simultaneously for 2 seconds or longer	Stbd. Bow Up/Down	Port Bow Up	Enable/Disable	Disable	1 LED each side = Auto Tab Retract Enable 8 LEDs each side = Auto Tab Retract Disable

Enter, Adjust and Exit Program Mode:

- Before entering program mode, 12vdc or 24vdc must be applied to Oval main power
- Power to AUX terminal must be OFF (Aux is typically connected to ignition key switch or aux switch)
- Press and hold button noted in Programming chart under column "Enter" for more than 2 seconds while switching the Aux terminal switch to ON at the same time
- Release the "Enter" button and press "STBD BOW UP or DOWN" button to change the value
- Press and hold "PORT BOW UP" for more than 2 seconds to exit program mode

Linear Devices Corporation

11126 Air Park Road, Suite G, Ashland, VA 23005

www.lectrotab.com, Ph 804-368-8428, Fax 804-368-8438

October 2018

LECTROTAB



Joystick LED Trim Tab Control



JLC-11

Lectrotab's Joystick LED control incorporates features requested by boat owners to provide a user-friendly control for a more enjoyable boating experience.

- Single "Joystick" control
- NMEA 2000 compatible
- LED display of each trim tab position

FEATURES

- Microprocessor based trim tab control with LED tab position indicators
- NMEA 2000 compatible with JLC-NMEA adapter
- Move both tabs up or down simultaneously with a single motion
- Dual station ready – just add a second JLC-11 and JR-* cable (sold separately)
- Automatic return to last tab position if ignition key is turned off and back on again
- Completely sealed, completely waterproof and will not deteriorate in sunlight
- Automatic tab retraction and calibration with key or accessory switch off
- Easy upgrade from any of our Lectrotab controls
- No external power module required
- LED tab position indicators dim automatically in darkness and brighten in sunlight
- Single or Dual Actuator per tab
- Operates on 12 or 24 volt dc systems

PRELIMINARY SPECIFICATIONS

Model Number	Display Color	Number of Stations/Actuators	Overall Width	Overall Height/Thickness	Mounting Hole Cutout (Diameter)	DC Voltage	Fuse Size Power Input (1 Actuator per Tab)	Fuse Size Aux.(MUST CONNECT)
JLC-11	Black	Single or Dual Station/ 1 or 2 Actuator/tab	3.0"/ 77mm	3.0"(77mm)/ 2.0"(50mm)	2.625"/66.7mm	12/24	12vdc = 15 or 20 amps 24vdc = 10amps	1 to 2 amp

Linear Devices Corporation

11126 Air Park Road, Suite G, Ashland, VA 23005

www.lectrotab.com, Ph 804-368-8428, Email: sales@lectrotab.com

August 2023






NMEA 2000 Connection to SLC One-Touch LED Control



SLC-NMEA
w/SR-3 cable



SLC-11 not included

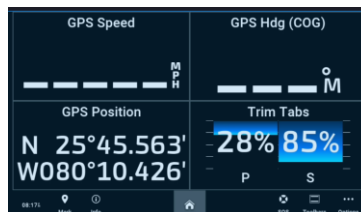

Displays trim tab positions on multifunction display



FEATURES



- SLC-NMEA adapter connects to all new or existing SLC-11 One-Touch LED controls
- SLC-NMEA adapter includes an SR-3 (3 foot, 1m) cable to connect to SLC-11
- Compatible with most MFD displays that include trim tab indicators
- For dual station SLC-11 systems, use SR-Y "Y" connector (order separately) (see diagram on back page)
- Operates on 12 or 24 volt dc systems
- Does not include the NMEA 2000 cable drop connecting the SLC-NMEA adapter to the NMEA 2000 backbone

SPECIFICATIONS

Model Number	Adaptor Color	Number of Stations/Actuators	Overall Length	Overall Height/Width	Mounting Hole to Hole Dimensions	DC Voltage	Parts Included	Parts not included
SLC-NMEA	Black	1 or 2 Stations/ 1 or 2 Actuators/tab	3.75"/ 95 mm	1.5"(38mm)/ 1.5"(38 mm)	3.4375" (87mm)	12/24	SLC-NMEA Adapter SR-3 cable	NMEA 2000 drop cable to connect to NMEA backbone

SLC-NMEA Connection to SLC-11 for Single or Dual Stations

"SLC-NMEA" Dual & Single Station Wiring

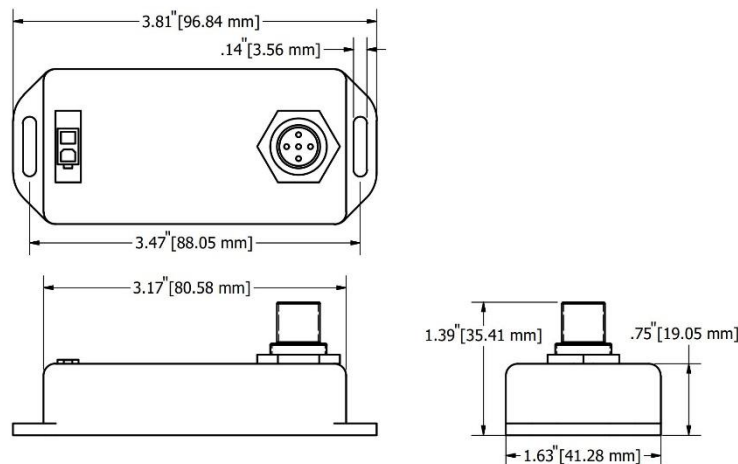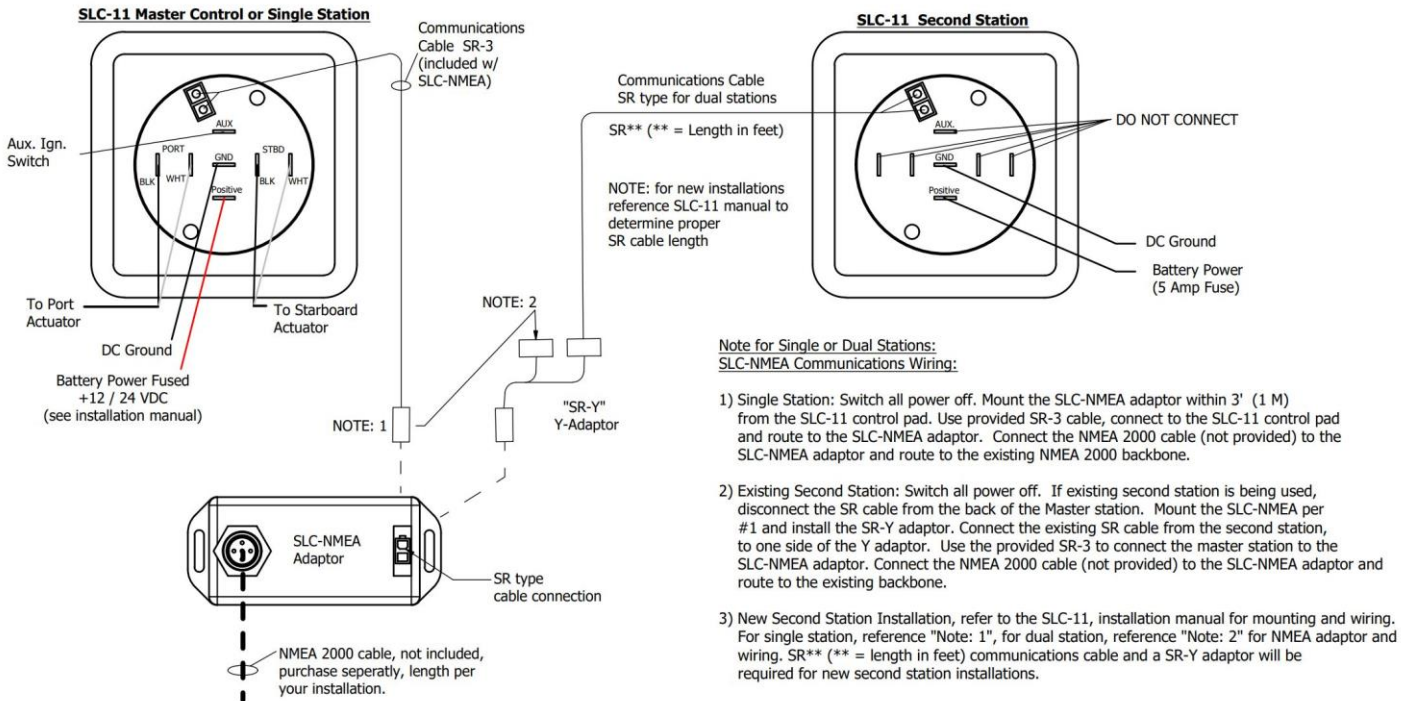

SLC-NMEA Dimensions

Automatic Leveling Control



As wind shifts, water conditions change or passengers move about, the Automatic Leveling Control (ALC) will automatically adjust your trim tabs to maintain a level boat for a more comfortable and enjoyable ride.

The ALC automatically corrects the roll from side to side and pitch from fore to aft to enhance your boating experience and improve your fuel economy.

FEATURES

- Microprocessor based automatic leveling trim tab control with LED tab position indicators
- Controls roll and pitch automatically
- Internal GPS - no GPS antenna or network required
- Automatically adapts to varying sea conditions
- Completely sealed and waterproof (IP68)
- UV protected - will not deteriorate in sunlight
- Prevents automatic corrections while turning
- Designed for planing and semi displacement hulls larger than 20ft
- Actuators connect directly to ALC-1 display panel (no external power module box required)
- Automatically dims LED tab position indicators in darkness and brightens in sunlight
- Automatically retracts trim tabs when boat is off plane or using optional key switch connection
- Dual station operation available (ALC-1D and ALC-2D does require external power module)
- Operates on 10 to 30 Volts DC
- 2 Year Warranty
- CE Approved (Compliance with EMC regulations)

SPECIFICATIONS

Model Number	Display Color	Number of Stations	Actuators per tab plate	Overall Width	Overall Height/ Thickness	Mounting Hole Cutout (Diameter)	DC Voltage	Fuse Size Power Input (1 Actuator per Tab)	Fuse Size Power Input (2 Actuators per Tab)
ALC-1	Black	1	1	3.15"/ 80mm	3.0"(77mm)/ 437"(11mm)	2"/50mm	12/24	12vdc = 15 amp 24vdc = 10amp	N/A
ALC-2D	Black	1 or 2	2	3.15"/ 80mm	3.0"(77mm)/ 437"(11mm)	2"/50mm	12/24	N/A	12vdc = 30amp 24vdc = 20amp
ALC-1D	Black	1 or 2	1	3.15"/ 80mm	3.0"(77mm)/ 437"(11mm)	2"/50mm	12/24	12vdc = 15 amp 24vdc = 10amp	N/A

Note: Second station keypad (ALC-2S) not included in ALC-2D and ALC-1D models.

LECTROTAB



Control Switches.....	pg.2
Stainless Steel Trim Tabs: Standard & Heavy Duty.....	pg.3
Aluminum Alloy Trim Tabs.....	pg.4
Trim Tabs: Heavy Duty & Dual Actuator.....	pg.5
Standard Actuators.....	pg.6
Short Actuators.....	pg.7
Heavy Duty Actuators.....	pg.8
Long Actuators.....	pg.9
Accessory Parts.....	pg.10
Control Accessory Parts.....	pg.11
Rocker Switch Accessory/Replacement Parts; Actuator Accessory Parts.....	pg.12
Lectrotab Apparel.....	pg.13



CONTROL SWITCHES



Lectrotab Part Number	Description
ALC-1	Automatic Leveling Control, controls roll and pitch for single station, single actuator/tab system
ALC-1D	Automatic Leveling Control, controls roll and pitch for single or dual stations (2 nd station keypad ALC-2S not included), single actuator/tab system
ALC-2D	Automatic Leveling Control, controls roll and pitch for single or dual stations, dual actuator/tab system (2 nd station keypad ALC-2S not included)
ALC-2S	2 nd Station Keypad for ALC-1D or ALC-2D
MLC-1	Manual Leveling Control, manually controls roll and pitch for single station, single actuator/tab system
SLC-NMEA	Adaptor to connect SLC-11 to NMEA 2000 backbone. Includes SR-3, 3'(1m) cable to connect adaptor to SLC-11. Does not include NMEA cable drop to backbone. Order one SR-Y for dual station SLC-11 to NMEA 2000 system.
SLC-11	Black Control Switch w/LED Tab Position Indicators and Auto Tab Retract (for single or dual stations and single or dual actuators/tab)
SAF-SC	Flat Rocker Switch (Single Station Applications) (SAB-S extended lever handle available)
SAF-NSC	Flat Rocker Switch (Dual Station Applications, 1 switch per station) (SAB-NS extended lever handle available)

STANDARD STAINLESS STEEL TRIM TABS



T12X12

Model Number	Stainless Steel Gauge	Tab Size (Chord X Width)	
		Inches	cm
T6x9	12	6X9	15X23
T9x9	12	9X9	23X23
T4x12	12	4x12	10X30
T6x12	12	6x12	15X30
T9X12	12	9X12	23X30
T9x18	12	9x18	23x46
T9x24	12	9x24	23x61
T9x30	12	9x30	23x76
T9x36	12	9x36	23x91
T12x9	12	12x9	30x23
T12x12	12	12x12	30x30
T12x18	12	12x18	30x46
T12x24	12	12x24	30x61
T12x30	12	12x30	30x76
T12x36	12	12x36	30x91
T12x42	12	12x42	30x107
T12x48	12	12x48	30x122

All tab plates listed above are priced with the standard finish. Mirror polished tabs are also available with the same part number as above with extension -0260 (T4X12-0260). Call factory for pricing.

HEAVY DUTY STAINLESS STEEL TRIM TABS



T12X12-9008

Model Number	Stainless Steel Gauge	Tab Size (Chord X Width)	
		Inches	cm
T6X12-3211 (30° taper)	12	6x12	15x30
T9X9-9008 Bent Up (-9051 Bent Down)	12	9x9	23x23
T9X12-9008 (-9051)	12	9x12	23x30
T9x18-9008 (-9051)	12	9x18	23x46
T9x24-9008	12	9x24	23x61
T12x9-9008 (-9051)	12	12x9	30x23
T12x12-9008 (-9051)	12	12x12	30x30
T12x18-9008	12	12x18	30x46
T12x24-9008	12	12x24	30x61

ALUMINUM ALLOY TRIM TABS



TA12X12

Model Number	Tab Size (Chord X Width)	
	Inches	cm
TA9X9	9x9	23x23
TA9X10	9x12	23x30
TA9X12	9x12	23x30
TA9X16	9x16	23x41
TA9X18	9x18	23x46
TA9X20	9x20	23x51
TA9X22	9x22	23x56
TA9X24	9x24	23x61
TA9X25	9x25	23x64
TA9X30	9x30	23x76
TA9X36	9x36	23x91
TA12X9	12x9	30x23
TA12X12	12x12	30x30
TA12X16	12x16	30x41
TA12X18	12x18	30x46
TA12X20	12x20	30x51
TA12X24	12x24	30x61
TA12X25	12x25	30x64
TA12X30	12x30	30x76
TA12X36	12x36	30x91
TA12X42	12x42	30x107
TA12X48	12x48	30x122

HEAVY DUTY TRIM TABS



TM20X14-8315



T20X14-8750



T20X14-9750



T16X12-9850
Mirror Finish



T20X14-8762-P
Mirror Finish
(-P Port, -S Stbd)

Tab Model Number	Steel Gauge	Tab Size		Actuator Specifications for Racing Tab			
		Inches	cm	Model Number	Quantity per Tab	Cable Length	Voltage
TM20X14-8315 (Black Powder Coated Finish)	11	20X14	51x36	A-BK-41	2	6'/1.8m	12vdc
				A-BK-42	2	23'/7m	12vdc
				B-BK-41	2	6'/1.8m	24vdc
				B-BK-42	2	23'/7m	24vdc

Tab Model Number	Stainless Steel Gauge	Tab Size		Actuator Specifications for Racing Tab			
		Inches	cm	Model Number	Quantity per Tab	Cable Length	Voltage
T20X14-8750 (Mirror Finish Stainless Steel)(Available in 19X14 and 18X14)	11	20X14	51x36	A-BK-45	2	6'/1.8m	12vdc
				A-BK-43	2	23'/7m	12vdc
				B-BK-45	2	6'/1.8m	24vdc
				B-BK-43	2	23'/7m	24vdc
T20X14-9750	11	20X14	51X36	Same as listed above for T20X14-8750			
T20X14-8762-P	11	20X14	51x36	Use same actuators as listed for T20X14-8750.			
T20X14-8762-S	11	20X14	51x36	Use same actuators as listed for T20X14-8750.			
T16X12-9850	11	16X12	41X30	Same actuators as above except one actuator per tab.			

DUAL ACTUATOR TRIM TABS



T12X32-1306

Model Number	Stainless Steel (Gauge)	Tab Size (Chord X Width)	
		Inches	cm
T12X24-1306	12	12x24	30x61
T12X30-1306	12	12x30	30x76
T12X32-1306	12	12X32	30X81
T12X36-1306	12	12x36	30x91
T12X42-1306	12	12x42	30x107
T12X48-1306	12	12x48	30x122

STANDARD ACTUATORS



A-BK

Model	DC Voltage	Stroke Length	Stroke Speed	Distance from Bolt to Pin	Cable Length (Feet/Meter)	Upper Mounting Bracket	Lower Mounting Bracket
A	12VDC	2.25"/57mm	8 sec.	11.5"/292mm	6'/1.8m	None	None
A-BK	12VDC	2.25"/57mm	8 sec.	11.5"/292mm	6'/1.8m	Standard	Standard
A-BK-13	12VDC	2.25"/57mm	8 sec.	11.5"/292mm	23'/7m	Standard	Standard
A-BK-24	12VDC	2.25"/57mm	8 sec.	11.5"/292mm	28'/8.5m	Standard	Standard
A-BK-25	12VDC	2.25"/57mm	8 sec.	11.5"/292mm	6'/1.8m	Low Profile	Standard
A-BK-16	12VDC	2.25"/57mm	8 sec.	11.5"/292mm	23'/7m	Low Profile	Standard
A-BK-51 (Replaces Bennett 4-ring)	12VDC	2.25"/57mm	8 sec.	11.5"/292mm	6'/1.8m	Standard (Inner holes match Bennett)	Matches Bennett
B	24VDC	2.25"/57mm	8 sec.	11.5"/292mm	6'/1.8m	None	None
B-BK	24VDC	2.25"/57mm	8 sec.	11.5"/292mm	6'/1.8m	Standard	Standard
B-BK-13	24VDC	2.25"/57mm	8 sec.	11.5"/292mm	23'/7m	Standard	Standard
B-BK-24	24VDC	2.25"/57mm	8 sec.	11.5"/292mm	28'/8.5m	Standard	Standard
B-BK-25	24VDC	2.25"/57mm	8 sec.	11.5"/292mm	6'/1.8m	Low Profile	Standard
B-BK-16	24VDC	2.25"/57mm	8 sec.	11.5"/292mm	23'/7m	Low Profile	Standard

SHORT ACTUATORS



S-BK-25

Model	DC Voltage	Stroke Length	Stroke Time	Distance from Bolt to Pin	Cable Length (Feet/Meter)	Upper Mounting Bracket	Lower Mounting Bracket
S	12VDC	1.5"/38mm	6 sec.	10"/254mm	6'/1.8m	None	None
S-BK	12VDC	1.5"/38mm	6 sec.	10"/254mm	6'/1.8m	Standard	Standard
S-BK-13	12VDC	1.5"/38mm	6 sec.	10"/254mm	23'/7m	Standard	Standard
S-BK-24	12VDC	1.5"/38mm	6 sec.	10"/254mm	28'/8.5m	Standard	Standard
S-BK-25	12VDC	1.5"/38mm	6 sec.	10"/254mm	6'/1.8m	Low Profile	Standard
S-BK-16	12VDC	1.5"/38mm	6 sec.	10"/254mm	23'/7m	Low Profile	Standard
SB	24VDC	1.5"/38mm	6 sec.	10"/254mm	6'/1.8m	None	None
SB-BK	24VDC	1.5"/38mm	6 sec.	10"/254mm	6'/1.8m	Standard	Standard
SB-BK-13	24VDC	1.5"/38mm	6 sec.	10"/254mm	23'/7m	Standard	Standard
SB-BK-20	24VDC	1.5"/38mm	6 sec.	10"/254mm	6'/1.8m	Stainless Steel HD	Standard
SB-BK-24	24VDC	1.5"/38mm	6 sec.	10"/254mm	28'/8.5m	Standard	Standard
SB-BK-29	24VDC	1.5"/38mm	6 sec.	10"/254mm	23'/7m	Stainless Steel HD	Standard
SB-BK-25	24VDC	1.5"/38mm	6 sec.	10"/254mm	6'/1.8m	Low Profile	Standard
SB-BK-16	24VDC	1.5"/38mm	6 sec.	10"/254mm	23'/7m	Low Profile	Standard

HEAVY DUTY ACTUATORS



A-BK-20

Model	DC Voltage	Stroke Length	Stroke Time	Distance from Bolt to Pin	Cable Length (Feet/Meter)	Upper Mounting Bracket	Lower Mounting Bracket	Use Actuator with Tabs
A-BK-20	12VDC	2.25"/57mm	8 sec.	11.5"/292mm	6'/1.8m	Stainless Steel, 12 ga.	Standard	All Tabs
A-BK-29	12VDC	2.25"/57mm	8 sec.	11.5"/292mm	23'/7m	Stainless Steel, 12 ga.	Standard	All Tabs
A-BK-41	12VDC	2.25"/57mm	8 sec.	11.5"/292mm	6'/1.8m	Bolt, Nut & Washer	Bolt, Nut & Washer	TM20X14-8315
A-BK-42	12VDC	2.25"/57mm	8 sec.	11.5"/292mm	23'/7m	Bolt, Nut & Washer	Bolt, Nut & Washer	TM20X14-8315
A-BK-43	12VDC	2.25"/57mm	8 sec.	11.5"/292mm	23'/7m	Bolt, Nut & Washer	Bolt, Nut, Spacer & Washer	T20X14-8750
A-BK-45	12VDC	2.25"/57mm	8 sec.	11.5"/292mm	6'/1.8m	Bolt, Nut & Washer	Bolt, Nut, Spacer & Washer	T20X14-8750
B-BK-20	24VDC	2.25"/57mm	8 sec.	11.5"/292mm	6'/1.8m	Stainless Steel, 12 ga.	Standard	All Tabs
B-BK-29	24VDC	2.25"/57mm	8 sec.	11.5"/292mm	23'/7m	Stainless Steel, 12 ga.	Standard	All Tabs
B-BK-41	24VDC	2.25"/57mm	8 sec.	11.5"/292mm	6'/1.8m	Bolt, Nut & Washer	Bolt, Nut & Washer	TM20X14-8315
B-BK-42	24VDC	2.25"/57mm	8 sec.	11.5"/292mm	23'/7m	Bolt, Nut & Washer	Bolt, Nut & Washer	TM20X14-8315
B-BK-43	24VDC	2.25"/57mm	8 sec.	11.5"/292mm	23'/7m	Bolt, Nut & Washer	Bolt, Nut, Spacer & Washer	T20X14-8750
B-BK-45	24VDC	2.25"/57mm	8 sec.	11.5"/292mm	6'/1.8m	Bolt, Nut & Washer	Bolt, Nut, Spacer & Washer	T20X14-8750

LONG ACTUATORS 4" (102mm)



L-BK

Model	DC Voltage	Stroke Length	Stroke Speed	Distance from Bolt to Pin	Cable Length (Feet/Meter)	Upper Mounting Bracket	Lower Mounting Bracket
L	12VDC	4" / 102mm	7 sec.	14.86"/377m	6'/1.8m	None	None
L-BK	12VDC	4" / 102mm	7 sec.	14.86"/377m	6'/1.8m	Standard	Standard
L-BK-13	12VDC	4" / 102mm	7 sec.	14.86"/377m	23'/7m	Standard	Standard
L-BK-24	12VDC	4" / 102mm	7 sec.	14.86"/377m	28'/8.5m	Standard	Standard
L-BK-25	12VDC	4" / 102mm	7 sec.	14.86"/377m	6'/1.8m	Low Profile	Standard
L-BK-16	12VDC	4" / 102mm	7 sec.	14.86"/377m	23'/7m	Low Profile	Standard
LB	24VDC	4" / 102mm	7 sec.	14.86"/377m	6'/1.8m	None	None
LB-BK	24VDC	4" / 102mm	7 sec.	14.86"/377m	6'/1.8m	Standard	Standard
LB-BK-13	24VDC	4" / 102mm	7 sec.	14.86"/377m	23'/7m	Standard	Standard
LB-BK-24	24VDC	4" / 102mm	7 sec.	14.86"/377m	28'/8.5m	Standard	Standard
LB-BK-25	24VDC	4" / 102mm	7 sec.	14.86"/377m	6'/1.8m	Low Profile	Standard
LB-BK-16	24VDC	4" / 102mm	7 sec.	14.86"/377m	23'/7m	Low Profile	Standard

ACCESSORY PARTS



W4-20 Cable

Model Number	Description	Application
W4	4 - Conductor Cable, 14 Gauge Wire (Per Foot)	4-Conductor Cable to Connect all Actuators with 6' (1.8m) to Oval or Rocker Control Switch
W4-20	4 - Conductor Cable, 14 Gauge Wire 20' (6.1m)	4-Conductor Cable to Connect all Actuators with 6' (1.8m) to Oval or Rocker Control Switch
W4-30	4 - Conductor Cable, 14 Gauge Wire 30' (9.1m)	4-Conductor Cable to Connect all Actuators with 6' (1.8m) to Oval or Rocker Control Switch
W4-40	4 - Conductor Cable, 14 Gauge Wire 40' (12.2m)	4-Conductor Cable to Connect all Actuators with 6' (1.8m) to Oval or Rocker Control Switch
W4-50	4 - Conductor Cable, 14 Gauge Wire 50' (15.2m)	4-Conductor Cable to Connect all Actuators with 6' (1.8m) to Oval or Rocker Control Switch
W4-60	4 - Conductor Cable, 14 Gauge Wire 60' (18.3m)	4-Conductor Cable to Connect all Actuators with 6' (1.8m) to Oval or Rocker Control Switch



HK Hardware Kit

HK	Hardware Kit Contains Fork Terminals, Terminal Strip and Actuator Upper Bracket Mounting Screws (2 Actuator and 2 Tab Kit)	Terminal Strip and Fork Terminals Connect 6' (1.8m) Actuator Cable to W4, 4-Conductor Cable. 6 Screws Connect Upper Actuator Bracket to Boat Transom
HK-4	↓	↓
HK-6	↓	↓
HXKAF-9-12 (Rocker Sw.)	Screws to mount tab plates and actuators. 20 and 2amp fuses and in-line fuse holders for Oval. Connecting terminals. (For XKA** type kits with 12"X12" tab plates or smaller)	Screws to mount tab plates and actuators. 20 and 2amp fuses and in-line fuse holders for Oval sw. Connecting terminals. (For XKA** type kits with 12"X12" tab plates or smaller)
HXKASB-9-12 (Oval Sw.)	↓	↓
HXKAF-18-24 (Rocker Sw.)	Screws to mount tab plates and actuators. 20 and 2amp fuses and in-line fuse holders for Oval. Connecting terminals. (For XKA** type kits with 18" and 24" wide tab plates)	Screws to mount tab plates and actuators. 20 and 2amp fuses and in-line fuse holders for Oval sw. Connecting terminals. (For XKA** type kits with 18" and 24" wide tab plates)
HXKASB-18-24 (Oval Sw.)	↓	↓
ZR275	Zinc anode, 2 13/16" (71.4 mm) diameter x .575" (14.6mm) thick (includes mounting bolt and nut)	Attaches to top side of tab with .3125" (10mm) diameter Hole. (Included on all tabs that end in -Z)
F612	Stainless Steel Screws #14 X 1 1/4" Pan Head (6.4mm X 32mm)	Stainless steel screws for mounting actuator upper bracket and trim tab plate to transom.



ZR275 Zinc

CONTROL ACCESSORY PARTS

	Model Number	Description	Application
 SR Cable	SR	SR Communication Cable for Multiple Station SLC-11 "One Touch" Controls	Use 1 SR Cable per SLC Control or see longer length SR cables below to connect directly to each control.
	SR-Y	SR "Y" connection for dual station SLC-11 to NMEA 2000 system	Connects two SLC-11 displays to one SLC-NMEA to connect to NMEA 2000 system
 SR-3	SR-3	SR Communication Cable for Dual Station SLC-11 "One Touch" Controls	Use 1 SR-** (**=cable length) Cable per two SLC-11 controls. Cable has both white plugs installed.
	SR-10		
	SR-15		
	SR-20		
	SR-25		
	SR-30		
	SR-40		
	SR-40		
 Fuse Holder	E600	Fuse Holder, In line 12 gauge, 30 amp, 32Volt (Fuses sold separately)	In line fuse holder connected to incoming +12vdc or +24vdc going to control switch and AUX terminal on SLC-11 control (see wiring diagrams)
	E602	2 Amp, 32V Fuse connects to E600 fuse holder.	Connect this 2 amp fuse to incoming +12vdc or +24vdc to SETR-61 AUX terminal
 In line fuses	E610	10 Amp, 32V Fuse connects to E600 fuse holder.	See control switch wiring diagrams or product specification sheets at www.lectrotab.com for fuse sizing details.
	E615	15 Amp, 32V Fuse connects to E600 fuse holder.	See control switch wiring diagrams or product specification sheets at www.lectrotab.com for fuse sizing details.
	E620	20 Amp, 32V Fuse connects to E600 fuse holder.	See control switch wiring diagrams or product specification sheets at www.lectrotab.com for fuse sizing details.
	E625	25 Amp, 32V Fuse connects to E600 fuse holder.	See control switch wiring diagrams or product specification sheets at www.lectrotab.com for fuse sizing details.
	E630	30 Amp, 32V Fuse connects to E600 fuse holder.	See control switch wiring diagrams or product specification sheets at www.lectrotab.com for fuse sizing details.
	E630	30 Amp, 32V Fuse connects to E600 fuse holder.	See control switch wiring diagrams or product specification sheets at www.lectrotab.com for fuse sizing details.
 E406	E406	Locking Fork Terminal 14/16 awg	Included in HK hardware kit connecting interconnect W4 cable to actuators and wireless module
 E407	E407	Butt connector 14/16 awg	Connects to inline fuse holder E600 wires
 E414	E414	Push-on connector 14/16 awg .25"X.032"	Connects to Oval SETR-61 and SAF series control switches

ROCKER SWITCH ACCESSORY/REPLACEMENT PARTS



SF-SC or SF-NSC



SF-S, SF-NS
Discontinued



SB-S
SB-NS

Model Number	Description	Application
SF-SC	Individual Flat Rocker Switch for SAF-SC (Single Station Only)	Individual Replacement Switch for SAF-SC Rocker Switch Assembly
SF-S	No longer available. Must use complete SAF-SC as replacement.	No longer available. Must use complete SAF-SC as replacement.
SF-NSC	Individual Flat Rocker Switch for SAF-NSC (Dual Station)	Individual Replacement Switch for SAF-NSC Rocker Switch Assembly
SF-NS	No longer available. Must use complete SAF-NSC as replacement.	No longer available. Must use complete SAF-NSC as replacement.
SB-S	Individual Bat Handle Rocker Switch for SAB-S (Single Station Only)	Individual Replacement Switch for SAB-S Rocker Switch Assembly
SB-NS	Individual Bat Handle Rocker switch for SAB-NS (Dual Station)	Individual Replacement Switch for SAB-NS Rocker Switch Assembly

ACTUATOR ACCESSORY PARTS



BL Lower Bracket



BU Upper Bracket



BU-2 SS Heavy Duty Upper Bracket



BU-3 SS Upper Bracket



BU-5 Low Profile Upper Bracket

Model Number	Description	Application
BL	Actuator Lower Bracket w/Pin	Attaches to Lower Ram on Actuator with Pin
BU	Actuator Upper Bracket	Attaches to Actuator Upper Cover Boss with Bolt
BU-2	Heavy Duty Stainless Steel Upper Bracket (for heavy duty actuators)	Attaches to Heavy Duty Actuator Upper Cover Boss with Bolt
BU-3	Stainless Steel Upper Bracket (for standard actuators)	Attaches to Standard Actuator Upper Cover Boss with Bolt
BU-5	Low Profile Actuator Upper Bracket	Attaches to Actuator Upper Cover Boss with Bolt

Lectrotab Hats



Model Number	Description
LHC	Lectrotab Hat Charcoal (one size fits all)
LHS	Lectrotab Hat Stone (one size fits all)
LHK	Lectrotab Hat Khaki (one size fits all)

Lectrotab Tee Shirts



Model Number	Description
LSM	Lectrotab Tee Shirt Medium (M)
LSL	Lectrotab Tee Shirt Large (L)
LSXL	Lectrotab Tee Shirt Extra-Large (XL)
LSXXXL	Lectrotab Tee Shirt (XXXL)



Table of Contents for Lectrotab 2022 Kit

Effective: December 1, 2022

List Pricing XKA Style Kits:

XKA Kit w/SS Tabs, A-BK-13 Actuators w/23' (7m) cable, SAF-SC, SLC-11, MLC-1 or ALC-1.....	pg.2-3
XKA Kit w/Aluminum Tabs, A-BK-13 Actuators w/23' (7m) cable, SAF-SC, SLC-11, MLC-1 or ALC-1.....	pg.4-5
XKA Kit w/SS Tabs, A-BK-13 Actuators w/23' (7m) cable and Control Switch Not Included.....	pg.6
XKA Kit w/Aluminum Tabs, A-BK-13 Actuators w/23' (7m) cable and Control Switch Not Included.....	pg.7
XKA Kit, Tabs Not Included, A-BK-13 Actuators w/23' (7m) cable, SAF-SC, SLC-11, MLC-1 or ALC-1.....	pg.8-9

List Pricing KA Style Kits:

KA Kit w/SS Tabs, A-BK Actuators w/6' (1.8m) cable, 20' (6.1m) Cable, Hardware kit, SAF-SC, SLC-11, MLC-1 or ALC-1.....	pg.10-11
KA Kit w/Alum. Tabs, A-BK Actuators w/6' (1.8m) cable, 20' (6.1m) Cable, Hardware kit, SAF-SC, SLC-11, MLC-1 or ALC-1.....	pg.12-13
KA Kit w/SS Tabs, A-BK Actuators w/6' (1.8m) cable, 20' (6.1m) Cable, Hardware Kit and Control Switch Not Included...	pg.14

Bennett Refit Kits:

Lectrotab kits for Bennett Refit.....	pg.15-16
---------------------------------------	----------

ROW1



XKA Stainless Steel Trim Tab Kits w/Control Switch

Lectrotab Kit with Rocker Switch		Lectrotab Kit with SLC1	Kit Contents
			2 – Actuators with 23' (7m) cable 2 – Flat Stainless Steel Tabs, 12 Gauge  1 – Control Switch 
XKAF6X9		XKASL6X9	
XKAF9X9		XKASL9X9	
XKAF4X12		XKASL4X12	
XKAF9X12		XKASL9X12	
XKAF9X18		XKASL9X18	
XKAF9X24		XKASL9X24	
XKAF9X30		XKASL9X30	
XKAF9X36		XKASL9X36	
XKAF12X9		XKASL12X9	
XKAF12X12		XKASL12X12	
XKAF12X18		XKASL12X18	
XKAF12X24		XKASL12X24	
XKAF12X30		XKASL12X30	
XKAF12X36		XKASL12X36	
XKAF12X42		XKASL12X42	
XKAF12X48		XKASL12X48	

Stainless Steel Trim Tab Kit Model Number

<u>XK</u>	<u>A</u>	<u>SL</u>	<u>12</u>	X	<u>12</u>
XK = 23' (7m) Actuator Cable K = 6' (1.8m) Actuator Cable	A = Standard Actuator 12vdc, 2.25" (57mm) stroke, 8 second stroke time (Priced Above) B = Standard Actuator 24vdc, 2.25" (57mm) stroke, 8 second stroke time (ADD \$32/Kit to price above) S = Short Actuator 12vdc, 1.5" (38mm) stroke, 6 second stroke time (ADD \$32/Kit to price above)	SLC = SLC-11 Black LED Control F = Flat Rocker Switch SML = MLC-1 Manual Level Control SAL = ALC-1 Auto Level Control	1st Number = Tab Chord Length (inches)		2nd Number = Tab Width Across Transom (inches)

XKA Stainless Steel Trim Tab Kits w/Control Switch

Lectrotab Kit with MLC-1		Lectrotab Kit with ALC-1	Kit Contents
			
XKASML6X9		XKASAL6X9	2 – Actuators with 23' (7m) cable 2 – Flat Stainless Steel Tabs, 12 Gauge 
XKASML9X9		XKASAL9X9	
XKASML4X12		XKASAL4X12	
XKASML9X12		XKASAL9X12	
XKASML9X18		XKASAL9X18	
XKASML9X24		XKASAL9X24	
XKASML9X30		XKASAL9X30	
XKASML9X36		XKASAL9X36	
XKASML12X9		XKASAL12X9	
XKASML12X12		XKASAL12X12	
XKASML12X18		XKASAL12X18	
XKASML12X24		XKASAL12X24	
XKASML12X30		XKASAL12X30	
XKASML12X36		XKASAL12X36	
XKASML12X42		XKASAL12X42	
XKASML12X48		XKASAL12X48	
			1 – Control Switch 

Stainless Steel Trim Tab Kit Model Number

<u>XK</u>	<u>A</u>	<u>SL</u>	<u>12</u>	X	<u>12</u>
XK = 23' (7m) Actuator Cable K = 6' (1.8m) Actuator Cable A = Standard Actuator 12vdc, 2.25" (57mm) stroke, 8 second stroke time B = Standard Actuator 24vdc, 2.25" (57mm) stroke, 8 second stroke time S = Short Actuator 12vdc, 1.5" (38mm) stroke, 6 second stroke time		SL = SLC-11 Black LED Control F = Flat Rocker Switch SML = MLC-1 Manual Level Control SAL = ALC-1 Auto Level Control			2nd Number = Tab Width Across Transom (inches) 1st Number = Tab Chord Length (inches)

XKA Aluminum Alloy Trim Tab Kits w/Control Switch

Lectrotab Kit with Rocker Switch		Lectrotab Kit with SLC-11	Kit Contents
			2 – Actuators with 23' (7m) cable 2 – Aluminum Alloy Tabs  1 – Control Switch 
XKAF9X9A		XKASL9X9A	
XKAF9X12A		XKASL9X12A	
XKAF9X18A		XKAS9X18A	
XKAF9X24A		XKASL9X24A	
XKAF9X30A		XKASL9X30A	
XKAF9X36A		XKASL9X36A	
XKAF12X9A		XKASL12X9A	
XKAF12X12A		XKASL12X12A	
XKAF12X18A		XKASL12X18A	
XKAF12X24A		XKASL12X24A	
XKAF12X30A		XKASL12X30A	
XKAF12X36A		XKASL12X36A	
XKAF12X42A		XKASL12X42A	

Aluminum Alloy Trim Tab Kit Model Number

<u>XK</u>	<u>A</u>	<u>SL</u>	<u>12</u>	<u>X</u>	<u>12</u>	<u>A</u>
XK = 23' (7m) Actuator Cable K = 6' (1.8m) Actuator Cable	A = Standard Actuator 12vdc, 2.25" (57mm) stroke, 8 second stroke time B = Standard Actuator 24vdc, 2.25" (57mm) stroke, 8 second stroke time S = Short Actuator 12vdc, 1.5" (38mm) stroke, 6 second stroke time	SL = SLC-11 Black LED Control F = Flat Rocker Switch SML = MLC-1 Manual Level Control SAL = ALC-1 Auto Level Control	1st Number = Tab Chord Length (inches)		2nd Number = Tab Width Across Transom (inches)	A=Aluminum Alloy Tab

XKA Aluminum Alloy Trim Tab Kits w/Control Switch

Lectrotab Kit with MLC-1		Lectrotab Kit with ALC-1	Kit Contents
			2 – Actuators with 23' (7m) cable 2 – Aluminum Alloy Tabs   1 – Control Switch  
XKASML9X9A		XKASAL9X9A	
XKASML9X12A		XKASAL9X12A	
XKASML9X18A		XKASAL9X18A	
XKASML9X24A		XKASAL9X24A	
XKASML9X30A		XKASAL9X30A	
XKASML9X36A		XKASAL9X36A	
XKASML12X9A		XKASAL12X9A	
XKASML12X12A		XKASAL12X12A	
XKASML12X18A		XKASAL12X18A	
XKASML12X24A		XKASAL12X24A	
XKASML12X30A		XKASAL12X30A	
XKASML12X36A		XKASAL12X36A	
XKASML12X42A		XKASAL12X42A	

Aluminum Alloy Trim Tab Kit Model Number

<u>XK</u>	<u>A</u>	<u>SL</u>	<u>12</u> <u>X</u> <u>12</u>	<u>A</u>
XK = 23' (7m) Actuator Cable K = 6' (1.8m) Actuator Cable		SL = SLC-11 Black LED Control F = Flat Rocker Switch SML = MLC-1 Manual Level Control SAL = ALC-1 Auto Level Control	2nd Number = Tab Width Across Transom (inches) 1st Number = Tab Chord Length (inches)	A=Aluminum Alloy Tab
A = Standard Actuator 12vdc, 2.25" (57mm) stroke, 8 second stroke time B = Standard Actuator 24vdc, 2.25" (57mm) stroke, 8 second stroke time S = Short Actuator 12vdc, 1.5" (38mm) stroke, 6 second stroke time				

XKA Stainless Steel Trim Tab Kits (Control Switch Not Included)

Lectrotab Kit Number	Kit Contains these Parts
XKA9X9	2 – Actuators with 23' (7m) cable 2 – Flat Stainless Steel Tabs, 12 Gauge 
XKA9X12	
XKA9X18	
XKA9X24	
XKA9X30	
XKA9X36	
XKA12X9	
XKA12X12	
XKA12X18	
XKA12X24	
XKA12X30	
XKA12X36	
XKA12X42	

Stainless Steel Trim Tab Kit Model Number

<u>XK</u>	<u>A</u>	<u> </u>	<u>12</u>	X	<u>12</u>
XK = 23'(7m) Actuator Cable K = 6'(1.8m) Actuator Cable	A = Standard Actuator 12vdc, 2.25" (57mm) stroke, 8 second stroke time B = Standard Actuator 24vdc, 2.25" (57mm) stroke, 8 second stroke time S = Short Actuator 12vdc, 1.5" (38mm) stroke, 6 second stroke time	No Designation = Control Not Included	1st Number = Tab Chord Length (inches)		2nd Number = Tab Width Across Transom (inches)

XKA Aluminum Alloy Trim Tab Kits (Control Switch Not Included)

Kit Model Number (No Switch)	Kit Contains these Parts
XKA9X9A	2 – Actuators with 23' (7m) cable (A-BK-13 = 12vdc, B-BK-13 = 24vdc)
XKA9X12A	
XKA9X16A	2 –Marine Grade Aluminum Alloy Tabs
XKA9X18A	
XKA9X20A	
XKA9X22A	
XKA9X24A	
XKA9X25A	
XKA9X30A	
XKA9X36A	
XKA12X9A	
XKA12X12A	
XKA12X16A	
XKA12X18A	
XKA12X20A	
XKA12X24A	
XKA12X25A	
XKA12X30A	
XKA12X36A	
XKA12X42A	

Aluminum Alloy Trim Tab Kit Model Number

XK	A		12	X	12	A
XK = 23' (7m) Actuator Cable K = 6' (1.8m) Actuator Cable		No Designation = No Control Switch Included			2nd Number = Tab Width Across Transom (inches)	
	A = Standard Actuator (A-BK-13) 12vdc, 2.25" (57mm) stroke, 8 second stroke time B = Standard Actuator (B-BK-13) 24vdc, 2.25" (57mm) stroke, 8 second stroke time S = Short Actuator 12vdc, 1.5" (38mm) stroke, 6 second stroke time		1st Number = Tab Chord Length (inches)			A = Aluminum Alloy Tabs

XKA Trim Tab Kits w/Control Switch (Trim Tabs Not Included)

Lectrotab Kit with Rocker Switch		Lectrotab Kit with SLC-11
		
XKAF		XKASL
		XKSSL
		KSSL
KAF		KASL

XKA Kit Contain these Parts		KA Kit Contain these Parts
2 – Actuators with 23’ (7m) cable 	1 – Control Switch Rocker Switch  MLC-1 Manual Level Sw.  SLC-11 Control  ALC-1 Auto Level Sw. 	2 – Actuators with 6’ (1.8m) cable 1 – 20’ (6.1m) Cable  1 – Hardware Kit 

Trim Tab Kit Model Number (Trim Tabs Not Included)

<u>XK</u>	<u>A</u>	<u>SL</u>	
XK = 23’(7m) Actuator Cable K = 6’(1.8m) Actuator Cable		SL = SLC-11 Black LED Control F = Flat Rocker Switch SML = MLC-1 Manual Level Control SAL = ALC-1 Auto Level Control	
A = Standard Actuator 12vdc, 2.25” (57mm) stroke, 8 second stroke time B = Standard Actuator 24vdc, 2.25” (57mm) stroke, 8 second stroke time S = Short Actuator 12vdc, 1.5” (38mm) stroke, 6 second stroke time			Blank = No Tabs Included

XKA Trim Tab Kits w/Control Switch (Trim Tabs Not Included)

Lectrotab Kit with MLC-1		Lectrotab Kit with ALC-1	
			
XKASML		XKASAL	
KASML		KASAL	

XKA Kit Contain these Parts	1 – Control Switch	KA Kit Contain these Parts
2 – Actuators with 23' (7m) cable	 Rocker Switch  SLC-11 Control	 2 – Actuators with 6' (1.8m) cable  1 – 20' (6.1m) Cable  1 – Hardware Kit
	 MLC-1 Manual Level Sw.  ALC-1 Auto Level Sw.	

Trim Tab Kit Model Number (Trim Tabs Not Included)

<u>XK</u>	<u>A</u>	<u>SL</u>	
XK = 23'(7m) Actuator Cable K = 6'(1.8m) Actuator Cable		SL = SLC-11 Black LED Control F = Flat Rocker Switch SML = MLC-1 Manual Level Control SAL = ALC-1 Auto Level Control	
	A = Standard Actuator 12vdc, 2.25" (57mm) stroke, 8 second stroke time B = Standard Actuator 24vdc, 2.25" (57mm) stroke, 8 second stroke time S = Short Actuator 12vdc, 1.5" (38mm) stroke, 6 second stroke time		Blank = No Tabs Included

KA Stainless Steel Trim Tab Kits w/Control Switch

Lectrotab Kit with Rocker Switch		Lectrotab Kit with SLC-11	Kit Contents
			2 – Actuators with 6' (1.8m) cable 2 – Stainless Steel Tabs
KAF9X9		KASL9X9	
KAF9X12		KASL9X12	
KAF9X18		KASL9X18	
KAF9X24		KASL9X24	
KAF9X30		KASL9X30	1 – 4-Conductor Cable 20' (6.1m) 1 – Hardware Kit
KAF9X36		KASL9X36	
KAF12X9		KASL12X9	
KAF12X12		KASL12X12	
KAF12X18		KASL12X18	1 – Control Switch    
KAF12X24		KASL12X24	
KAF12X30		KASL12X30	
KAF12X36		KASL12X36	
KAF12X42		KASL12X42	

KA Stainless Steel Trim Tab Kit Model Number

K

K = 6' (1.8m) Actuator Cable with 20' (6.1m) wire bundle and hardware kit

A

A = Standard Actuator 12vdc, 2.25" (57mm) stroke, 8 second stroke time

B = Standard Actuator 24vdc, 2.25" (57mm) stroke, 8 second stroke time

S = Short Actuator 12vdc, 1.5" (38mm stroke, 6 second stroke time

SL

SL = SLC-11 Black LED Control
F = Flat Rocker Switch
SML = MLC-1 Manual Level Control
SAL = ALC-1 Auto Level Control

12

X

12

2nd Number = Tab Width Across Transom (inches)

1st Number = Tab Chord Length (inches)

KA Stainless Steel Trim Tab Kits w/Control Switch

Lectrotab Kit with MLC-1		Lectrotab Kit with ALC-1	Kit Contents
			2 – Actuators with 6' (1.8m) cable 2 – Stainless Steel Tabs
KASML9X9		KASAL9X9	
KASML9X12		KASAL9X12	
KASML9X18		KASAL9X18	
KASML9X24		KASAL9X24	
KASML9X30		KASAL9X30	
KASML9X36		KASAL9X36	1 – 4-Conductor Cable 20' (6.1m)
KASML12X9		KASAL12X9	1 – Hardware Kit
KASML12X12		KASAL12X12	
KASML12X18		KASAL12X18	
KASML12X24		KASAL12X24	1 – Control Switch
KASML12X30		KASAL12X30	
KASML12X36		KASAL12X36	
KASML12X42		KASAL12X42	

KA Stainless Steel Trim Tab Kit Model Number

<u>K</u>	<u>A</u>	<u>SL</u>	<u>12</u>	<u>X</u>	<u>12</u>
K = 6' (1.8m) Actuator Cable with 20' (6.1m) wire bundle and hardware kit	A = Standard Actuator 12vdc, 2.25" (57mm) stroke, 8 second stroke time B = Standard Actuator 24vdc, 2.25" (57mm) stroke, 8 second stroke time S = Short Actuator 12vdc, 1.5" (38mm) stroke, 6 second stroke time	SL = SLC-11 Black LED Control F = Flat Rocker Switch SML = MLC-1 Manual Level Control SAL = ALC-1 Auto Level Control	1st Number = Tab Chord Length (inches)		2nd Number = Tab Width Across Transom (inches)

KA Aluminum Alloy Trim Tab Kits w/Control Switch

Lectrotab Kit with Rocker Switch		Lectrotab Kit with SLC-11	Kit Contents
			2 – Actuators with 6' (1.8m) cable
KAF9X9A		KASL9X9A	
KAF9X12A		KASL9X12A	
KAF9X18A		KASL9X18A	2 – Aluminum Alloy Tabs
KAF9X24A		KASL9X24A	
KAF9X30A		KASL9X30A	
KAF9X36A		KASL9X36A	1 – 4-Conductor Cable 20' (6.1m)
KAF12X9A		KASL12X9A	1 – Hardware Kit
KAF12X12A		KASL12X12A	
KAF12X18A		KASL12X18A	1 – Control Switch
KAF12X24A		KASL12X24A	
KAF12X30A		KASL12X30A	
KAF12X36A		KASL12X36A	
KAF12X42A		KASL12X42A	

KA Aluminum Alloy Trim Tab Kit Model Number

<u>K</u>	<u>A</u>	<u>SL</u>	<u>12</u>	<u>X</u>	<u>12</u>	<u>A</u>
K = 6' (1.8m) Actuator Cable with 20' (6.1m) wire bundle and hardware kit	A = Standard Actuator 12vdc, 2.25" (57mm) stroke, 8 second stroke time B = Standard Actuator 24vdc, 2.25" (57mm) stroke, 8 second stroke time S = Short Actuator 12vdc, 1.5" (38mm) stroke, 6 second stroke time	SL = SLC-11 Black LED Control F = Flat Rocker Switch SML = MLC-1 Manual Level Control SAL = ALC-1 Auto Level Control	1st Number = Tab Chord Length (inches)		2nd Number = Tab Width Across Transom (inches)	A=Aluminum Alloy Tab

KA Aluminum Alloy Trim Tab Kits w/Control Switch

Lectrotab Kit with MLC-1		Lectrotab Kit with ALC-1	Kit Contents
			2 – Actuators with 6’ (1.8m) cable
KASML9X9A		KASAL9X9A	
KASML9X12A		KASAL9X12A	2 – Aluminum Alloy Tabs
KASML9X18A		KASAL9X18A	
KASML9X24A		KASAL9X24A	1 – 4-Conductor Cable 20’ (6.1m)
KASML9X30A		KASAL9X30A	1 – Hardware Kit
KASML9X36A		KASAL9X36A	
KASML12X9A		KASAL12X9A	1 – Control Switch
KASML12X12A		KASAL12X12A	
KASML12X18A		KASAL12X18A	
KASML12X24A		KASAL12X24A	
KASML12X30A		KASAL12X30A	
KASML12X36A		KASAL12X36A	
KASML12X42A		KASAL12X42A	

KA Aluminum Alloy Trim Tab Kit Model Number

<u>K</u>	<u>A</u>	<u>SL</u>	<u>12</u> X <u>12</u>	<u>A</u>
K = 6’ (1.8m) Actuator Cable with 20’ (6.1m) wire bundle and hardware kit	A = Standard Actuator 12vdc, 2.25” (57mm) stroke, 8 second stroke time B = Standard Actuator 24vdc, 2.25” (57mm) stroke, 8 second stroke time S = Short Actuator 12vdc, 1.5” (38mm) stroke, 6 second stroke time	SL = SLC-11 Black LED Control F = Flat Rocker Switch SML = MLC-1 Manual Level Control SAL = ALC-1 Auto Level Control	2nd Number = Tab Width Across Transom (inches) 1st Number = Tab Chord Length (inches)	A=Aluminum Alloy Tab

KA Stainless Steel Trim Tab Kits (Control Switch Not Included)


Lectrotab Kit Number	KA Kits Contain these Parts
KA9X9	2 – Actuators with 6' (1.8m) cable 2 – Flat Stainless Steel Tabs, 12 Gauge 1 – 4-Conductor (14 AWG) Wire Bundle 20' (6.1m) 1 – Hardware Kit 
KA9X12	
KA9X18	
KA9X24	
KA9X30	
KA9X36	
KA12X9	
KA12X12	
KA12X18	
KA12X24	
KA12X30	
KA12X36	
KA12X42	

KA Stainless Steel Trim Tab Kit Model Number

<u>K</u>	<u>A</u>	<u> </u>	<u>12</u>	X	<u>12</u>
K = 6'(1.8m) Actuator Cable Includes hardware kit and 20' (6.1m) wire bundle	A = Standard Actuator 12vdc, 2.25" (57mm) stroke, 8 second stroke time B = Standard Actuator 24vdc, 2.25" (57mm) stroke, 8 second stroke time S = Short Actuator 12vdc, 1.5" (38mm)	No Designation = Control Not Included	1st Number = Tab Chord Length (inches)		2nd Number = Tab Width Across Transom (inches)

Bennett Trim Tab Owners...


why repair when you can **UPGRADE?**

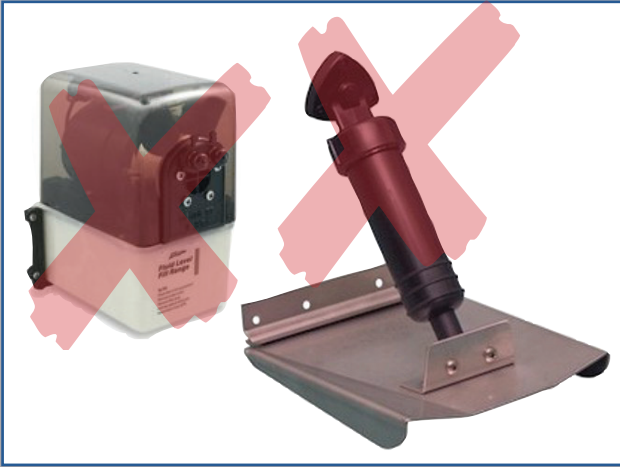


Lectrotab key advantages over Bennett Hydraulic Systems...

- ✓ *No risk of hydraulic fluid leaks*
- ✓ *Unique design features*
- ✓ *100% reliable tab position indication*
- ✓ *No maintenance required*

- 1** Upper seal, located above any point on the ram which is exposed to fouling, cannot be damaged and is the primary ram sealing element.
- 2** Controlled torque thrust bearing surface for good service life and positive braking against reverse freewheeling. Prevents unwanted tab retraction when under way.
- 3** Vent-tube check valve allows air in but not out, thus providing automatic internal pressurization to about 8 PSI when the tab is retracted.
- 4** Upper bracket can be positioned from vertical through horizontal and matches Bennett mounting hole pattern.

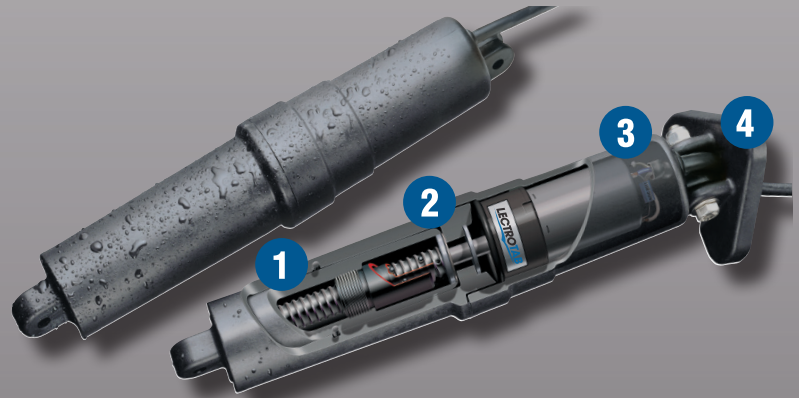

CONTROL OPTIONS



Rocker Switch

- Performs all standard trim tab control functions
- Water resistant switches
- Easily upgraded to One Touch LED control switch



One Touch LED Control

- Combines a microprocessor based trim tab control with LED tab position indicators
- Completely sealed watertight
- Automatic tab retraction during ignition key switch or auxiliary switch off

WHY LECTROTAB?

- Unique Design Features
- World Class Customer Support
- Auto Leveling Control Option

EASY INSTALLATION

- Uses existing Bennett trim tabs
- Uses same mounting holes as Bennett actuators
- Uses existing Bennett wiring harness




Bennett to Lectrotab Actuator Upgrade Installation & Wiring Instructions...




Choose Standard Switch
Panel (SAF-SC)

Connect the Bennett wire
harness to the switch
panel using the supplied
connectors





Power Input:
Breaker or Fuse
+12V DC = 20 Amps
+24V DC = 10 Amps
14 AWG Wire

or One Touch LED
Control (SLC-11)



AUX signal input (orange) must be
connected to ignition switched +12V
or 24V DC or Auxiliary panel switch
source to enable power up and
retraction of tabs

Remove the Bennett wires from the hydraulic pump and
connect using supplied terminals and block as shown

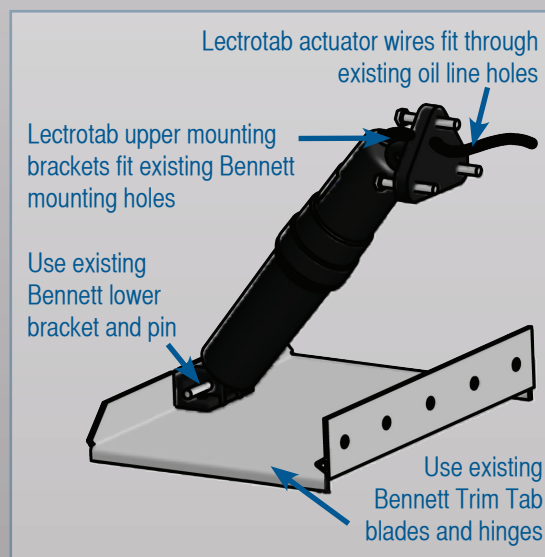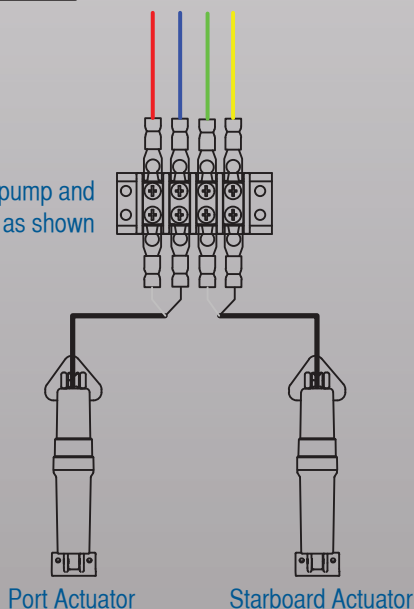

Lectrotab Retro-Fit Kits using existing wiring from Actuator to display (for standard Bennett 4-ring Actuator A1101A)

Part Number	Remote Type	Actuator Type	Cable Length	Hardware Kit
RBKAF	Rocker Switch	Standard (x2)	6' / 1.8m (included)	included
RBKASL	One Touch LED Control	Standard (x2)	6' / 1.8m (included)	included

Lectrotab Retro-Fit Kits using new wiring from Actuator to display (for standard Bennett 4-ring Actuator A1101A)

Part Number	Remote Type	Actuator Type	Cable Length	Hardware Kit
RBXKAF	Rocker Switch	Standard (x2)	23' / 7m (included)	N/A
RBXKASL	One Touch LED Control	Standard (x2)	23' / 7m (included)	N/A

*For installation and wiring information please visit our website www.lectrotab.com



Retrofit Trim Tab Kit for Bennett (Use existing wiring from actuator to display)

Lectrotab Kit with Rocker Switch		Lectrotab Kit with SLC-11
		
RBKAF (4-ring Bennett)		RBKASL (4-ring Bennett)
RBKSF (3-ring Bennett)		RBKSSL (3-ring Bennett)

RBKA Kits Contain these Parts

2 – Actuators with 6' (1.8m) cable



1 – Control Switch

Rocker Switch



SLC-11 Control



MLC-1 Control



*No Control Included

ALC-1 Control



1 – Hardware Kit



Retrofit Trim Tab Kit for Bennett (Use new wiring from actuator to display)

Lectrotab Kit with Rocker Switch		Lectrotab Kit with Black LED
		
RBXKAF		RBXKASL
		RBXKSSL (3-ring Bennett)

RBXKA Kits Contain these Parts

2 – Actuators with 23' (7m) cable



1 – Control Switch

Rocker Switch



SLC-11 Control



MLC-1 Control



ALC-1 Control



LECTROTAB Lectrotab Refit Kit for Bennett Hydraulic

Retrofit Trim Tab Kit for Bennett (Use existing wiring from actuator to display)

Lectrotab Kit with MLC-1		Lectrotab Kit with ALC-1
		
RBKASML (4-ring Bennett)		RBKASAL
RBKSSML (3-ring Bennett)		RBKSSAL

RBKA Kits Contain these Parts

2 – Actuators with 6' (1.8m) cable



1 – Control Switch

Rocker Switch



SLC-11 Control



MLC-1 Control



ALC-1 Control



1 – Hardware Kit



Retrofit Trim Tab Kit for Bennett (Use new wiring from actuator to display)

Lectrotab Kit with MLC-1		Lectrotab Kit with ALC-1
		
RBXKASML (4-ring Bennett)		RBXKASAL
RBXKSSML (3-ring Bennett)		RBXKSSAL

RBXKA Kits Contain these Parts

2 – Actuators with 23' (7m) cable



1 – Control Switch

Rocker Switch



SLC-11 Control



MLC-1 Control



ALC-1 Control

