

SIONYX

Catalog

SIONYX

+MARINE



NIGHTWAVE[®]DIGITAL

HIGH RESOLUTION LOW-LIGHT MARINE CAMERA

Meet the next generation of ultra-low-light marine imaging. Nightwave Digital delivers unmatched clarity—even in moonless starlight—thanks to the enhanced IP (PoE) digital connectivity and advanced Black Silicon CMOS sensor, outshining traditional thermal cameras.

Nightwave Digital offers higher resolution, greater reliability, and seamless integration with networked MFD systems. With flexible mounting options and an intuitive setup, it's built for captains who want safety without complexity. Less guesswork, more peace of mind. Whether cruising, fishing, or docking after dark, Nightwave Digital helps you stay safe—and enjoy every moment on the water.



NW DIGITAL BLACK

SKU C018900

UPC-A 811251020613

NW DIGITAL WHITE


SKU C018800

UPC-A 811251020606

CORE FEATURES


- Seamless integration with all major brand MFDs
- Network (POE) compatibility 
- Engineered for large screens (higher resolution)
- Connectivity with app control via Wi-Fi
- One camera to multiple MFDs or multiple cameras to one MFD

WHY NIGHTWAVE DIGITAL? THE DIFFERENCE IS CLEAR

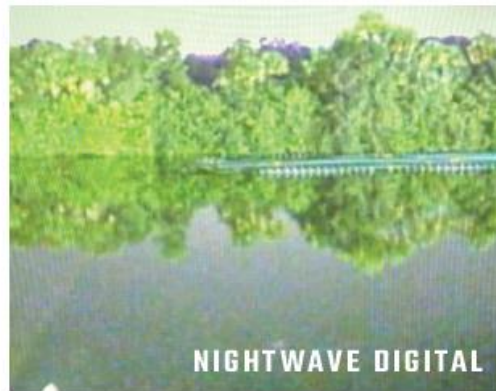

DETECTION RANGE

MAN-SIZED OBJECT	300 M / 984 FT
MARINE VESSEL	4.02 KM / 2.5 MILES



SIONYX

LOW-LIGHT SENSOR

IMAGE SENSOR	COLOR XQE1350 BSI CMOS
RESOLUTION	1280 X 1024
FRAME RATE	UP TO 30HZ
MIN ILLUMINATION	MOONLESS STARLIGHT (<0.001 LUX)
FOCUS RANGE	FIXED 10M TO INFINITY
HORIZONTAL FIELD OF VIEW	44°
DAY & NIGHT	AUTO DAY/NIGHT FILTER
VISIBLE SPECTRUM	400-1200 NM
LENS	16MM F/1.4

127 MM | 5 IN



175 MM | 6.9 IN

PHYSICAL PROPERTIES

WEIGHT	1 KG [2.2 LBS]
DIMENSIONS	127 X 175 MM [5 X 6.9 IN]
MATERIAL	UV RESISTANT POLYCARBONATE
MOUNTING OPTIONS	BALL UPRIGHT OR BALL DOWN 4 BOLT PATTERN INTO FIBERGLASS/WOOD/METAL OR 4 ¼-20 PATTERN INTO BASE

SYSTEM

POWER	 POE [37-57 VDC / TYP 48 VDC]
CONSUMPTION	5W NOMINAL
IMAGE SETTINGS	BRIGHTNESS, CONTRAST, SHARPNESS, SATURATION, DAY & NIGHT, HDR, ORIENTATION, NOISE REDUCTION
MOBILE APP	IOS & ANDROID WI-FI + BLUETOOTH SOFTWARE UPDATES IMAGE SETTINGS
IP VIDEO OUT	H264 MAIN PROFILE MAIN: 1280 X 1024 / SUB : 640 X 512 30 FPS, 30 GOP

NETWORK COMPATIBILITY

GARMIN | RAYMARINE | NAVICO (SIMRAD)

ENVIRONMENTAL

OPERATING TEMPERATURE	-20°C TO +50°C
STORAGE TEMPERATURE	-30°C TO +70°C
WATER INGRESS	IP67
SHOCK & VIBRATION	20G VERTICAL 10G HORIZONTAL IEC 60945; MIL-STD-810E
WIND	100 MPH (161 KPH)
SOLAR UV EXPOSURE	MIL-STD-810G



For information, contact :

BRUNGER EXPORT INC.

4901 NW 17th Way, Suite 600

Ft. Lauderdale, FL 33309

954.928.1245 - www.brungerexport.com - info@brungerexport.com



SIONYX **NIGHTWAVETM D1**

MARINE COLOR DIGITAL NIGHT VIEWING CAMERA

MODEL NO
CRV-500C

Nightwave is an ultra low-light marine navigational camera built around SIONYX's patented Black Silicon CMOS sensor. It allows mariners of all levels to easily spot obstacles and debris in moonless starlight without white light or expensive thermal cameras – navigating safely, avoiding collisions, and maximizing time on the water. With flexible mounting options and easy setup, Nightwave connects to other hardware via analog output, displaying clear color digital night views.



NIGHTWAVE D1 GRAY
SKU C014700
UPC-A 811251020231

NIGHTWAVE D1 WHITE
SKU C012800
UPC-A 811251020149

NIGHTWAVE D1 BLACK
SKU C014900
UPC-A 811251020248

CONNECTED

Seamless integration with major brand MFDs via the analog video output. Convenient installation flexibility and WiFi communication for command and control.

RUGGED

IP67 rating protects against water, sand, salt, and dust. Dry nitrogen purged to prevent lens fogging. Safely use Nightwave in inclement weather conditions.

CAPABLE

<1 MLX MOONLESS STARLIGHT sensitivity allows you to see well beyond human eyesight.

AWARE

44° field of view increases situational awareness to spot unexpected obstacles, debris, markers, vessels, and more.

CAMERA

SENSOR TYPE	XQE1350 BSI CMOS
RESOLUTION	1280 X 1024
FRAME RATE	30 HZ
HORIZONTAL FOV	44°
VISIBLE SPECTRUM	400-1200NM
FOCUS RANGE	10M TO INFINITY
LENS	16MM F/1.4

SYSTEM

VIDEO OUT	NTSC (640 X 480 @ 30 HZ)
VIDEO CONNECTION	SMA / BNC/ RCA
WIRELESS COMMUNICATIONS	WIFI + BLUETOOTH
POWER IN	12V DC
POWER CONNECTION	TINNED COPPER WIRE

ENVIRONMENTAL

INGRESS PROTECTION	IP67 WATER/DUST RESISTANT
SHOCK & VIBRATION	IEC60945 [V15G H:9G] IK08
OPERATING TEMPERATURE	-20°C TO +50°C
STORAGE TEMPERATURE	-20°C TO +80°C

RANGE PERFORMANCE

	CLEAR WEATHER AT 1/4 MOON
DETECT MAN-SIZED OBJECT	150 M

All product, product specification, and data are subject to change without notice to improve reliability, function, design, or otherwise. Visit [SIONYX.COM](https://www.sionyx.com) for up-to-date documentation.


CAMERA - PHYSICAL

WEIGHT	870 G [1.9 LBS]
DIMENSIONS	127 X 127 X 152 MM [5 X 5 X 6 IN]
MOUNTING OPTIONS	TRIPOD OR RAMMOUNT
	SINGLE 1/4" 20 CENTER MOUNT
	BULKHEAD MOUNT: 4 X M6 BLIND HOLES
	TOP-DOWN MOUNTING HOLES
MATERIAL	UV RESISTANT POLYCARBONATE

INCLUDED

CAMERA	DIGITAL VIDEO CABLE USB
CABLE [5M]	BASE GASKET
SMA TO BNC ADAPTER	MOUNTING HARDWARE
BNC TO RCA ADAPTER	INSTALL TEMPLATE
POWER FUSE & FUSE HOLDER	USER MANUAL

EYESIGHT VS NIGHTWAVE



Get connected with the SIONYX Mobile App



SYSTEM

MAN-SIZED TARGET (AT 1/4 MOON)	150 M
NIGHT VISION CAPABILITIES	2 MLX NEAR-MOONLESS STARLIGHT
DIGITAL MAGNIFICATION	1X - 3X
DIOPTER ADJUSTMENT	-4 TO +4
FOCUS RANGE	.3M TO INFINITY
MICRO OLED	1024 X 768
EYE RELIEF	7.5 MM - 20 MM
WEIGHT	274 G
VISIBLE SPECTRUM	400 - 1100 NM

ENVIRONMENTAL

INGRESS PROTECTION	IP67 WATER/DUST RESISTANT
IMPACT RESISTANCE	1 M ON CONCRETE
TEMPERATURE RANGE	-20°C TO +50°C


OPERATION

WI-FI ENABLED	YES
BATTERY LIFE	2 HOURS
LENS	16 MM F/1.4
FRAME RATE	60 HZ
VIDEO	720P .MOV

OTHER

STORAGE CAPACITY	32 GB
MICRO SD INCLUDED	32 GB
CAMERA BATTERIES INCLUDED	2
USB CABLE INCLUDED	1
WARRANTY	2 YEARS
HARDSHELL CASE	

GREEN PHOS VS SIONYX

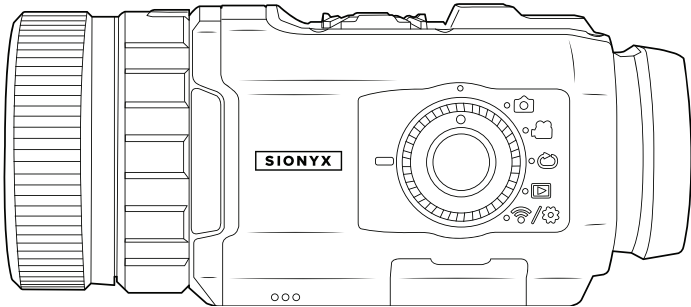

52.50 MM | 2.10 IN

118.55 MM | 4.67 IN

All product, product specification, and data are subject to change without notice to improve reliability, function, design, or otherwise. Visit [SIONYX.COM](https://www.sionyx.com) for up-to-date documentation.

SIONYX AURORA PRO

COLOR DIGITAL NIGHT VIEW

The SIONYX Aurora PRO is our flagship full color digital night viewing optic. The PRO is the latest development with both new sensor technology and enhanced optics giving the viewer the most advanced digital night vision capabilities. The PRO performs best in the darkest conditions. It's designed with extreme environments in mind and has all of the great recording and streaming functionality as the rest of the Aurora line. The Aurora PRO is a top choice for law enforcement agencies and outdoor adventurers across the globe and has been leveraged for both surveillance and evidence gathering. If you're looking for the best in color night view, that can see further into the darkness, the Aurora PRO is the night vision camera for you.

SKU C011300
UPC 811251020064



RUGGED

IP67 rated, submersible to 3 ft for 30 minutes. You can safely use the Aurora PRO in inclement weather conditions.

CAPABLE

<1 MLX MOONLESS STARLIGHT sensitivity allows you to see well beyond human eyesight.

AWARE

44° field of view, GPS, and compass increase situational awareness and enhance data collection.

SYSTEM

MAN-SIZED TARGET (AT 1/4 MOON)	150 M
NIGHT VISION CAPABILITIES	<1 MLX MOONLESS STARLIGHT
DIGITAL MAGNIFICATION	1X - 3X
DIOPTER ADJUSTMENT	-4 TO +4
FOCUS RANGE	.3M TO INFINITY
MICRO OLED	1024 X 768
EYE RELIEF	7.5 MM - 20 MM
WEIGHT	274 G
VISIBLE SPECTRUM	400 - 1100 NM

ENVIRONMENTAL

INGRESS PROTECTION	IP67 WATER/DUST RESISTANT
IMPACT RESISTANCE	1 M ON CONCRETE
TEMPERATURE RANGE	-20°C TO +50°C

OPERATION

WI-FI ENABLED	YES
BATTERY LIFE	2 HOURS
LENS	16 MM F/1.4
FRAME RATE	60 HZ
VIDEO	720P .MOV

FEATURES



METADATA (TIME + LOCATION)
GPS + COMPASS
ACCELEROMETER

OTHER

STORAGE CAPACITY	256 GB
MICRO SD INCLUDED	32 GB
CAMERA BATTERIES INCLUDED	2
USB CABLE INCLUDED	1
WARRANTY	2 YEARS
HARDSHELL CASE	1

All product, product specification, and data are subject to change without notice to improve reliability, function, design, or otherwise. Visit SIONYX.COM for up-to-date documentation.

EYESIGHT VS AURORA PRO

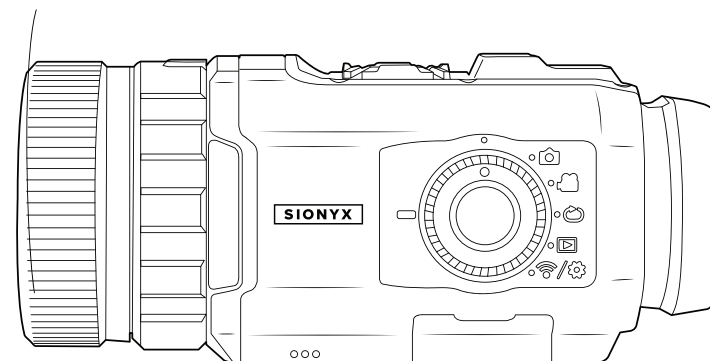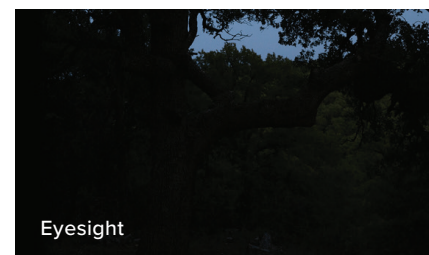

52.50 MM | 2.10 IN

118.55 MM | 4.67 IN



For information, contact :

BRUNGER EXPORT INC.

4901 NW 17th Way, Suite 600

Ft. Lauderdale, FL 33309

954.928.1245 - www.brungerexport.com - info@brungerexport.com