


Full Spectrum Thru Hull Underwater Luminaire

Designed for seamless thru-hull installation, Metro Marine's Full Spectrum intelligent lighting fixture delivers powerful, uniform illumination, with exceptional color, and incredibly high Lumen Output.

This fixture incorporates Metro's patented technologies that address the primary causes of underwater lighting failure -- biofouling & condensation. Our patented UVC technology stops biofouling from forming on the lenses of our fixtures. Our patented Assembly Method prevents condensation from forming inside our fixtures. Each luminaire also features true dynamic full spectrum RGBW light, producing richer color blends and higher-quality whites than conventional RGB systems. The result is a highperformance solution engineered for durability, reduced maintenance, and consistent visual output over time.

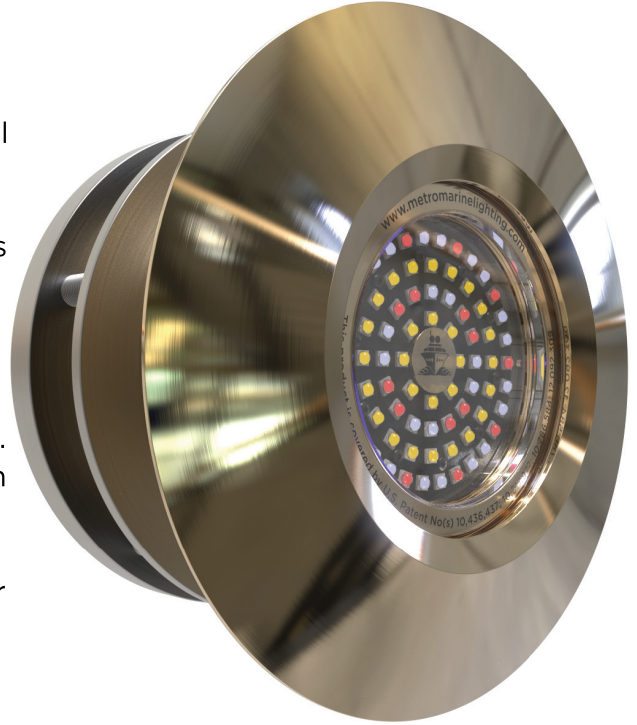

Key Features

Patented Anti-Biofouling Technology

Uses UVC to always keep lenses clean & growth-free!

Patented Assembly Method

Eliminates condensation from being able to form inside the fixture!

Full Spectrum RGBW Technology

True dynamic color blending with superior whites

Thru Hull Installation

Clean, flush-mounted design for premium vessel integration

High Output Performance

Designed for powerful underwater illumination (18,000+ Lm)

Close Mixing Distance

Eliminates visible color separation

Patented Technology Platform

U.S. patents: 10,436,437; 10,517,972; 10,786,584; 12,092,309 Foreign Patents Pending

Rugged Marine Construction

Aluminum bronze housing engineered for long-term submersion

Advanced Thermal Protection

Intelligent temperature monitoring protects fixture longevity

SPECIFICATIONS*

*Due to continuous improvements and innovations, specifications may change without notice.

Output

Beam Angle: 120°

Total Fixture Lumens: 54,000+ Lm

White Lumens (Maximum): 18,000 Lm

LED Channels: RGBW

Electrical

Input Voltage (Fixture): 24VDC

Input Voltage (HUB): 10VDC - 30VDC

Power Consumption: 150 W

Control



Interface: MM-CC-V1 / F-HB-2-FS

Key Dimensions

Face diameter: 6.417 in (163.000 mm)

Overall length: 6.640 in (168.656 mm)

Body diameter: 3.858 in (98.000 mm)

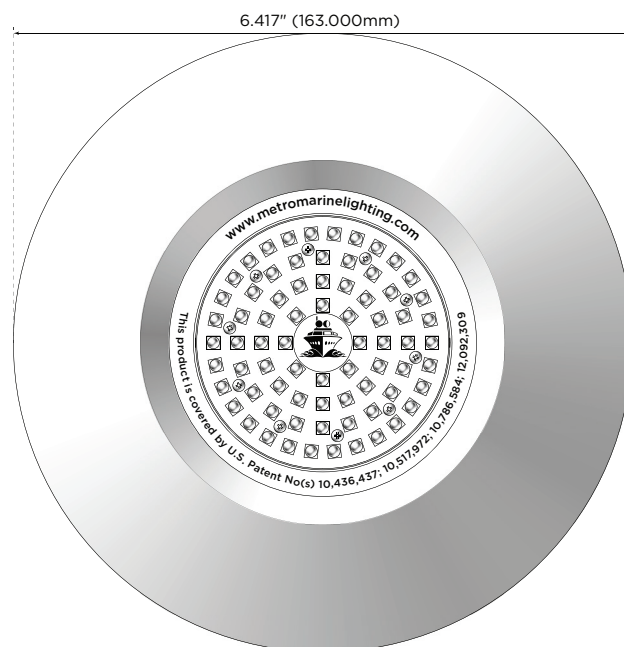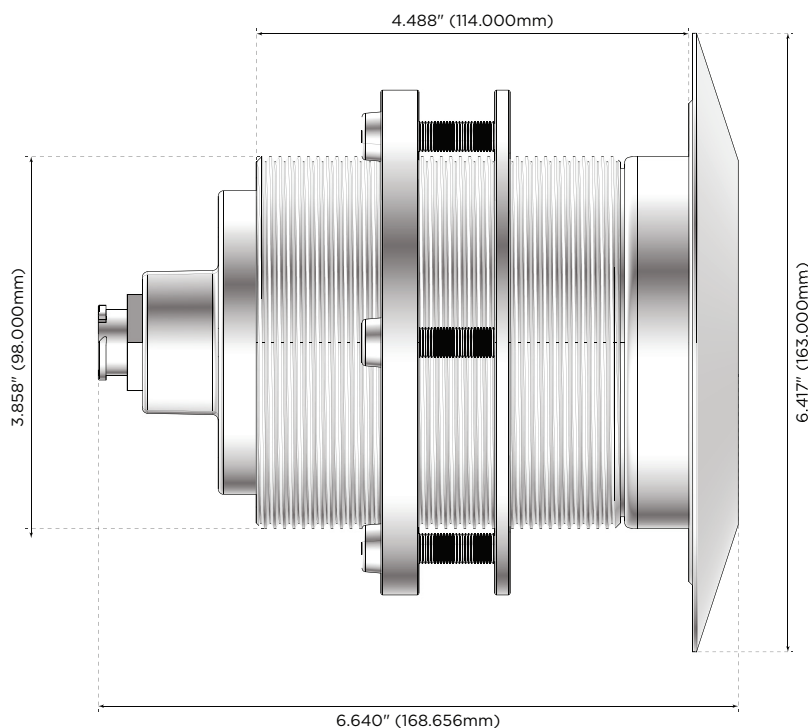

For detailed support information, visit www.metro marinelighting.com/support

SYSTEM OVERVIEW

Metro Marine's thru-hull fixture is designed to integrate seamlessly into the vessel while remaining compatible with Metro's broader RGBW control platform. Unified power/data architecture simplifies installation and supports refined color control across the full lighting system.

ACCESSORIES

Full Spectrum Hub: F-HB-2-FS

Control Center: MM-CC-V1


- GARMIN™ OneHelm™ certified
- NMEA 2000 certified




CERTIFICATION / ENVIRONMENT

Wet location rated | IP68 submersible

FRONT VIEW

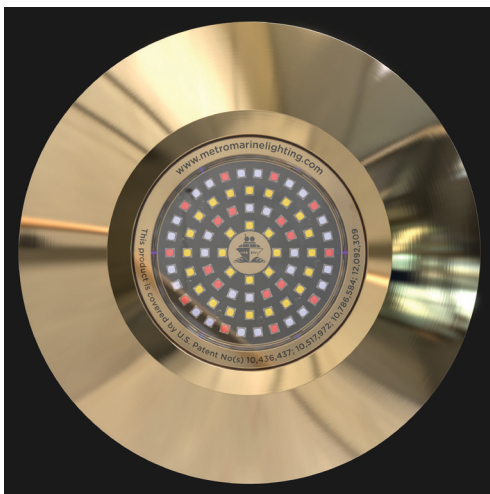

TOP VIEW

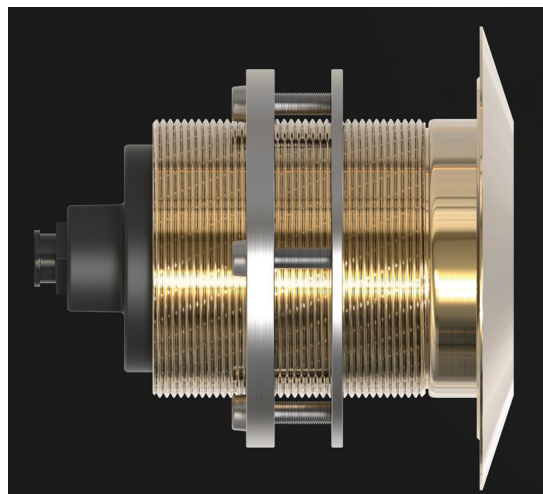

BACK VIEW

