



Marine Products



The Original Marine-Grade Polymer Sheet

King StarBoard® is the original marine-grade high-density polyethylene sheet and the leading brand in the marine industry. The King name is synonymous with quality to those who know plastics, and the King StarBoard® brand has been helping pros build better boats for more than thirty-years. It is the product of a proprietary process called K-Stran™, the most advanced manufacturing process for superior flatness and consistency. King StarBoard® has a matte finish on both sides of the sheet. It is environmentally stabilized to withstand the harshest outdoor conditions. King StarBoard® will not rust, delaminate or rot when exposed to UV, humidity or water. It is ideal for a variety of marine applications from replacing wood, to building boat components and furniture. The polymer sheet never needs painting or refinishing, works like wood, and is easy to fabricate with common woodworking tools and techniques.

King StarBoard® is upgradable to King MicroShield® with an advanced antimicrobial technology for protecting the product surface against stain and odor causing bacteria, algae and fungi.*

King StarBoard® is upgradable with King FlameShield, for ASTM E-84 Class A Flame Compliance and CAN/ULC-S102 for Canadian Compliance.

For more information about King MicroShield® and King FlameShield, please visit www.kingplastic.com

KING STARBOARD®

Applications

- Bow Pulpits
- Countertops
- Frames and Trim
- Furniture
- Grab Rails and Handles
- Hatches and Doors
- Rod and Cup Holders
- Steps and Dock Boxes
- Tray Tables

Specifications

Standard Sheet Sizes

in: 48" x 96" 54" x 96"
mm: 1219 mm x 2438 mm 1371.6 mm x 2438 mm

1-1/2" gauge, all standard colors available
 1/4" up to 1" gauges available in black or white

All standard colors available

Standard Gauges

in: 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1-1/2"
mm: 6.4 mm | 9.53 mm | 12.7 mm | 19 mm | 25.4 mm | 38 mm

Approximate Weight 48" x 96"

lbs: 40 lbs | 60 lbs | 80 lbs | 120 lbs | 160 lbs | 240 lbs
kg: 18.14 kg | 27.2 kg | 36.3 kg | 54.4 kg | 72.5 kg | 108.8 kg

Approximate Weight 54" x 96"

lbs: 45 lbs | 67.5 lbs | 90 lbs | 135 lbs | 180 lbs
kg: 20.4 kg | 30.6 kg | 40.8 kg | 61.2 kg | 81.6 kg

Tolerance information: Gauges 1/4" up to 1-1/2" ± 5%
 Length and width plus only at room temperature

Custom sheet sizes, gauges, and colors available

Standard Colors



Black




Charcoal Gray




Dolphin Gray



Light Gray



Sansshade



Seafoam



Arctic White



White/White

Note: Color accuracy can vary considerably on computer monitors and printers. Please consult your distributor for a product sample before making critical color choices. Disclaimer: King MicroShield® may affect color. King FlameShield may affect finish and color.

*For bacteriostatic, fungistatic, & algistatic properties. This product is exempt from registration under 40 CFR 152.25(a). King MicroShield® effectiveness verified by ISO and ASTM standards. This product does not protect users or others from disease-causing bacteria. Always clean this product thoroughly after use.

Properties	Units	ASTM	Nominal Values
Density	g/cc	D1505	0.955
Tensile Strength @ Yield	psi	D638	>4,100
Tensile Modulus	psi	D638	255,000
Elongation @ Break	%	D638	>600
Elongation @ Yield	%	D638	9.8
Flexural Modulus	psi	D790	185,000
Flexural Stress @ 5% Strain	psi	D790	3,810
Compressive Properties 10% Strain	psi	D695	4,950
Durometer	Shore D	D2240	68
Tensile Impact	ft.lbs./in. ²	D1822	115
Izod Impact Resistance	ft.lbs./in. ²	D256	1.1
Brittleness Temp.	°C (°F)	D746	<-76°C (<-105°F)
Vicat Softening Temp.	°C (°F)	D1525	128°C (262°F)
Heat Deflection Temp. 66 psi	°C (°F)	D648	99°C (210°F)
Screw and Nail Withdrawal	lbs	D1761	657 & 63
Flammability	Rating	UL94	HB

All values are determined on specimens prepared according to ASTM standards.

Nominal values should not be interpreted as specifications.

King StarBoard® is made entirely from FDA and USDA approved material.

King StarBoard® meets ASTM D4976. | The raw material used to make King StarBoard® does not contain BPA's or Phthalates.



King Plastic Corporation

Our Innovation. Your Imagination.®

1100 N. Toledo Blade Blvd. | North Port, FL 34288 USA


P: 941.493.5502 | F: 941.497.3274 | www.kingplastic.com



MADE IN USA



Marine Products

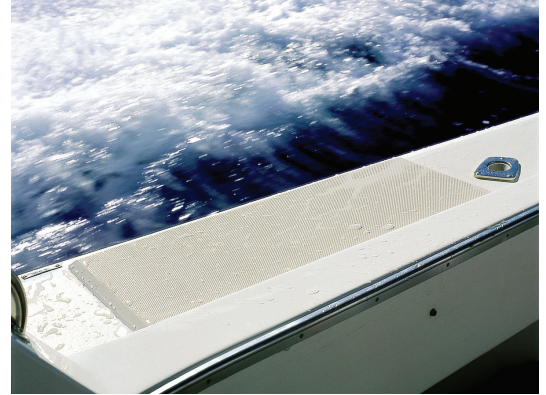

The Anti-Skid Marine-Grade Polymer Sheet

King StarBoard® AS is an anti-skid, marine-grade, high-density polyethylene sheet. It is the product of a proprietary process called K-Stran™, the most advanced manufacturing process for superior flatness and consistency. King StarBoard® AS has a dot or diamond pattern on one side of the sheet and a matte finish on the other side. The special, high-friction anti-skid surface helps prevent slipping and promotes drainage. It is environmentally stabilized to withstand the harshest outdoor conditions. King StarBoard® AS will not rust, delaminate or rot when exposed to UV, humidity or water. It is ideal for a variety of high-traffic marine applications from decking and swim platforms to ladder steps where traction is critical. For maximum versatility, standard colors are made to coordinate with the original King StarBoard®. The polymer sheet never needs painting or refinishing, works like wood, and is easy to fabricate with common woodworking tools and techniques.

**KING
STARBOARD® AS**

Applications

- Bow Pulpits
- Decking
- Hatches
- Ladder Steps
- Swim Platforms
- Swimming Pool Grating
- Shower Floors
- Stairways and Entry Ways

Specifications

Standard Sheet Size

in: 54" x 96"

mm: 1371.6 mm x 2438 mm

Standard Gauges

in: 1/2" | 3/4" | 1"

mm: 12.7 mm | 19 mm | 25.4 mm

Approximate Weight

lbs: 90 lbs | 135 lbs | 180 lbs

kg: 41 kg | 61 kg | 81.6 kg

Tolerance information: Gauges 1/2" up to 1" ±5%
Length and width plus only at room temperature

Custom sheet sizes, gauges and colors available

Standard Colors




Black




Charcoal Gray




Dolphin Gray



Light Gray



Sansshade



Seafoam




White/White

Note: Color accuracy can vary considerably on computer monitors and printers.
Please consult your distributor for a product sample before making critical color choices.

Textures



Diamond



Dot

Properties	Units	ASTM	Nominal Values
Density	g/cc	D1505	0.955
Tensile Strength @ Yield	psi	D638	>4,100
Tensile Modulus	psi	D638	255,000
Elongation @ Break	%	D638	>600
Elongation @ Yield	%	D638	9.8
Flexural Modulus	psi	D790	185,000
Flexural Stress @ 5% Strain	psi	D790	3,810
Compressive Properties 10% Strain	psi	D695	4,000
Durometer	Shore D	D2240	66
Tensile Impact	ft.lbs./in. ²	D1822	115
Izod Impact Resistance	ft.lbs./in. ²	D256	1.1
Brittleness Temp.	°C (°F)	D746	<-76°C (<-105°F)
Vicat Softening Temp.	°C (°F)	D1525	123°C (253°F)
Heat Deflection Temp. 66 psi	°C (°F)	D648	75°C (167°F)
Screw and Nail Withdrawal	lbs	D1761	657 & 63
Flammability	Rating	UL94	HB
Slip Resistance (wet)	SCOF-Wet	ANSI B101.1	0.84

All values are determined on specimens prepared according to ASTM.

Nominal values should not be interpreted as specifications.

King StarBoard® AS is made entirely from FDA and USDA approved material.

King StarBoard® AS meets ASTM D4976.

The raw material used to make King StarBoard® AS does not contain BPA's or Phthalates.



King Plastic Corporation

Our Innovation. Your Imagination.®

1100 N. Toledo Blade Blvd. | North Port, FL 34288 USA


P: 941.493.5502 | F: 941.497.3274 | www.kingplastic.com



MADE IN USA



Marine Products

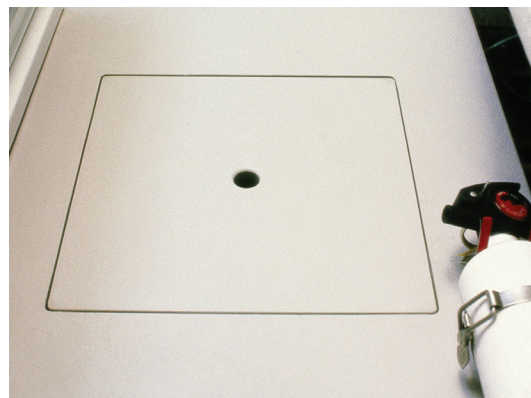

The Lightweight Marine-Grade Cellular Utility Sheet

King StarLite® XL is an economical, cellular (closed cell), utility sheet made from select high-grade King StarBoard® recycled high-density polyethylene. The polymer is up to 35% lighter than the original King StarBoard®. It is the product of a proprietary process called K-Stran™, the most advanced manufacturing process for superior flatness and consistency. King StarLite® XL has a matte finish on both sides of the sheet. It is environmentally stabilized to withstand the harshest outdoor conditions. King StarLite® XL will not rust, delaminate or rot when exposed to UV, humidity or water. It is ideal for a variety of marine applications from boat components, to upholstery substrate and other behind-the-scenes applications where edges aren't visible. The polymer sheet never needs painting or refinishing, works like wood, and is easy to fabricate with common woodworking tools and techniques.

King StarLite® XL is upgradable to King MicroShield® with an advanced antimicrobial technology for protecting the product surface against stain and odor causing bacteria, algae and fungi.*

For more information about King MicroShield®, please visit www.kingplastic.com

KING STARLITE[®] XL

Applications

- Deck Components and Equipment Mounts
- Doorstops and Thresholds
- Recess Hatches and Bait Well Covers
- Tackle Centers
- Upholstery Substrate

Specifications

Standard Sheet Size

in: 60" x 96"

mm: 1524 mm x 2438 mm

Standard Gauges

in: 1/4" | 3/8" | 1/2" | 3/4"

mm: 6.4 mm | 9.53 mm | 12.7 mm | 19 mm

Approximate Weight

lbs: 40 lbs | 56 lbs | 72 lbs | 108 lbs

kg: 18.14 kg | 25.4 kg | 32.6 kg | 49 kg

Tolerance information: Gauges 1/4" up to 3/4" $\pm$ 5%
Length and width plus only at room temperature

Custom sheet sizes and gauges available


Standard Colors



Utility Black



Utility Gray



Utility White

Note: Color accuracy can vary considerably on computer monitors and printers.
Please consult your distributor for a product sample before making critical color choices.
Disclaimer: King MicroShield® may affect color.

*For bacteriostatic, fungistatic, & algistatic properties. This product is exempt from registration under 40 CFR 152.25(a). King MicroShield® effectiveness verified by ISO and ASTM standards. This product does not protect users or others from disease-causing bacteria. Always clean this product thoroughly after use.

Properties	Units	ASTM	Nominal Values
Density	g/cm ³	D792	0.70
Tensile Strength @ Yield	psi	D638	>3,300
Tensile Modulus	psi	D638	165,000
Elongation @ Yield	%	D638	9.6
Flexural Modulus	psi	D790	130,000
Flexural Stress @ 5% Strain	psi	D790	2,990
Compressive Properties 10% Strain	psi	D695	2,910
Durometer	Shore D	D2240	64.9
Izod Impact Resistance	ft.lbs./in. ²	D256	1.4
Heat Deflection Temp. 66 psi	°C (°F)	D648	87°C (188°F)
Screw Holding Strength	lbs	D1761	325
Flammability	Rating	UL94	HB

All values are determined on specimens prepared according to ASTM.

Nominal values should not be interpreted as specifications.

King StarLite® XL is made entirely from FDA and USDA approved material.



King Plastic Corporation

Our Innovation. Your Imagination.®

1100 N. Toledo Blade Blvd. | North Port, FL 34288 USA

P: 941.493.5502 | F: 941.497.3274 | www.kingplastic.com



MADE IN USA



Marine Products



The Lightweight Marine-Grade Cellular Sheet

King StarBoard® XL is a lightweight, marine-grade, cellular high-density polyethylene sheet that is up to 30% lighter than the original King StarBoard®. It is the product of a proprietary process called K-Stran™, the most advanced manufacturing process for superior flatness and consistency. King StarBoard® XL has a matte finish on both sides of the sheet. It is environmentally stabilized to withstand the harshest outdoor conditions. King StarBoard® XL will not rust, delaminate or rot when exposed to UV, humidity or water. It is ideal for a variety of marine applications from boat components to equipment mounts, and looks good enough to use in high-visibility applications where structural strength and a finished edge are not important. For maximum versatility, standard colors are made to coordinate with the original King StarBoard®. The polymer sheet never needs painting or refinishing, works like wood, and is easy to fabricate with common woodworking tools and techniques.

King StarBoard® XL is upgradable to King MicroShield® with an advanced antimicrobial technology for protecting the product surface against stain and odor causing bacteria, algae and fungi.*

For more information about King MicroShield®, please visit www.kingplastic.com

KING STARBOARD® XL

Applications

- Cockpit Covers
- Deck Components and Equipment Mounts
- Doorstops and Thresholds
- Electronic Mounts
- Ladder Steps
- Recess Hatches and Bait Well Covers
- Tackle Centers

Specifications

Standard Sheet Size

in: 60" x 96"

mm: 1524 mm x 2438 mm

Standard Gauges

in: 1/4" | 3/8" | 1/2" | 3/4"

mm: 6.4 mm | 9.53 mm | 12.7 mm | 19 mm

Approximate Weight

lbs: 40 lbs | 61.5 lbs | 80 lbs | 120 lbs

kg: 18.14 kg | 27.89 kg | 36.28 kg | 54.43 kg

Tolerance information: Gauges 1/4" up to 3/4" $\pm$ 5%
Length and width plus only at room temperature

Custom sheet sizes, gauges, and colors available

Standard Colors




Black




Charcoal Gray




Dolphin Gray



Light Gray



Sansshade



Seafoam



White/White

Note: Color accuracy can vary considerably on computer monitors and printers.

Please consult your distributor for a product sample before making critical color choices.

Disclaimer: King MicroShield® may affect color.

*For bacteriostatic, fungistatic, & algistatic properties. This product is exempt from registration under 40 CFR 152.25(a). King MicroShield® effectiveness verified by ISO and ASTM standards. This product does not protect users or others from disease-causing bacteria. Always clean this product thoroughly after use.

Properties	Units	ASTM	Nominal Values
Density	g/cm ³	D792	0.77
Tensile Strength @ Yield	psi	D638	>3,300
Tensile Modulus	psi	D638	165,000
Elongation @ Yield	%	D638	9.6
Flexural Modulus	psi	D790	130,000
Flexural Stress @ 5% Strain	psi	D790	2,990
Compressive Properties 10% Strain	psi	D695	2,910
Durometer	Shore D	D2240	64.9
Izod Impact Resistance	ft.lbs./in. ²	D256	1.4
Heat Deflection Temp. 66 psi	°C (°F)	D648	87°C (188°F)
Screw Holding Strength	lbs	D1761	325

All values are determined on specimens prepared according to ASTM.

Nominal values should not be interpreted as specifications.

King StarBoard® XL is made entirely from FDA and USDA approved material.



King Plastic Corporation

Our Innovation. Your Imagination.®

1100 N. Toledo Blade Blvd. | North Port, FL 34288 USA

P: 941.493.5502 | F: 941.497.3274 | www.kingplastic.com



MADE IN USA



Architectural Products



The Polymer Building Sheet That Lasts a Lifetime

King StarBoard® ST is a unique and advanced, high-density polyethylene building sheet that lasts a lifetime. The polymer sheet is 25% stiffer than the original King StarBoard®. It is a product of a proprietary process called K-Stran™, the most advanced manufacturing process for superior flatness and consistency. King StarBoard® ST has a matte gloss finish on both sides of the sheet. It is environmentally stabilized to withstand the harshest outdoor conditions. King StarBoard® ST will not rust, delaminate or rot when exposed to UV, humidity or water. It is one of our most scratch-resistant polymers, making it an excellent construction material for cabinetry, furniture and architectural partitions. The polymer sheet never needs painting or refinishing, works like wood and is easy to fabricate using common woodworking tools and techniques.

King StarBoard® ST XL is available in a lighter version as a custom product. King StarBoard® ST XL sheets are up to 30% lighter in weight than King StarBoard® ST and are made with the same textured surface and colors for a perfect match.

King StarBoard® ST is upgradable to King MicroShield® with an advanced antimicrobial technology for protecting the product surface against stain and odor causing bacteria, algae and fungi.*

King StarBoard® ST is upgradable with King FlameShield, for ASTM E-84 Class A Flame Compliance and CAN/ULC-S102 for Canadian Compliance.

For more information about King MicroShield® and King FlameShield, please visit www.kingplastic.com

KING STARBOARD® ST

Applications

- Concession Stands
- Dugout Areas in Sports Arenas
- Furniture
- Healthcare Case Goods and Equipment
- Indoor and Outdoor Cabinets
- Kick Plates
- Lockers
- Outdoor Kitchens
- Playgrounds
- Pool Areas
- Tabletops and Counter

Specifications

Standard Sheet Size

in: 48" x 96"

mm: 1219 mm x 2438 mm

Standard Gauges

in: 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1-1/2"

mm: 6.4 mm | 9.53 mm | 12.7 mm | 19 mm | 25.4 mm | 38 mm

Approximate Weight

lbs: 40 lbs | 60 lbs | 80 lbs | 120 lbs | 160 lbs | 240 lbs

kg: 18.14 kg | 27.2 kg | 36.3 kg | 54.4 kg | 72.5 kg | 108.8 kg

Tolerance information: Gauges 1/4" up to 1-1/2" $\pm$ 5%
Length and width plus only at room temperature

Custom sheet sizes, gauges, and colors available upon request

Standard Colors



Black



Mocha Brown



Nutmeg



Indigo



Charcoal Gray




Slate Gray




Dolphin Gray



Sansshade



Seafoam



White/White

Note: Color accuracy can vary considerably on computer monitors and printers. Please consult your distributor for a product sample before making critical color choices. Disclaimer: King MicroShield® may affect color. King FlameShield may affect finish and color.

*For bacteriostatic, fungistatic, & algistatic properties. This product is exempt from registration under 40 CFR 152.25(a). King MicroShield® effectiveness verified by ISO and ASTM standards. This product does not protect users or others from disease-causing bacteria. Always clean this product thoroughly after use.

Properties	Units	ASTM	Nominal Values
Density	g/cc	D1505	0.963
Tensile Strength @ Yield	psi	D638	>4,500
Tensile Modulus	psi	D638	318,000
Elongation @ Break	%	D638	>600
Elongation @ Yield	%	D638	8.8
Flexural Modulus	psi	D790	225,000
Flexural Stress @ 5% Strain	psi	D790	4,480
Compressive Properties 10% Strain	psi	D695	4,790
Durometer	Shore D	D2240	69
Tensile Impact	ft.lbs./in. ²	D1822	99
Izod Impact Resistance	ft.lbs./in. ²	D256	1.4
Brittleness Temp.	°C (°F)	D746	<-75°C (<-103°F)
Vicat Softening Temp.	°C (°F)	D1525	132°C (270°F)
Heat Deflection Temp. 66 psi	°C (°F)	D648	84°C (183°F)
Screw and Nail Withdrawal	lbs	D1761	755 & 55
Flammability	Rating	UL94	HB

All values are determined on specimens prepared according to ASTM standards.

Nominal values should not be interpreted as specifications.

King StarBoard® ST is made entirely from FDA and USDA approved material.

King StarBoard® ST meets ASTM D4976.

King StarBoard® ST contains no VOC's.



King Plastic Corporation

Our Innovation. Your Imagination.®

1100 N. Toledo Blade Blvd. | North Port, FL 34288 USA

P: 941.493.5502 | F: 941.497.3274 | www.kingplastic.com



MADE IN USA



Outdoor Living



The All-Weather Wood Grain Polymer Sheet

King StarBoard® WG is a high-density polyethylene sheet with a wood grain finish. It is the product of a proprietary process called K-Stran™, the most advanced manufacturing process for superior flatness and consistency. King StarBoard® WG has a wood grain finish on both sides of the sheet. It is environmentally stabilized to withstand the harshest outdoor conditions. King StarBoard® WG will not rust, delaminate or rot when exposed to UV, humidity or water. It is ideal for a variety of applications from replacing wood, to building furniture. The wood grain polymer sheet never needs painting or refinishing, works like wood, and is easy to fabricate with common woodworking tools and techniques.

King Plastic pioneered King StarBoard®, the original marine-grade polymer sheet. Now, we deliver the highest performance and durability in our new wood grain plastic sheet King StarBoard® WG with elegance and casual sophistication for outdoor living. King StarBoard® WG, the all-weather wood grain polymer sheet inspiring everyone to live outdoors.

King StarBoard® WG is upgradable to King MicroShield® with an advanced antimicrobial technology for protecting the product surface against stain and odor causing bacteria, algae and fungi.*

King StarBoard® WG is upgradable with King FlameShield, for ASTM E-84 Class A Flame Compliance and CAN/ULC-S102 for Canadian Compliance.

For more information about King MicroShield® and King FlameShield, please visit www.kingplastic.com

KING
STARBOARD® WG

Applications

- Fire Pits
- Indoor and Outdoor Cabinets
- Outdoor Cabinetry & Storage
- Outdoor Furniture
- Planters
- Tabletops
- Boat Components

Specifications

Standard Sheet Sizes

in: 48" x 96"
mm 1219 mm x 2438 mm

Standard Gauges

in: 1/2" | 3/4"
mm: 12.7 mm | 19 mm

Approximate Weight 48" x 96"

lbs: 80 lbs | 120 lbs
kg: 36.3 kg | 54.4 kg

Tolerance information: Gauges 1/4" up to 1-1/2" $\pm$ 5%
 Length and width plus only at room temperature

Custom sheet sizes, gauges, and colors available

Standard Colors



Note: Color accuracy can vary considerably on computer monitors and printers. Please consult your distributor for a product sample before making critical color choices. Disclaimer: King MicroShield® may affect color. King FlameShield may affect finish and color.

*For bacteriostatic, fungistatic, & algistatic properties. This product is exempt from registration under 40 CFR 152.25(a). King MicroShield® effectiveness verified by ISO and ASTM standards. This product does not protect users or others from disease-causing bacteria. Always clean this product thoroughly after use.

Properties	Units	ASTM	Nominal Values
Density	g/cc	D1505	0.955
Tensile Strength @ Yield	psi	D638	>4,100
Tensile Modulus	psi	D638	255,000
Elongation @ Break	%	D638	>600
Elongation @ Yield	%	D638	9.8
Flexural Modulus	psi	D790	185,000
Flexural Stress @ 5% Strain	psi	D790	3,810
Compressive Properties 10% Strain	psi	D695	4,950
Durometer	Shore D	D2240	68
Tensile Impact	ft.lbs./in. ²	D1822	115
Izod Impact Resistance	ft.lbs./in. ²	D256	1.1
Brittleness Temp.	°C (°F)	D746	<-76°C (<-105°F)
Vicat Softening Temp.	°C (°F)	D1525	123°C (253°F)
Heat Deflection Temp. 66 psi	°C (°F)	D648	75°C (167°F)
Screw and Nail Withdrawal	lbs	D1761	657 & 63
Flammability	Rating	UL94	HB

All values are determined on specimens prepared according to ASTM standards.

Nominal values should not be interpreted as specifications.

King StarBoard® WG is made entirely from FDA and USDA approved material.

King StarBoard® WG meets ASTM D4976. | The raw material used to make King StarBoard® WG does not contain BPA's or Phthalates.



King Plastic Corporation

Our Innovation. Your Imagination.®

1100 N. Toledo Blade Blvd. | North Port, FL 34288 USA
P: 941.493.5502 | **F:** 941.497.3274 | www.kingplastic.com





Recreational Products



The Colorful Environmentally Stabilized Polymer Sheet

King ColorBoard® is a colorful environmentally stabilized high-density polyethylene sheet. It is the product of a proprietary process called K-Stran™, the most advanced manufacturing process for superior flatness and consistency. King ColorBoard® has a matte finish on both sides of sheet. It is environmentally stabilized to withstand the harshest outdoor conditions. King ColorBoard® will not rust, delaminate or rot when exposed to UV, humidity or water. The material is versatile, durable and colorfast for the competitive edge you're looking for. Its bright, primary colors make it ideal for sign, industrial, marine, playground and recreational applications. For maximum versatility, standard colors are made to coordinate with King ColorCore®. The polymer sheet never needs painting or refinishing, works like wood and it is easy to fabricate using common woodworking tools and techniques.

King ColorBoard® is upgradable to King MicroShield® with advanced antimicrobial technology for protecting the product surface against stain and odor causing bacteria, algae and fungi.*

King ColorBoard® is upgradable with King FlameShield for ASTM E-84 Class A Flame Compliance and CAN/ULC-S102 for Canadian Compliance.

For more information about King MicroShield® and King FlameShield, please visit www.kingplastic.com

**KING
COLORBOARD®**

Applications

- Children's Furniture
- Hospitals
- Museums
- Parks and Recreation
- School Equipment
- Theme Parks

Specifications

Standard Sheet Size

in: 48" x 96"

mm: 1219 mm x 2438 mm

Standard Gauges

in: 1/4" | 1/2" | 3/4"

mm: 6.4 mm | 12.7 mm | 19 mm

Approximate Weight

lbs: 40 lbs | 80 lbs | 120 lbs

kg: 18.14 kg | 36.3 kg | 54.4 kg

Tolerance information: Gauges 1/4" up to 3/4" $\pm$ 5%
Length and width plus only at room temperature

Custom sheet sizes, gauges, and colors available

Standard Colors



KPG Blue



KPG Green



KPG Red



KPG Orange



KPG Yellow



KPG Tan

Note: Color accuracy can vary considerably on computer monitors and printers. Please consult your distributor for a product sample before making critical color choices. Disclaimer: King MicroShield® may affect color. King FlameShield may affect finish and color.

*For bacteriostatic, fungistatic, & algistatic properties. This product is exempt from registration under 40 CFR 152.25(a). King MicroShield® effectiveness verified by ISO and ASTM standards. This product does not protect users or others from disease-causing bacteria. Always clean this product thoroughly after use.

Properties	Units	ASTM	Nominal Values
Density	g/cc	D1505	0.955
Tensile Strength @ Yield	psi	D638	>4,100
Tensile Modulus	psi	D638	255,000
Elongation @ Break	%	D638	>600
Elongation @ Yield	%	D638	9.8
Flexural Modulus	psi	D790	185,000
Flexural Stress @ 5% Strain	psi	D790	3,810
Compressive Properties 10% Strain	psi	D695	4,950
Durometer	Shore D	D2240	68
Tensile Impact	ft.lbs./in. ²	D1822	115
Izod Impact Resistance	ft.lbs./in. ²	D256	1.1
Brittleness Temp.	°C (°F)	D746	<-76°C (<-105°F)
Vicat Softening Temp.	°C (°F)	D1525	123°C (253°F)
Heat Deflection Temp. 66 psi	°C (°F)	D648	75°C (167°F)
Screw and Nail Withdrawal	lbs	D1761	657 & 63
Flammability	Rating	UL94	HB

All values are determined on specimens prepared according to ASTM standards.

Nominal values should not be interpreted as specifications.

King ColorBoard® is made entirely from FDA and USDA approved material.

King ColorBoard® meets ASTM D4976.

The raw material used to make King ColorBoard® does not contain BPA's or Phthalates.



King Plastic Corporation

Our Innovation. Your Imagination.®

1100 N. Toledo Blade Blvd. | North Port, FL 34288 USA

P: 941.493.5502 | F: 941.497.3274 | www.kingplastic.com



MADE IN USA



Engraving Products



The Multi-Color Engravable Polymer Sheet

King ColorCore® is a versatile multi-color engravable high-density polyethylene sheet with multiple layers of contrasting colors. It is a superior homogeneous sheet, a product of a unique state-of-the-art continuous process called Polyfusion, and manufactured to the highest standards in the industry. King ColorCore® has a matte finish on both sides of the sheet. It is environmentally stabilized to withstand the harshest outdoor conditions. King ColorCore® will not rust, delaminate or rot when exposed to UV, humidity or water. King ColorCore® is made with high-impact-resistant polymer to handle more abuse than conventional sign materials. Its thin cap layers and bright primary colors make it ideal for signage, marine, playground and recreational applications. For maximum versatility, standard colors are made to coordinate with King ColorBoard®. The polymer sheet never needs painting or refinishing, works like wood and it is easy to fabricate using common woodworking tools and techniques. The material is easy to engrave and machine, as the cap is approximately .050" thick.

King ColorCore® is upgradable to King MicroShield® with an advanced antimicrobial technology for protecting the product surface against stain and odor causing bacteria, algae and fungi.*

For more information about King MicroShield®, please visit www.kingplastic.com

KING
COLORCORE®

Applications

- Architectural Applications
- Carnival Games
- Children's Furniture
- Furniture
- Marine Applications
- Museums
- Picnic Tables
- Point-of-Purchase Displays
- Signage and Wayfinding

Specifications

Standard Sheet Size

in: 48" x 96"

mm: 1219 mm x 2438 mm

Standard Gauges

in: 1/4" | 1/2" | 3/4"

mm: 6.4 mm | 12.7 mm | 19 mm

Approximate Weight

lbs: 40 lbs | 80 lbs | 120 lbs

kg: 18.14 kg | 36.3 kg | 54.4 kg

Cap thickness is .050" for both sides of the material

Tolerance information: Gauges 1/4" up to 3/4" $\pm$ 5%
Length and width plus only at room temperature

Custom sheet sizes, gauges, and colors available

Standard Colors



Blue/White/Blue



White/Blue/White



Red/White/Red



White/Red/White



Red/Black/Red



Black/Red/Black



Green/White/Green



White/Green/White



Green/Tan/Green



Tan/Green/Tan



Yellow/Black/Yellow



Black/Yellow/Black



Brown/Tan/Brown



Tan/Brown/Tan



Brown/White/Brown



White/Brown/White



Black/White/Black



White/Black/White

Note: Color accuracy can vary considerably on computer monitors and printers. Please consult your distributor for a product sample before making critical color choices. Disclaimer: King MicroShield® may affect color.

*For bacteriostatic, fungistatic, & algistatic properties. This product is exempt from registration under 40 CFR 152.25(a). King MicroShield® effectiveness verified by ISO and ASTM standards. This product does not protect users or others from disease-causing bacteria. Always clean this product thoroughly after use.

Properties	Units	ASTM	Nominal Values
Density	g/cc	D1505	0.955
Tensile Strength @ Yield	psi	D638	>4,100
Tensile Modulus	psi	D638	255,000
Elongation @ Break	%	D638	>600
Elongation @ Yield	%	D638	9.8
Flexural Modulus	psi	D790	185,000
Flexural Stress @ 5% Strain	psi	D790	3,810
Compressive Properties 10% Strain	psi	D695	4,950
Durometer	Shore D	D2240	68
Tensile Impact	ft.lbs./in. ²	D1822	115
Izod Impact Resistance	ft.lbs./in. ²	D256	1.1
Brittleness Temp.	°C (°F)	D746	<-76°C (<-105°F)
Vicat Softening Temp.	°C (°F)	D1525	123°C (253°F)
Heat Deflection Temp. 66 psi	°C (°F)	D648	75°C (167°F)
Screw and Nail Withdrawal	lbs	D1761	657 & 63
Flammability	Rating	UL94	HB

All values are determined on specimens prepared according to ASTM standards. Nominal values should not be interpreted as specifications.

King ColorCore® is made entirely from FDA and USDA approved material.

King ColorCore® meets ASTM D4976. The raw material used to make King ColorCore® does not contain BPA's or Phthalates.



King Plastic Corporation

Our Innovation. Your Imagination.®

1100 N. Toledo Blade Blvd. | North Port, FL 34288 USA

P: 941.493.5502 | F: 941.497.3274 | www.kingplastic.com



MADE IN USA



King Performance Commodity High-Density Polyethylene

King KPC HDPE is a high-density polyethylene material. It is the product of a proprietary process called K-Stran™, the most advanced manufacturing process for superior flatness and consistency for gauges up to 1 -1/2" thick. Larger gauges are manufactured in our state-of-the-art compression mold or extrusion mold. King KPC HDPE has a natural, smooth gloss finish on both sides of the sheet. It is extremely versatile with outstanding properties and good chemical resistance for a wide variety of applications at a very competitive cost. King KPC HDPE natural is FDA and USDA approved material that can be used for food containers and food equipment.* The material is easy to machine and fabricate.

King KPC HDPE is upgradable to King MicroShield® with an advanced antimicrobial technology for protecting the product surface against stain and odor causing bacteria, algae and fungi.**

King KPC HDPE is upgradable with King FlameShield, for ASTM E-84 Class A Flame Compliance and CAN/ULC-S102 for Canadian Compliance.

For more information about King MicroShield® and King FlameShield, please visit those product pages.

Applications

- Brush Blocks
- Containment Tanks
- Livestock Containment
- Material Handling Systems
- Machined Parts
- Skating Rinks
- Wear Strips

Specifications

Standard Sheet Size

in: 48" x 96"

mm: 1219 mm x 2438 mm

*This product does not protect users or others against foodborne bacteria. Always clean this product thoroughly after each use.

**For bacteriostatic, fungistatic, & algistatic properties. This product is exempt from registration under 40 CFR 152.25(a). King MicroShield® effectiveness verified by ISO and ASTM standards. This product does not protect users or others from disease-causing bacteria. Always clean this product thoroughly after use.

Standard Colors



Natural

Note: Color accuracy can vary considerably on computer monitors and printers. Please consult your distributor for a product sample before making critical color choices.

Disclaimer: King MicroShield® may affect color.

King FlameShield may affect finish and color.

Standard Gauges

in:	1/8"	3/16"	1/4"	3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"
mm:	3.18 mm	4.76 mm	6.35 mm	9.53 mm	12.7 mm	15.88 mm	19.05 mm	25.4 mm	31.75 mm	38 mm

in:	1-3/4"	2"	2-1/4"	2-1/2"	3"	4"
mm:	44.75 mm	50.8 mm	57.15 mm	63.5 mm	76.2 mm	101.6 mm

Approximate Weight

lbs:	20 lbs	30 lbs	40 lbs	60 lbs	80 lbs	100 lbs	120 lbs	160 lbs	200 lbs	240 lbs
kg:	9 kg	13.6 kg	18 kg	26 kg	32 kg	45 kg	54.4 kg	72.5 kg	90.7 kg	109 kg

lbs:	280 lbs	320 lbs	360 lbs	400 lbs	480 lbs	640 lbs
kg:	127 kg	145.15 kg	163.29 kg	181.43 kg	217.7 kg	290 kg

Tolerance Information:

K-Stran™

Gauges 1/8" through 1-1/2" ± 5% | Length and width plus only at room temperature

Compression Molding

Gauges greater than 1" and under 1-1/2" ± 10% | Gauges 1-1/2" and greater plus only | Length and width plus only at room temperature

Note: HDPE Black gauges run from 1/8" through 1"

Custom thickness up to 25"/635 mm with our King Size Blocks and Massive Shapes

Custom sheet sizes, gauges and colors available

Properties	Units	ASTM	Nominal Values
Density	g/cc	D1505	0.955
Tensile Strength @ Yield	psi	D638	>4,100
Tensile Modulus	psi	D638	255,000
Elongation @ Break	%	D638	>600
Elongation @ Yield	%	D638	9.8
Flexural Modulus	psi	D790	185,000
Flexural Stress @ 5% Strain	psi	D790	3,810
Compressive Properties 10% Strain	psi	D695	4,950
Durometer	Shore D	D2240	68
Tensile Impact	ft.lbs./in. ²	D1822	115
Izod Impact Resistance	ft.lbs./in. ²	D256	1.1
Brittleness Temp.	°C (°F)	D746	<-76°C (<-105°F)
Vicat Softening Temp.	°C (°F)	D1525	123°C (253°F)
Heat Deflection Temp. @ 66 psi	°C (°F)	D648	75°C (167°F)
Screw and Nail Withdrawal	lbs	D1761	657 & 63

All values are determined on specimens prepared according to ASTM. | Nominal values should not be interpreted as specifications. | King KPC HDPE is made entirely from FDA and USDA approved material. | King KPC HDPE meets ASTM D4976.



King Plastic Corporation

Our Innovation. Your Imagination.®

1100 N. Toledo Blade Blvd. | North Port, FL 34288 USA

P: 941.493.5502 | F: 941.497.3274 | www.kingplastic.com



MADE IN USA

Specifications

Standard Sheet Size

in: 60" x 96"

mm: 1524 mm x 2438 mm

Standard Gauges

in: 1/4" | 3/8" | 1/2" | 3/4"

mm: 6.4 mm | 9.53 mm | 12.7 mm | 19 mm

Approximate Weight

lbs: 40 lbs | 56 lbs | 72 lbs | 108 lbs

kg: 18.14 kg | 25.4 kg | 32.6 kg | 49 kg

Tolerance information: Gauges 1/4" up to 3/4" $\pm$ 5%
Length and width plus only at room temperature

Custom sheet sizes and gauges available

Standard Colors



Utility Black



Utility Gray



Utility White

Note: Color accuracy can vary considerably on computer monitors and printers.
Please consult your distributor for a product sample before making critical color choices.
Disclaimer: King MicroShield® may affect color.

*For bacteriostatic, fungistatic, & algistatic properties. This product is exempt from registration under 40 CFR 152.25(a). King MicroShield® effectiveness verified by ISO and ASTM standards. This product does not protect users or others from disease-causing bacteria. Always clean this product thoroughly after use.

Properties	Units	ASTM	Nominal Values
Density	g/cm ³	D792	*0.77 & 0.7187
Tensile Strength @ Yield	psi	D638	>3,300
Tensile Modulus	psi	D638	165,000
Elongation @ Yield	%	D638	9.6
Flexural Modulus	psi	D790	130,000
Flexural Stress @ 5% Strain	psi	D790	2,990
Compressive Properties 10% Strain	psi	D695	2,910
Durometer	Shore D	D2240	64.9
Izod Impact Resistance	ft.lbs./in. ²	D256	1.4
Heat Deflection Temp. 66 psi	°C (°F)	D648	87°C (188°F)
Screw Holding Strength	lbs	D1761	325
Flammability	Rating	UL94	HB

All values are determined on specimens prepared according to ASTM.

Nominal values should not be interpreted as specifications.

King StarLite® XL is made entirely from FDA and USDA approved material.

*Nominal value 0.77 density applies to 1/4" gauge only



King Plastic Corporation

Our Innovation. Your Imagination.®

1100 N. Toledo Blade Blvd. | North Port, FL 34288 USA

P: 941.493.5502 | F: 941.497.3274 | www.kingplastic.com



MADE IN USA