


## UNINTERRUPTIBLE POWER SUPPLY KIT

### PSH600-UPS

Kit Consisting of Enclosed Power Control Center Model PSH2RB10 (10 Amp Switch / Circuit Breaker, Two (2) 120 Vac Outlets, Terminals, 120 Vac Input) with a 600 VA UPS. **(No Status Contacts)**

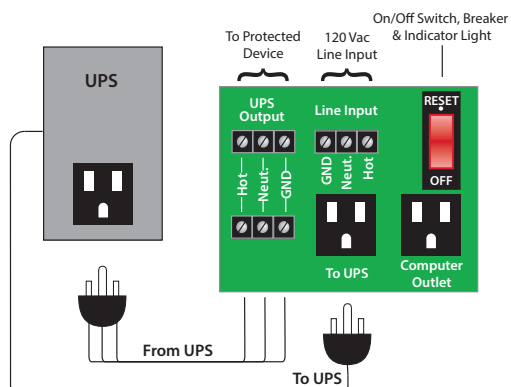

Shown  
Without  
Cover



Made in USA  
Meets  
"Buy American"  
of ARRA 2009

## SPECIFICATIONS

### UPS

UPS: 550 or 600VA

Backup Time: 2.5 Min. @ Full 600 VA Load

10 Min. @ 1/2 Load

Power Consumption Up to 3 Amp @120 Vac

Max Load: 330 Watt

Frequency: 50/60 Hz

Temperature Rating of UPS: 32 to 104° F

UPS Transfer Time: 6ms

Approvals: UL Listed, UL1778

### PSH2RB10

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Main Breaker ON/OFF: Switch / Breaker (10 Amp)

Approvals: UL Listed, UL916, C-UL, CE, RoHS

Dimensions: 12.000" x 14.000" x 6.000"

Metal Housing with Screw Cover

Weight: 12 lbs.

Shipping Weight:

23.3 lbs.

Product Weight:

20.5 lbs.

### Notes:

- To order without UPS, so that any other commercial UPS with appropriate ratings and within housing space limitations may be used, see model PSH2RB10.
- To order interface board for replacement or for separate use, order model PSM2RB10.
- Average battery life: 3-5 years depending on the number of discharge cycles and environmental temperature
- UPS may change based on quality and availability

## ESTIMATED BACKUP TIME VS. LOAD

