


BACnet PTEC Unit Conditioner
Controller

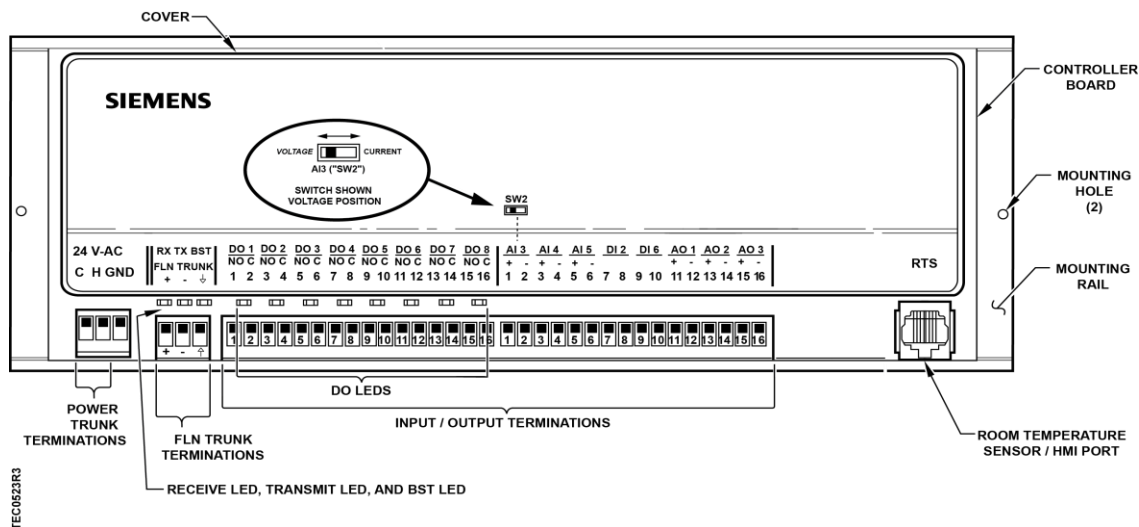

Generic Controller I/O Layout. See *Wiring Diagram* for application specific details.

Control Applications

6642 through 6648

Product Description

These instructions explain how to field install or replace a Siemens BACnet PTEC Unit Conditioner Controller - Electronic Output.

Warning/Caution Notation


	WARNING Personal injury/loss of life may occur if you do not follow the procedures as specified.
--	--

	CAUTION Equipment damage or loss of data may occur if you do not follow the procedures as specified.
--	--

Product Numbers

Siemens BACnet PTEC Unit
Conditioner Controller - Electronic
Output 550-496PA

Shipping carton includes a controller assembly, a mounting rail, and two self-tapping/drilling screws.

	CAUTION
	<p>Keep the unit in its static-proof bag until installation.</p> <p>Otherwise, you run the risk of damage to the printed circuit board from electrostatic discharge.</p>

- 24 Vac Class II power available.
- Supply power to the unit is OFF.
- Any application specific hardware or devices installed.



NOTE:

If the controller is being installed on a box with 1 or more stages of electric heat, the 550-809 MOV with pre-terminated spade connectors must be installed across the manufacturer-supplied airflow switch. MOVs can be installed at the time the controller is factory mounted; coordinate with the box manufacturer prior to order placement. For field installation, see *Metal Oxide Varistor Kit Installation Instructions* (540-986).



NOTE:

A low-cost temporary RTS (540-658P25) is available that plugs into the RTS port on the controller, providing temperature input and actual space control until a permanent RTS is installed.

Accessories

Low cost temporary temperature sensor, 10K thermistor with RJ11 (1" long), that enables space control if the permanent room or duct sensor is not installed (pack of 25). 540-658P25

Duct Temperature Sensor, NTC 10K QAM1030.008P50
 Q Type 2, 3" Probe for Commissioning only

Expected Installation Time

New controller installation	10 Minutes
Replacement (old controller has removable terminal blocks)	6 Minutes
Replacement (old controller does not have removable terminal blocks)	16 Minutes



NOTE:

You may require additional time for database work at the field panel.

Required Tools and Equipment

- Small flat-blade screwdriver (1/8-inch blade width)
- Cabling and connectors
- Cordless drill/driver set
- ESD wrist strap

Prerequisites

- Wiring conforms to NEC and local codes and regulations. For further information see the *Wiring Guidelines Manual* (125-3002).
- Room temperature sensor installed (optional).

Installation Instructions




NOTE:


All wiring must conform to national and local codes and regulations (NEC, CE, etc.).

1. Secure the mounting rail in the controller's desired location.
2. Place the ESD wrist strap on your wrist and attach it to a good earth ground.
3. Remove the controller from the static proof bag and snap it into place on the mounting rail.

4. Connect the FLN.
3-WIRE FLN TRUNK

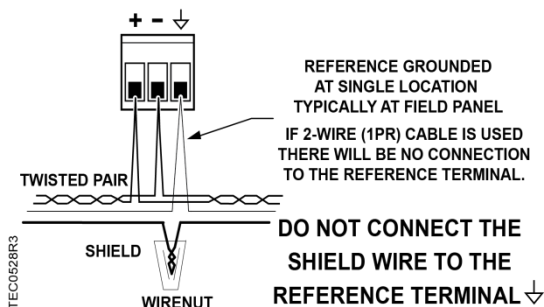

5. Connect the point wiring (see *Wiring Diagrams*).
6. Plug the room temperature sensor cable into the RTS port.
7. Connect the power trunk. DO NOT apply power to the controller without first consulting the specialist. This TEC is designed to work with 2-wire AC power (Neutral and Phase (hot) at 24 Vac +/-20%. Use of the earth terminal is optional and if used it should be connected to the nearest earth ground (building steel, conduit or duct work (if earthed)).)

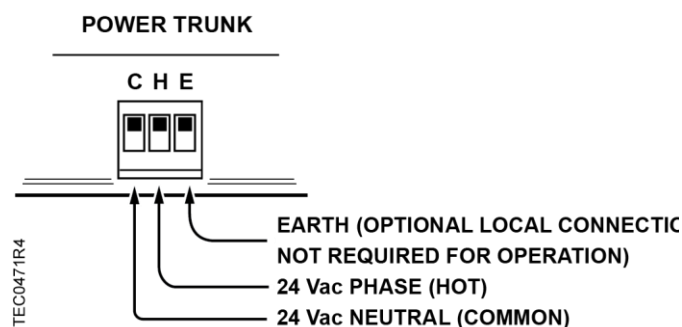


	CAUTION
	<p>It is very important that the neutral that supplies the TEC be earth grounded at the source of the 24 Vac power. Possible erratic equipment operation or damage if neutral is left floating.</p>

The installation is complete.

Wiring Diagram

	CAUTION
	<p>The controller's DOs control 24 Vac loads only. The maximum rating is 12 VA for each DO. An external interposing relay is required for any of the following:</p> <ul style="list-style-type: none"> • VA requirements higher than the maximum • 110 or 220 Vac requirements • DC power requirements • Separate transformers used to power the load (for example part number 540-147, Terminal Equipment Controller Relay Module)

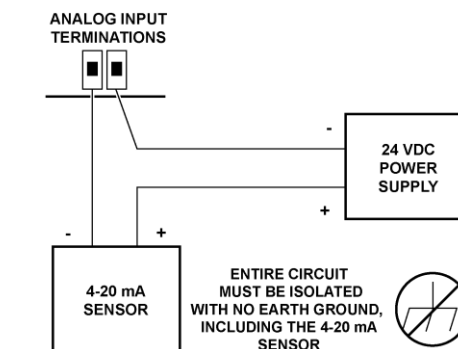


CAUTION:
Each 4-20 mA sensor requires a SEPARATE, dedicated power limited 24 VDC power supply. DO NOT use the same transformer to power both the sensor and controller.

Wiring for AI with a 4 to 20 mA Sensor.




NOTE:

If the voltage/current switch is set to current and a 4 to 20 mA sensor is connected to an AI, then special wiring requirements must be followed.

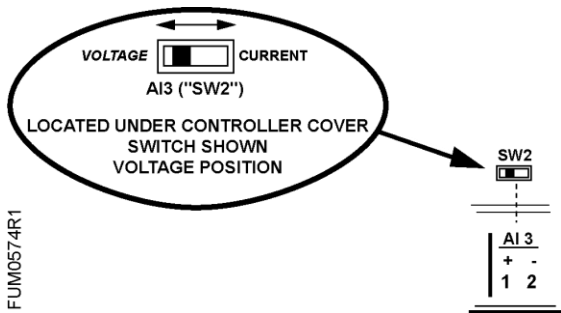


NOTE:
When wiring any actuator that uses a 0 to 10V control signal and ties AC neutral to DC common, an additional wire **must** connect the actuator AC neutral to the DC common of the PTEC/TEC AO being used to control the actuator.

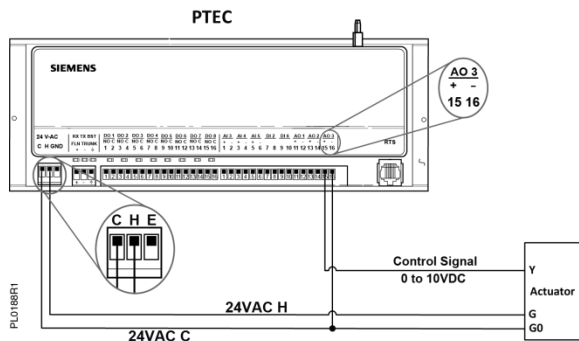


24 Vac Modulating Control.


Actuator Symbol	TEC Connection	Function	Terminal Connection	Standard Color
1	H	Supply (SP)	G	Red
2	C	Neutral (SN)	G0	Black
8	AO3 – 15 (+)	0 to 10V input signal	Y	Gray
--	C to AO3 16 (-)	Common jumper	--	--

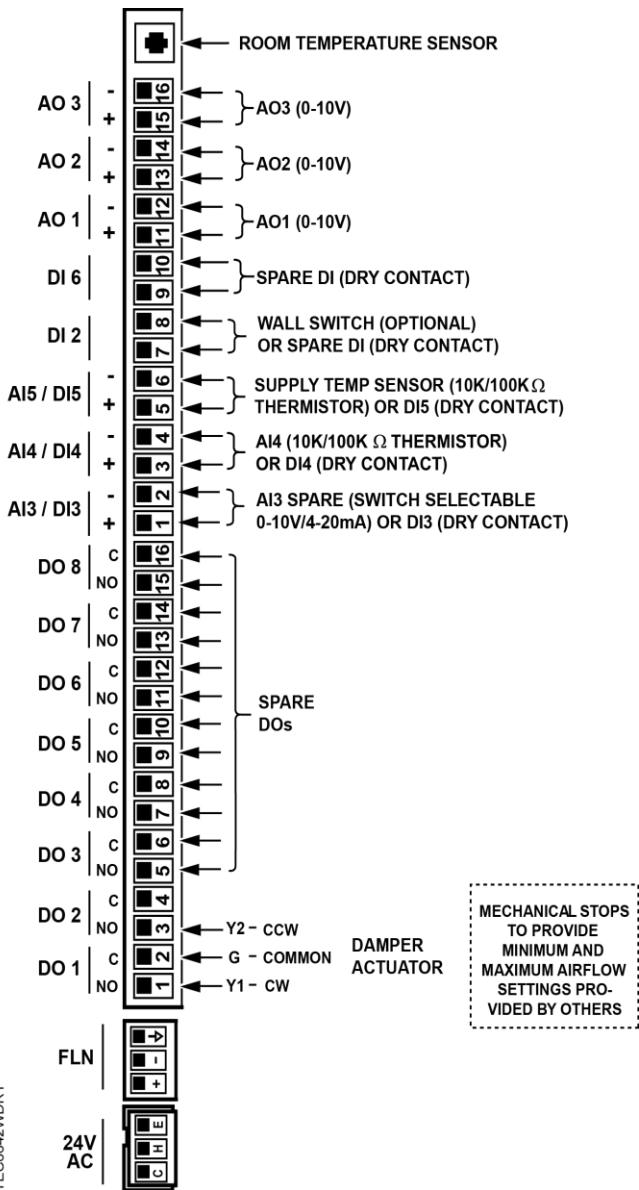


Application 6642 - Variable Air Volume Pressure Dependent Cooling or Heating.

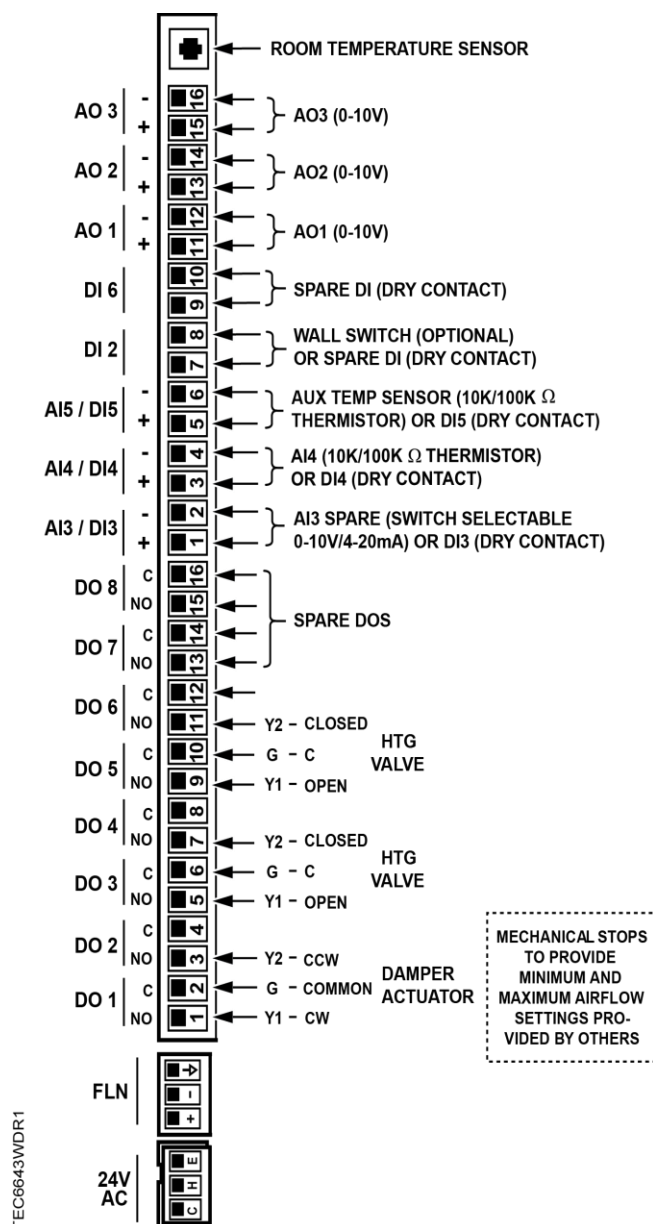


Application 6643 - Variable Air Volume Pressure Dependent with Hot Water Reheat.

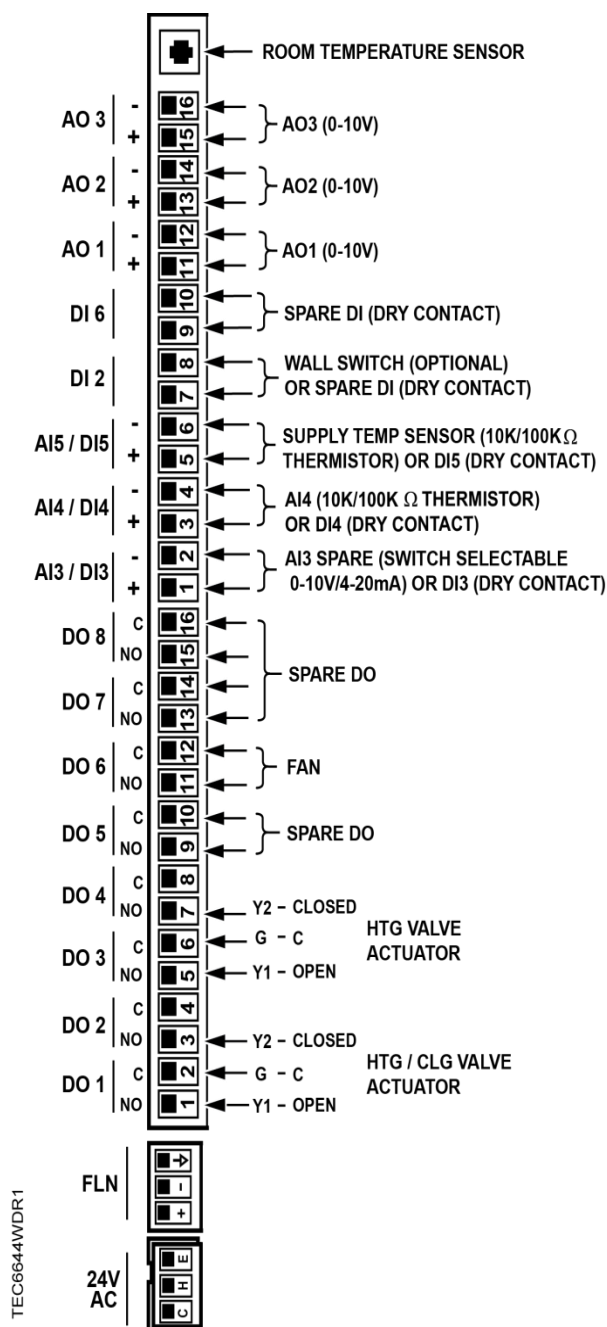


Application 6644 - Two-Pipe Fan Coil Unit Cooling or Heating.

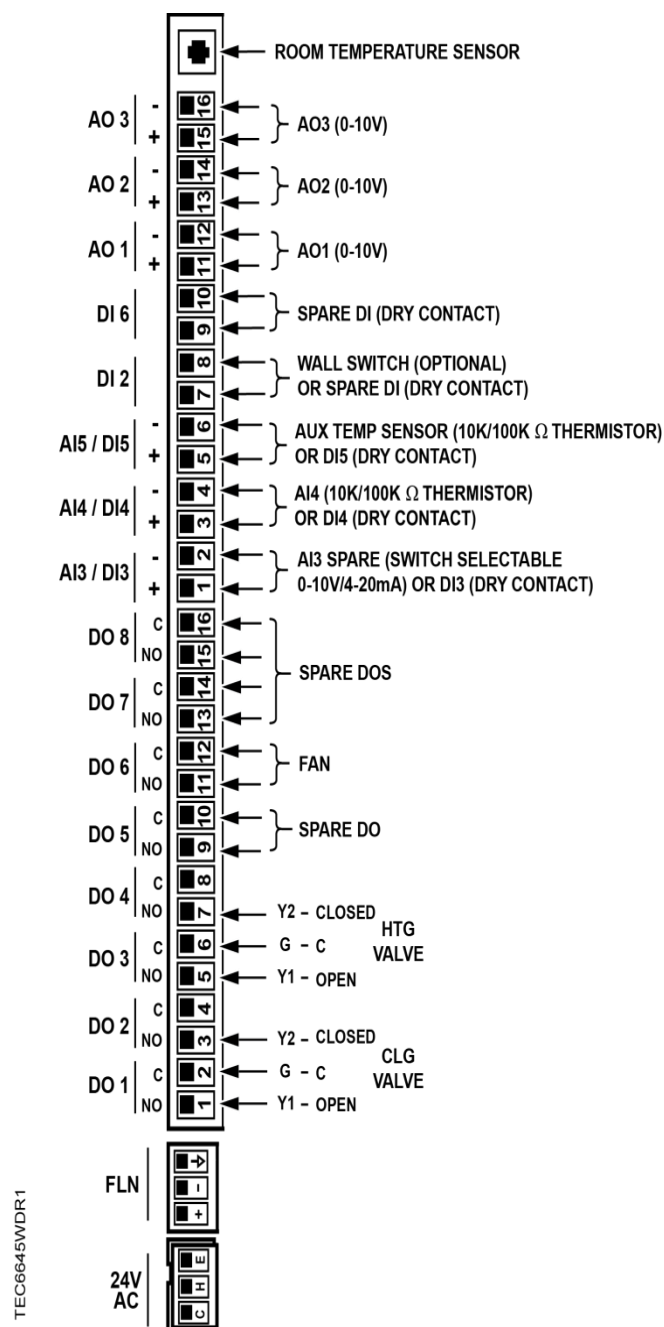


Application 6645 - Fan Coil Unit Cooling and Heating with Fan.

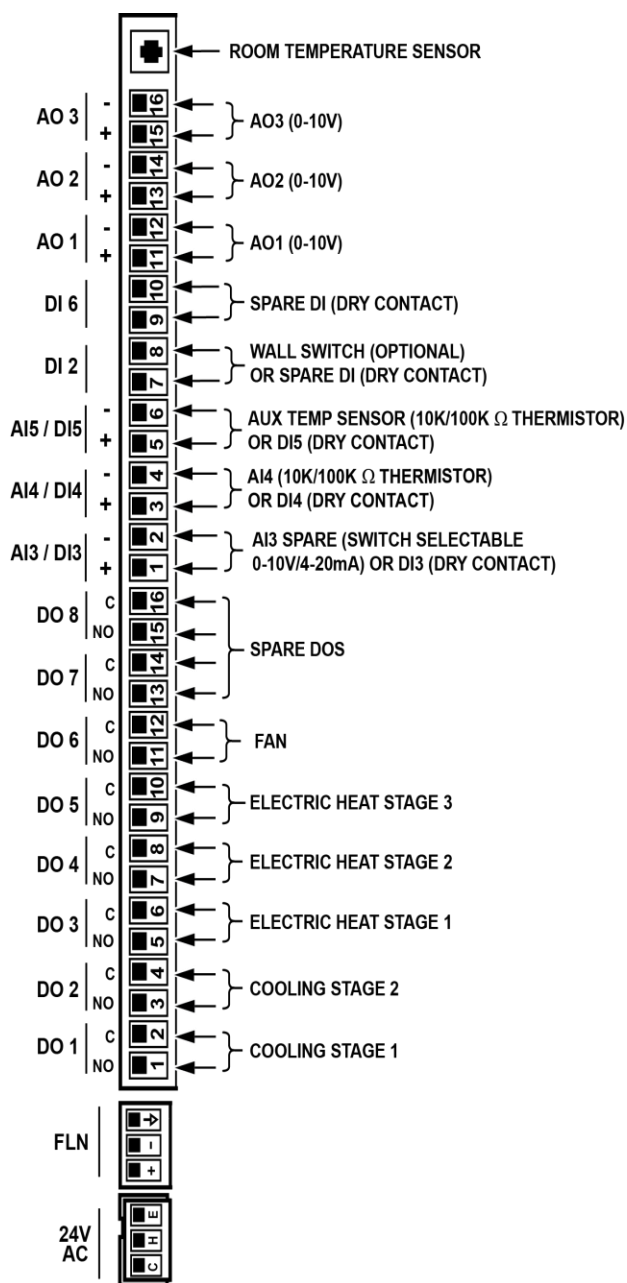

Application 6646 - Fan Coil Unit 2-Stage Cooling and Electric Heat.

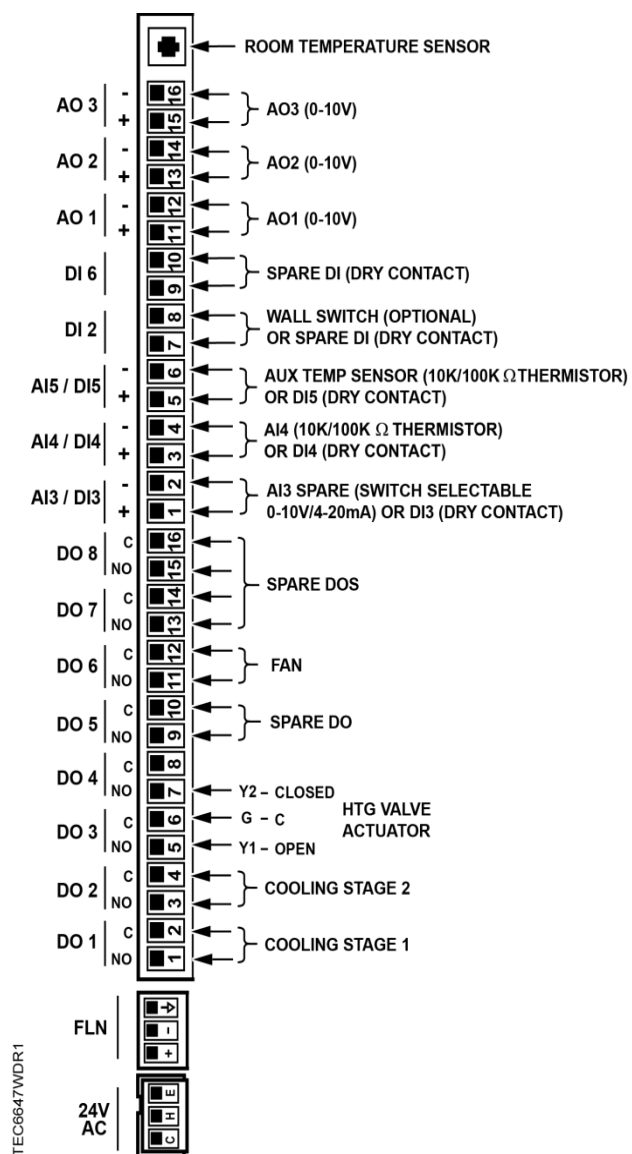

Application 6647 - Fan Coil Unit 2-Stage Cooling and Hot Water Heat.

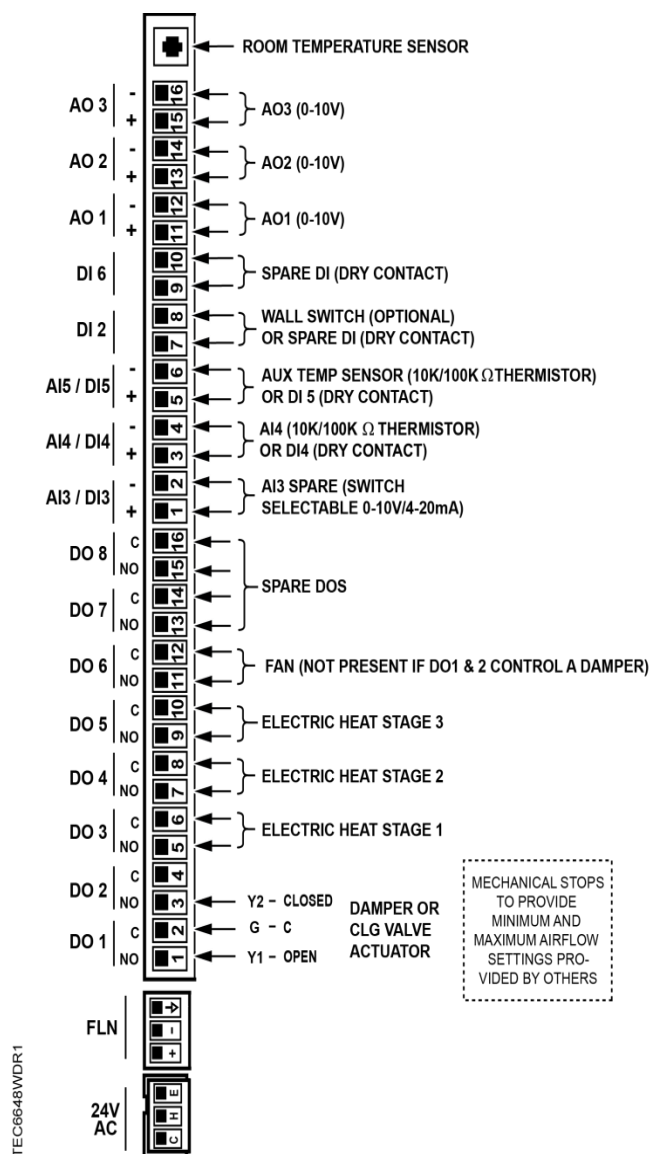

Application 6648 - Fan Coil Unit Cooling with Electric Heat.

Cyber security disclaimer

Products, solutions and services from Siemens include security functions to ensure the secure operation of building automation and control, fire safety, security management, and physical security systems. The security functions on these products, solutions and services are important components of a comprehensive security concept.

Drafting, implementing and managing a comprehensive and up-to-date security concept, customized to individual needs, is nevertheless necessary, and may result in additional plant- or site-specific preventive measures to ensure secure operation of your site regarding building automation and control, fire safety, security management, and physical security. These measures may include, for example, separating networks, physically protecting system components, user training, multi-level defensive measures, etc. For additional information on security as part of building technology and our product, solution and service offerings, please contact your Siemens sales representative or project department. We strongly recommend to always comply with our security advisories on the latest security threats, patches and other related measures. <http://www.siemens.com/cert/en/cert-security-advisories.htm>

Information in this document is based on specifications believed correct at the time of publication. The right is reserved to make changes as design improvements are introduced. Product or company names mentioned herein may be the trademarks of their respective owners. © 2016 Siemens Industry, Inc.

Siemens Industry, Inc.
Building Technologies Division
1000 Deerfield Parkway
Buffalo Grove, IL 60089-4513
USA
Tel. 1 + 847-215-1000

Your feedback is important to us. If you have comments about this document, please send them to SBT_technical.editor.us.sbt@siemens.com.

Document No.550-145
Printed in the USA
Page 8 of 8