

## OpenAir™ GNP/GAP Series, Fail-Safe/Fail-in-Place, 53 lb-in (6 Nm) Rotary, Electronic Damper Actuators

### Description

The OpenAir direct-coupled fail-safe/fail-in-place electronic actuators are designed for modulating, two-position, and floating control of laboratory fume hoods, constant or variable volume installations for the control of supply and exhaust air and terminal units.

### Product Numbers

Product Number	Auxiliary Switch	Fail-safe	Fail-in-Place
GNP191.1P		•	
GNP196.1P	•	•	
GAP191.1P			•
GAP196.1P	•		•

### Features

- Fast operation, 2 second runtime
- One model performing all control signals
  - 2-position control
  - Floating control
    - Accepts Siemens FHC/LRC pulsed control signal
  - Modulating control (0(2) to 10Vdc; 4 to 20 mA)
- Feedback is standard on all models
- Highly accurate positioning
  - Repositioning resolution 0.4%
- Brushless DC motor technology with stall protection.
- Unique self-centering shaft coupling
- 53 lb-in 6 (Nm) torque
- UL and cUL listed, CE certified
- 24 Vac/dc compatible
- Manual override capability

### Technical Data

Running torque:	53 lb-in (6 Nm)
Maximum torque:	142 lb-in (16 Nm)
Runtime for 90°:	2 sec. operating
Frequency:	50/60 Hz
Run time for 90°:	2 sec
Fail-safe on power loss (GNP19x only)	
Power consumption:	24 Vac/dc supply
Running:	28 VA/19W
Holding:	8 VA/5W



Equipment rating (24 Vac): Class 2 per UL/CSA  
 Angle of rotation: 90° nominal, 95° max.  
 Shaft dimensions: 1/4 to 3/4-inch (6.4 to 20.5 mm) dia.  
 1/4 to 1/2-inch (6.4 to 13 mm) sq.  
 Minimum shaft length: 3/4-inch (20 mm)

Operating temperature: 0°F to 122°F (-18°C to 50°C)  
 Storage temperature: -40°F to 158°F (-40°C to 70°C)  
 Transport temperature: -26°F to 158°F (-32°C to 70°C)

Ambient humidity: 95% rh (non-condensing)

Enclosure: NEMA 1  
 Precabled connection: 18 AWG, 3 ft (0.9 m) long

Agency listings:  
 UL listed UL 873  
 cUL listed C22.2 No. 24.93

**NOTE:** These devices were approved for installation in plenum areas by Underwriters Laboratories, Inc. (UL) per UL 1995.


Electromagnetic compatibility (EMC) 2004/108/EC

Material: Die-cast aluminum alloy  
 Gear lubrication: Silicone-free  
 Dimensions: 8-3/8" H x 3-1/4" W x 2-3/8" D  
 (212 mm H x 83 mm W x 60 mm D)  
 Shipping weight: 3 lbs 6 oz

## Typical Specifications


Fail-safe and fail-in-place damper actuators shall be the direct-coupled type that requires no connecting linkages. Feedback shall be standard on all models. These actuators shall be able to perform all control signals (2-position, floating and modulating [0(2) to 10 Vdc and 4 to 40 mA]). These actuators shall have a self-centering damper shaft coupling that assures concentric alignment of the actuator's output coupling with the damper shaft for 53 lb-in torque and be capable of direct mounting to a shaft up to a 3/4-inch in diameter both round and square shafts. Actuators shall provide stall protection throughout the full range of rotation. All actuators shall be capable of both clockwise and counterclockwise fail-safe and fail-in-place operation that returns the actuator to a fail-safe position in <2 seconds in response to a loss of power. All actuators shall provide a means of manually positioning the output coupling in the absence of power. Dual, independently adjustable auxiliary switches are available for these actuators. All actuators must be pre-cabled and provide an easily readable position indicator. All actuators shall be CE conforming; UL60730 (to replace UL873) and CSA22.2 listed and manufactured under ISO 9002 and ISO 14000 procedures. Actuators shall be as manufactured by Siemens Industry, Inc.

### Dimensions in Inches (Millimeters)

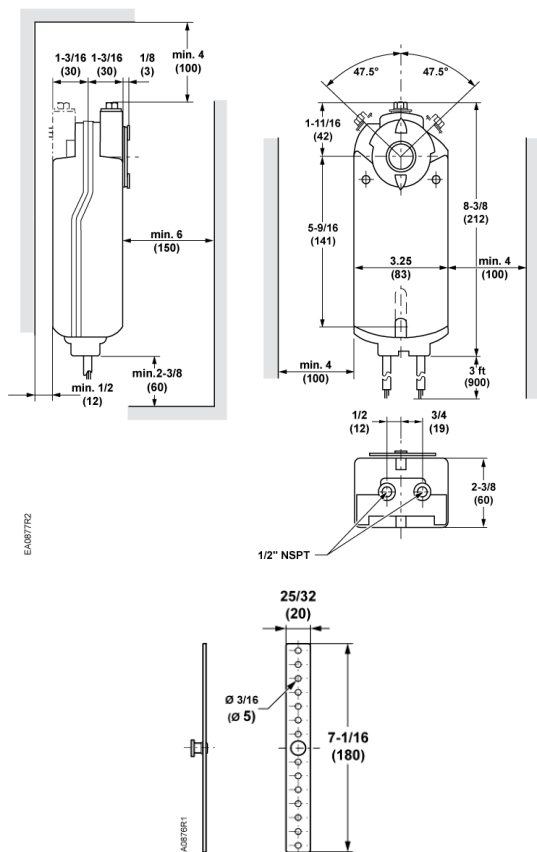


## Wiring Diagrams


## 2-Position

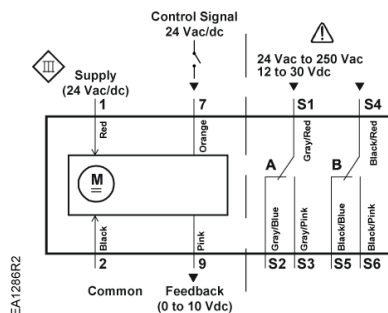

## Floating

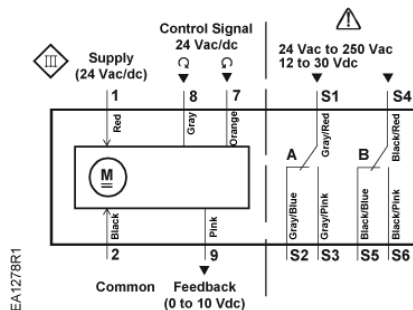

**Modulating; 0(2) to 10 Vdc, 4 to 20 mA.**

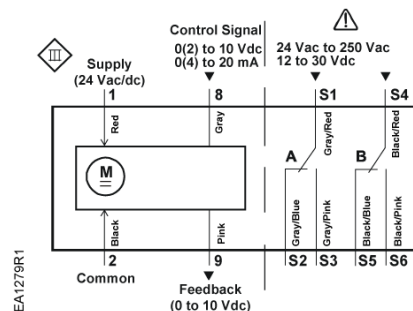

Information in this publication is based on current specifications. The company reserves the right to make changes in specifications and models as design improvements are introduced. OpenAir is a trademark of Siemens Schweiz AG. Other product or company names mentioned herein may be the trademarks of their respective owners. © 2017 Siemens Industry, Inc.