



Title		
Size	Number	Revision
A		
Date:	10/27/2016	Sheet of
File:	\\.\BMS.SchDoc	Drawn By:

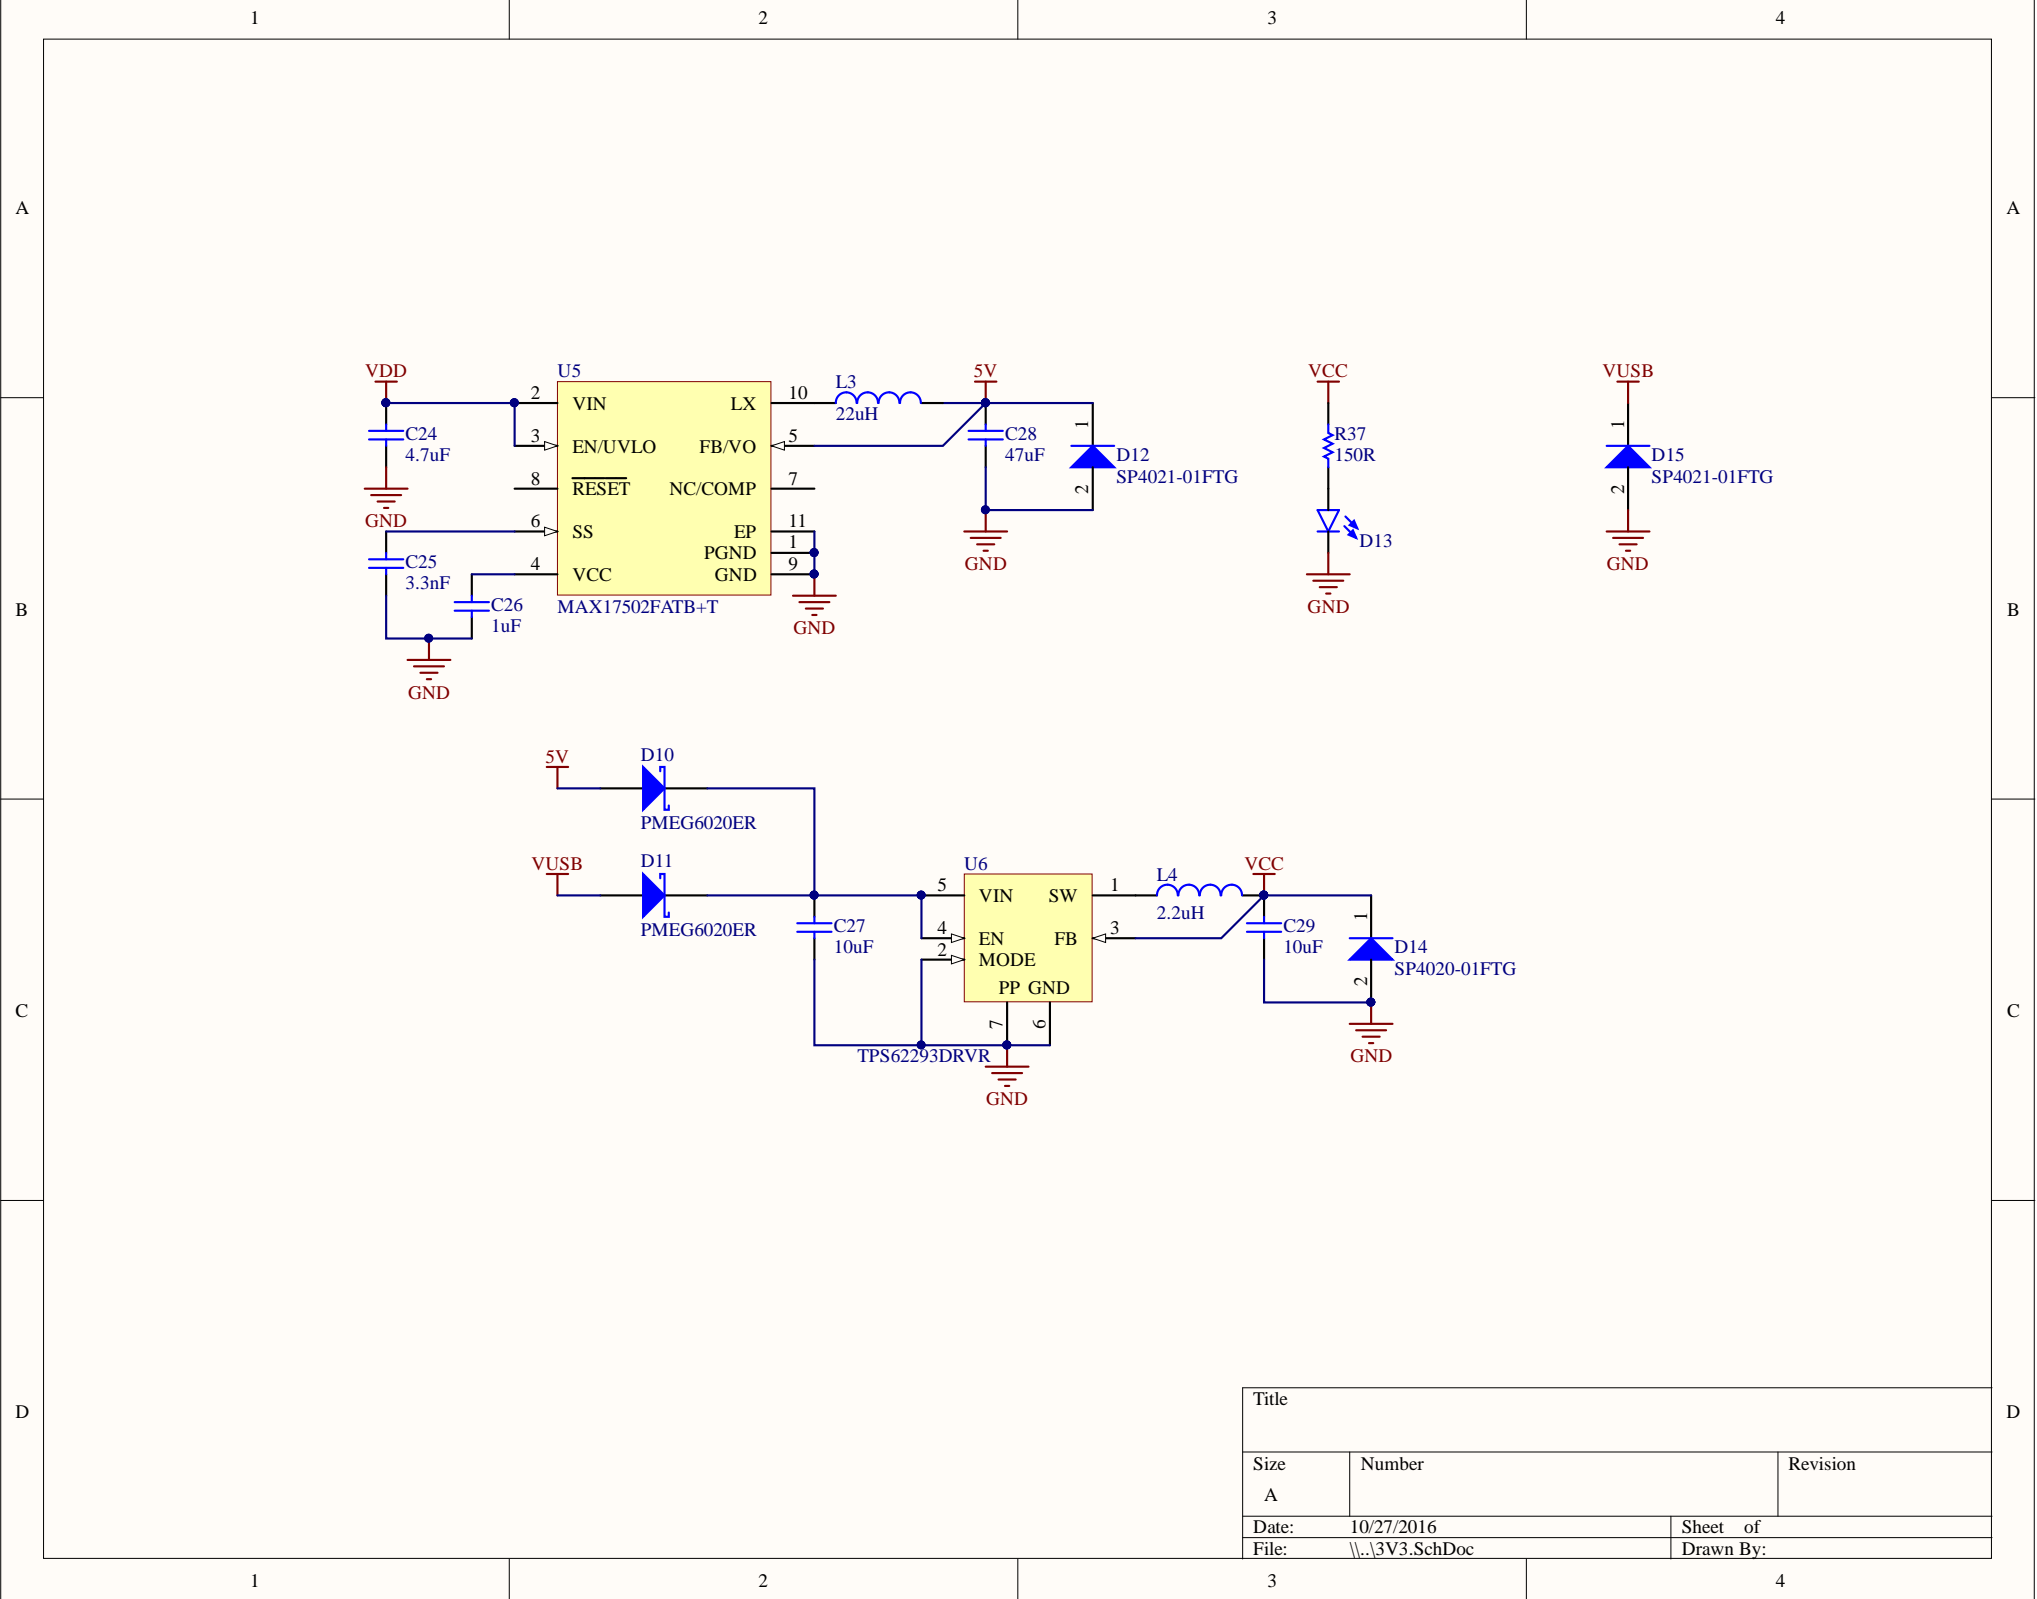


A

A

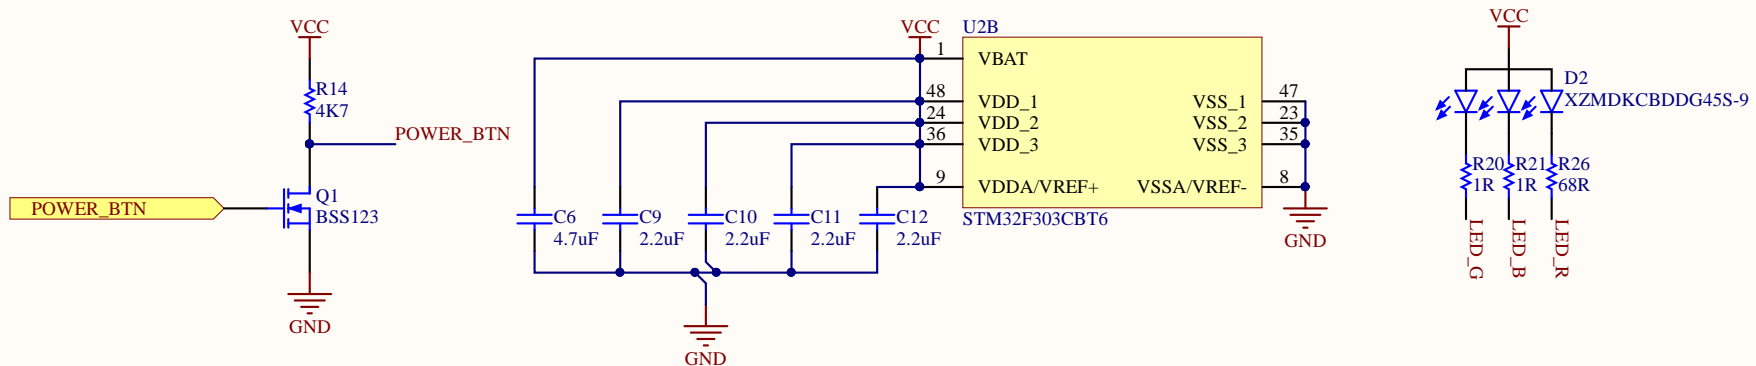

B

B

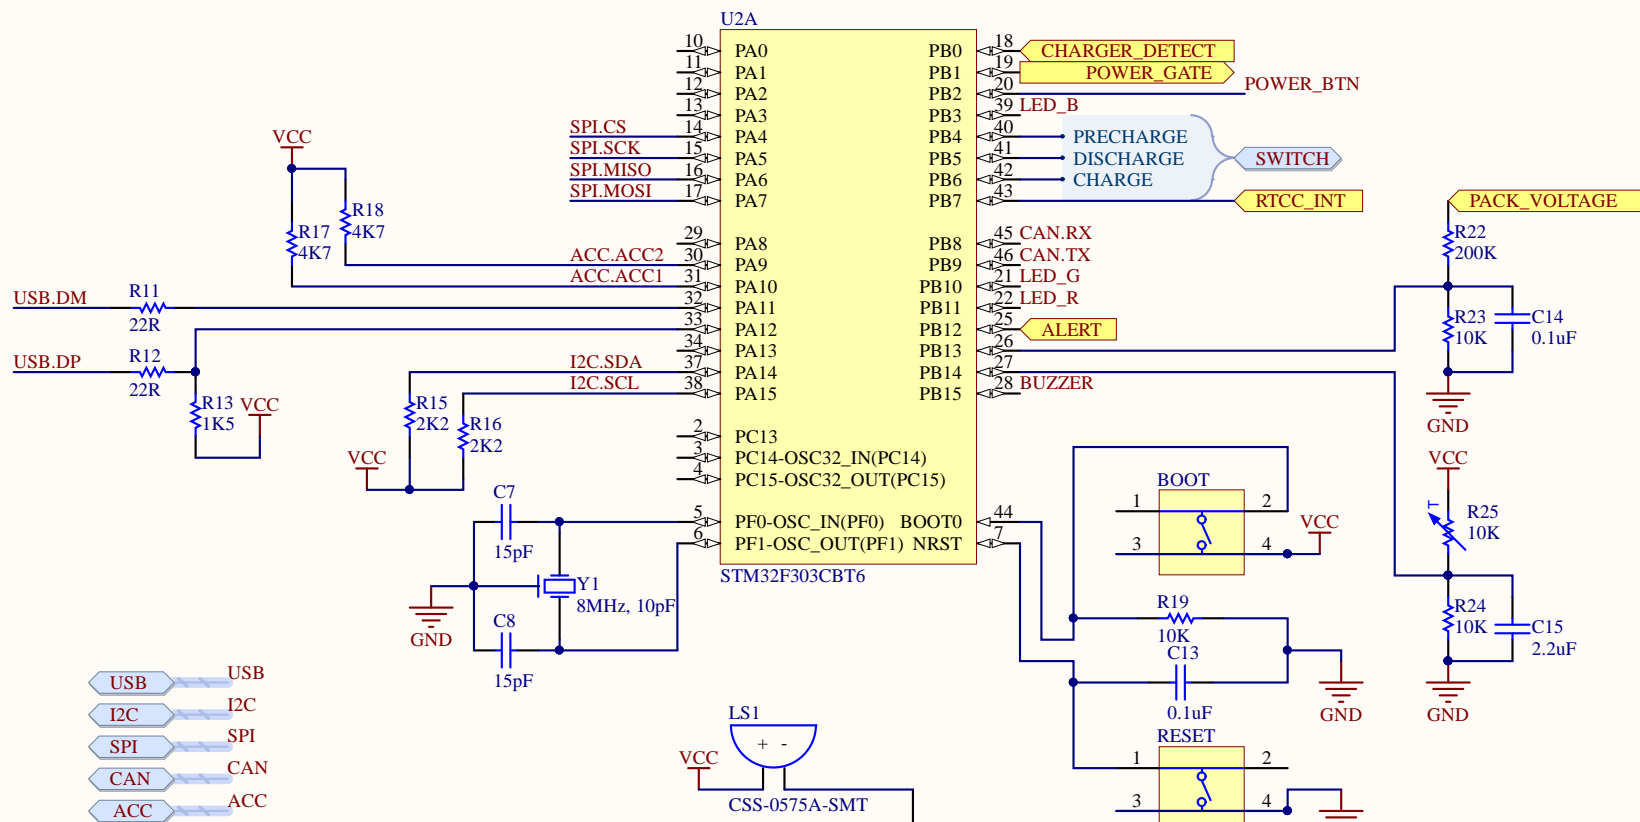


C

C


D

D


Title		
Size	Number	Revision
A		
Date:	10/27/2016	Sheet of
File:	\\..MCU.SchDoc	Drawn By:

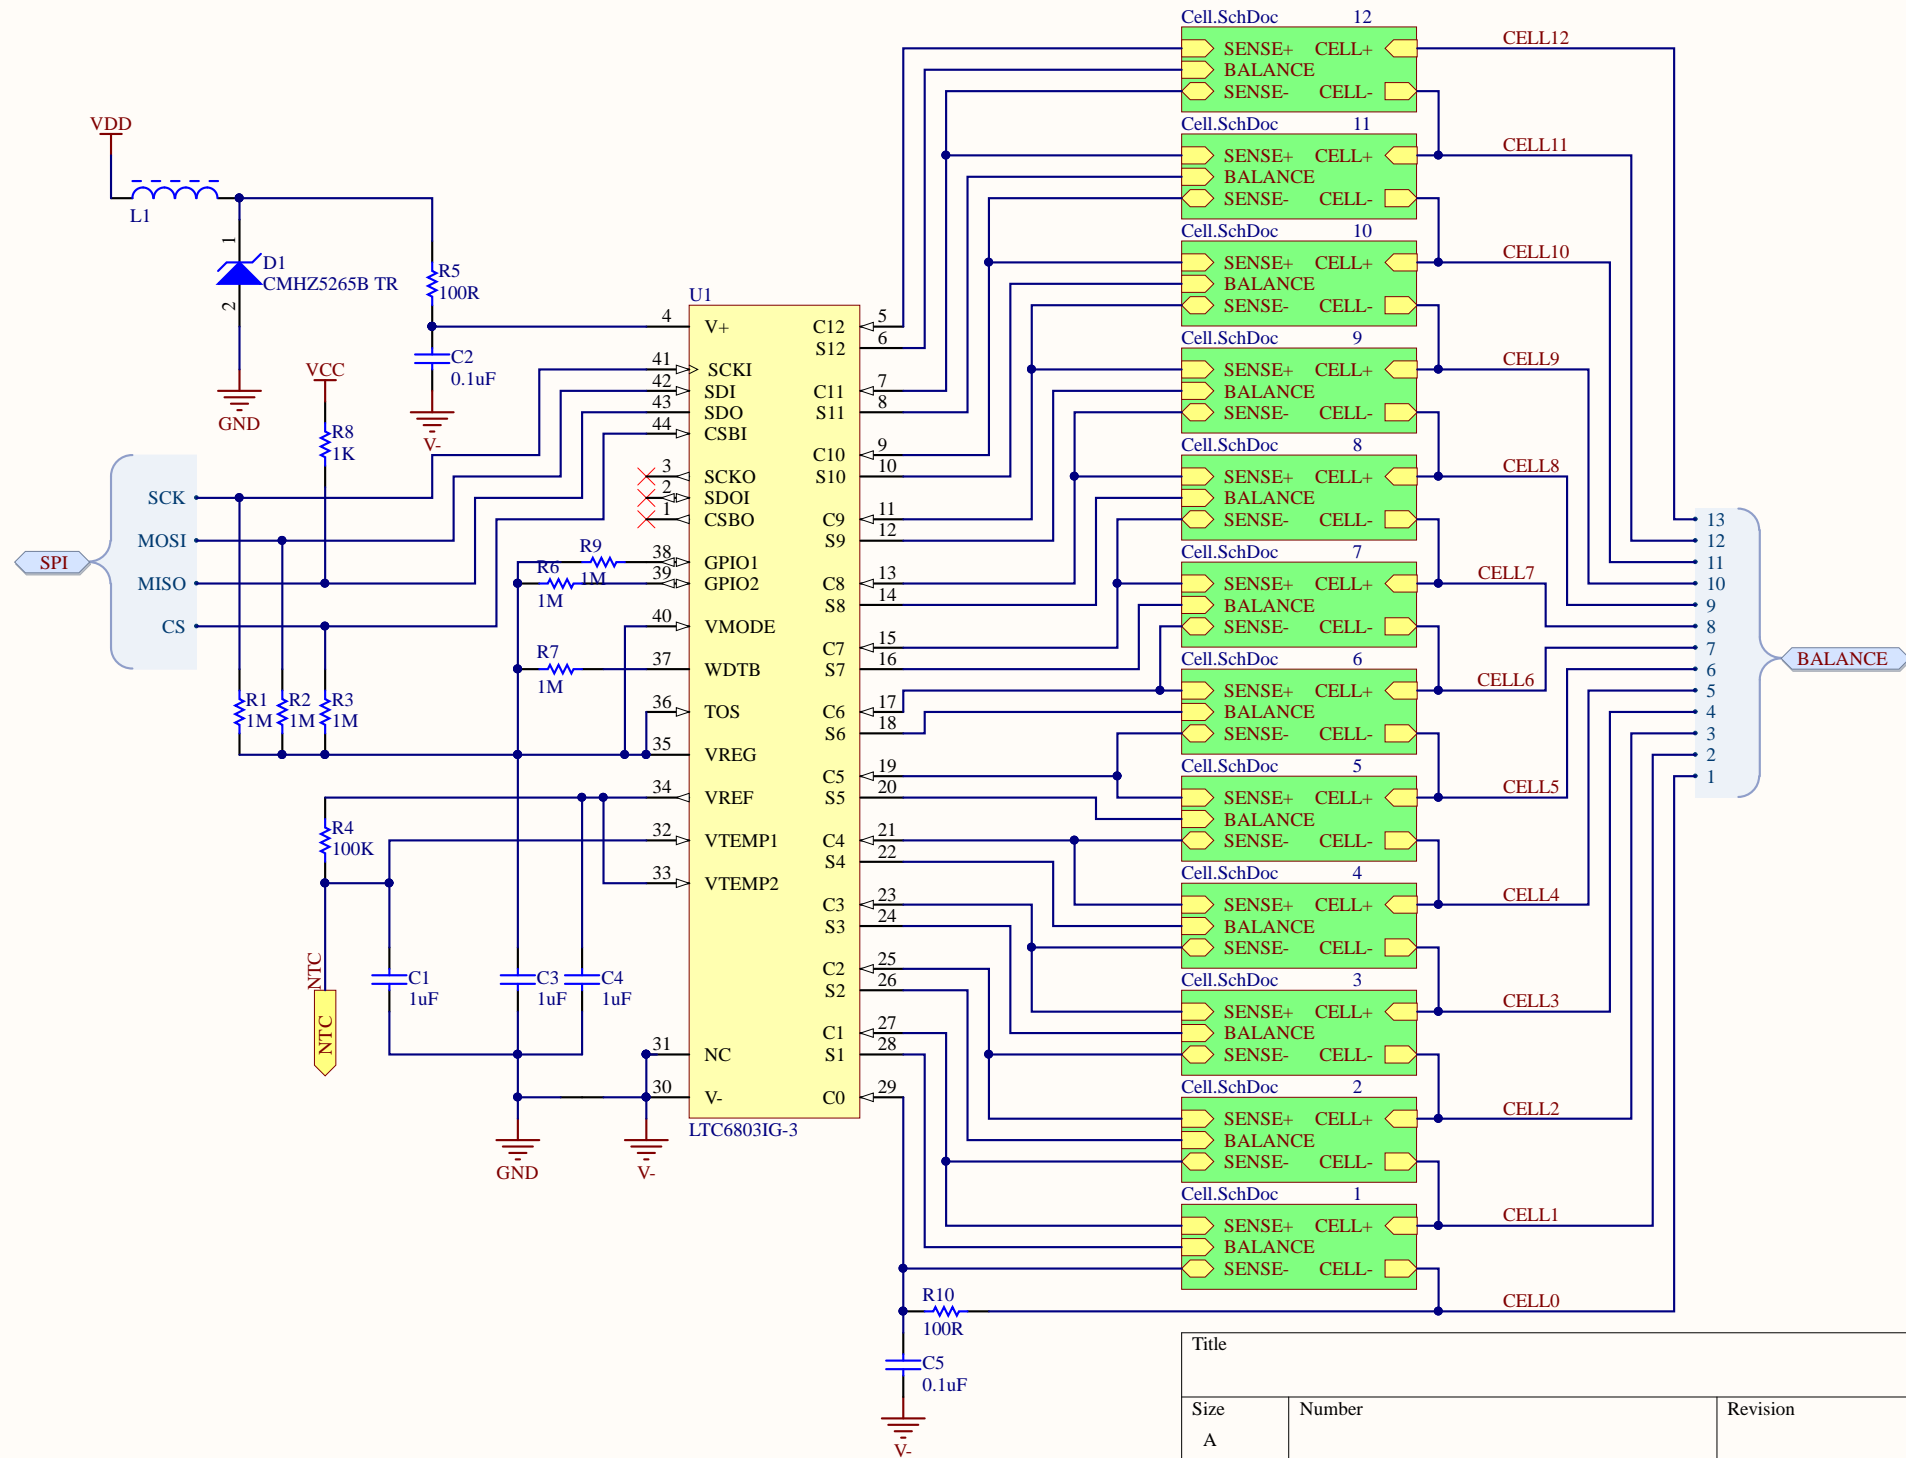


Title		
Size	Number	Revision
A		
Date:	10/27/2016	Sheet of
File:	\\.\LTC6803.SchDoc	Drawn By:

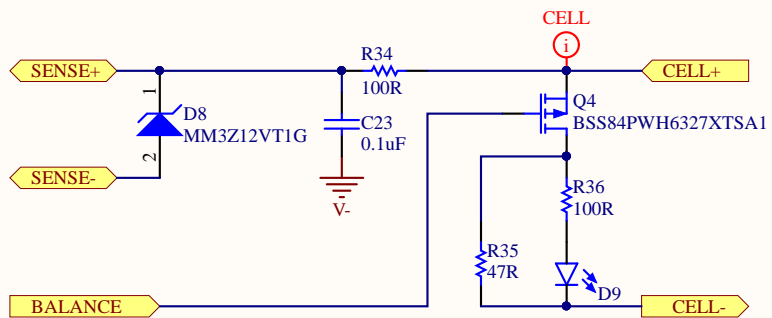

Title		
Size	Number	Revision
A		
Date:	10/27/2016	Sheet of
File:	\\.\Cell.SchDoc	Drawn By:



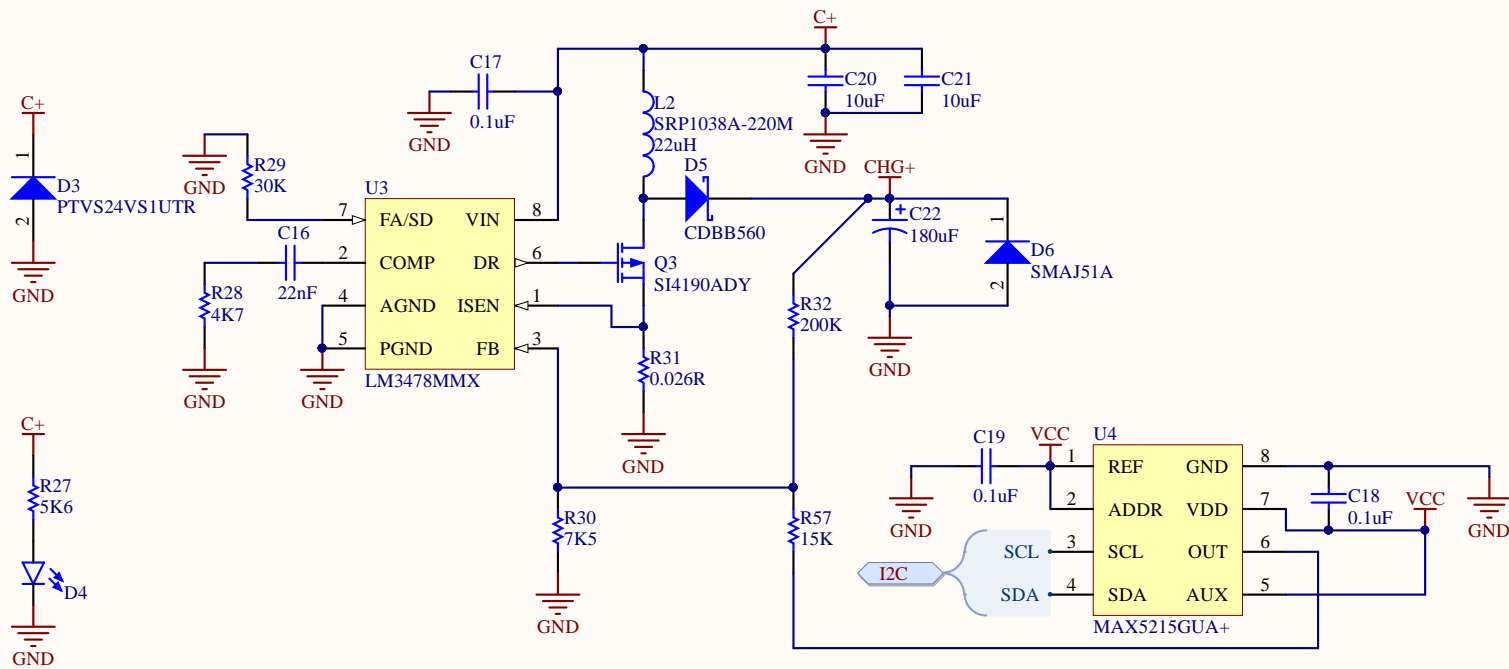


Title		
Size	Number	Revision
A		
Date:	10/27/2016	Sheet of
File:	\\..\Charging.SchDoc	Drawn By:

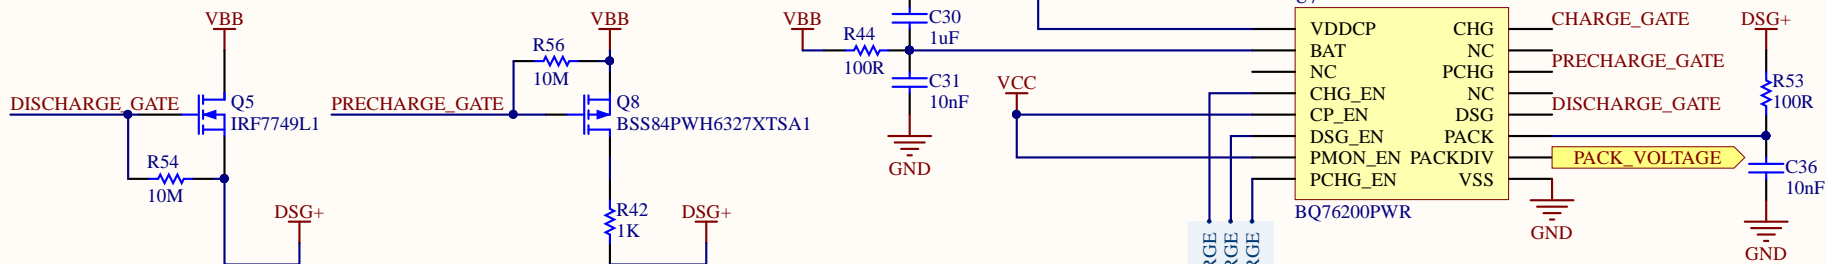


Power Ports:


--  
 B+ is tied to battery lead  
 VBB is high-side voltage, after current sense  
 CHG+ is charger output voltage if available, VBB otherwise  
 VDD is toggleable high-side voltage for BMS functions  
 VCC is logic-level voltage (3v3)  
 DSG+ is discharge output

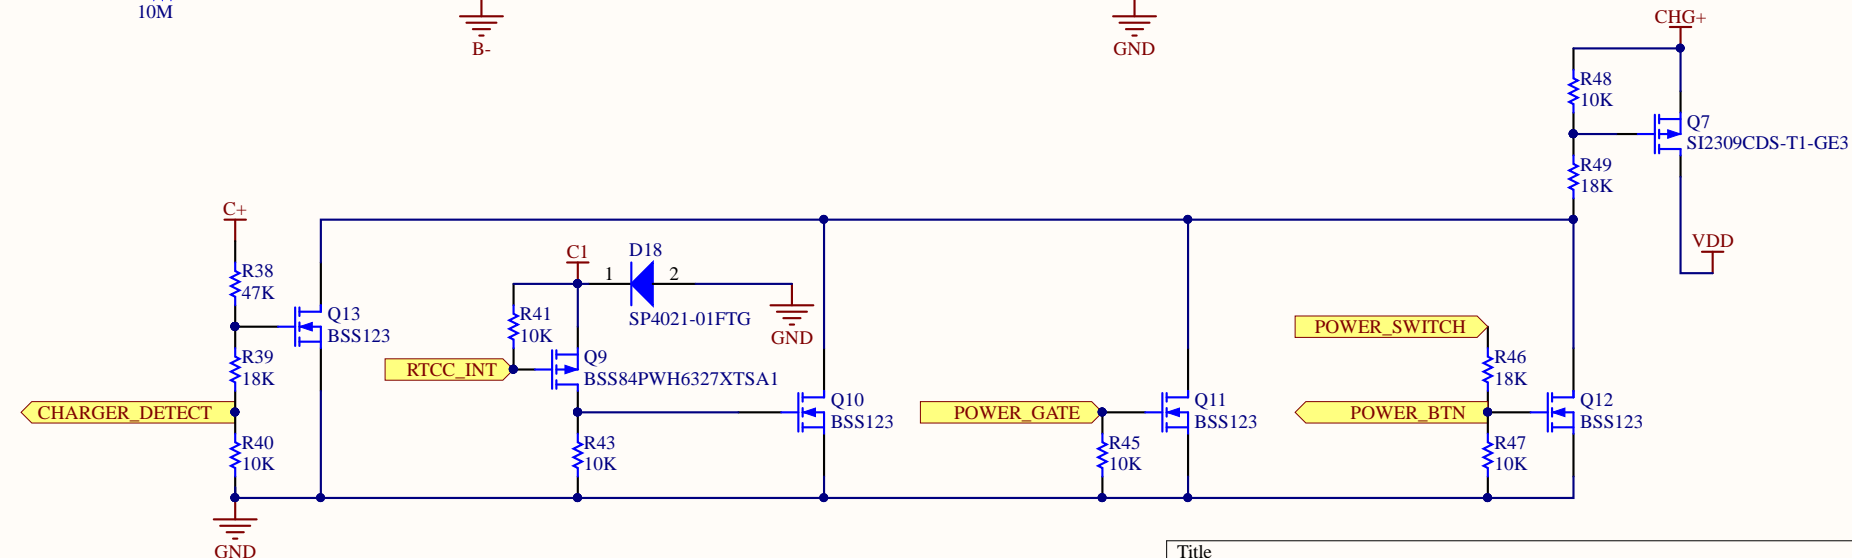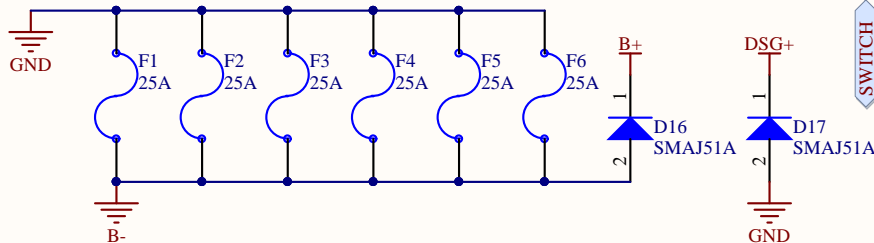


Title		
Size	Number	Revision
A		
Date:	10/27/2016	Sheet of
File:	\\...\Switches.SchDoc	Drawn By:

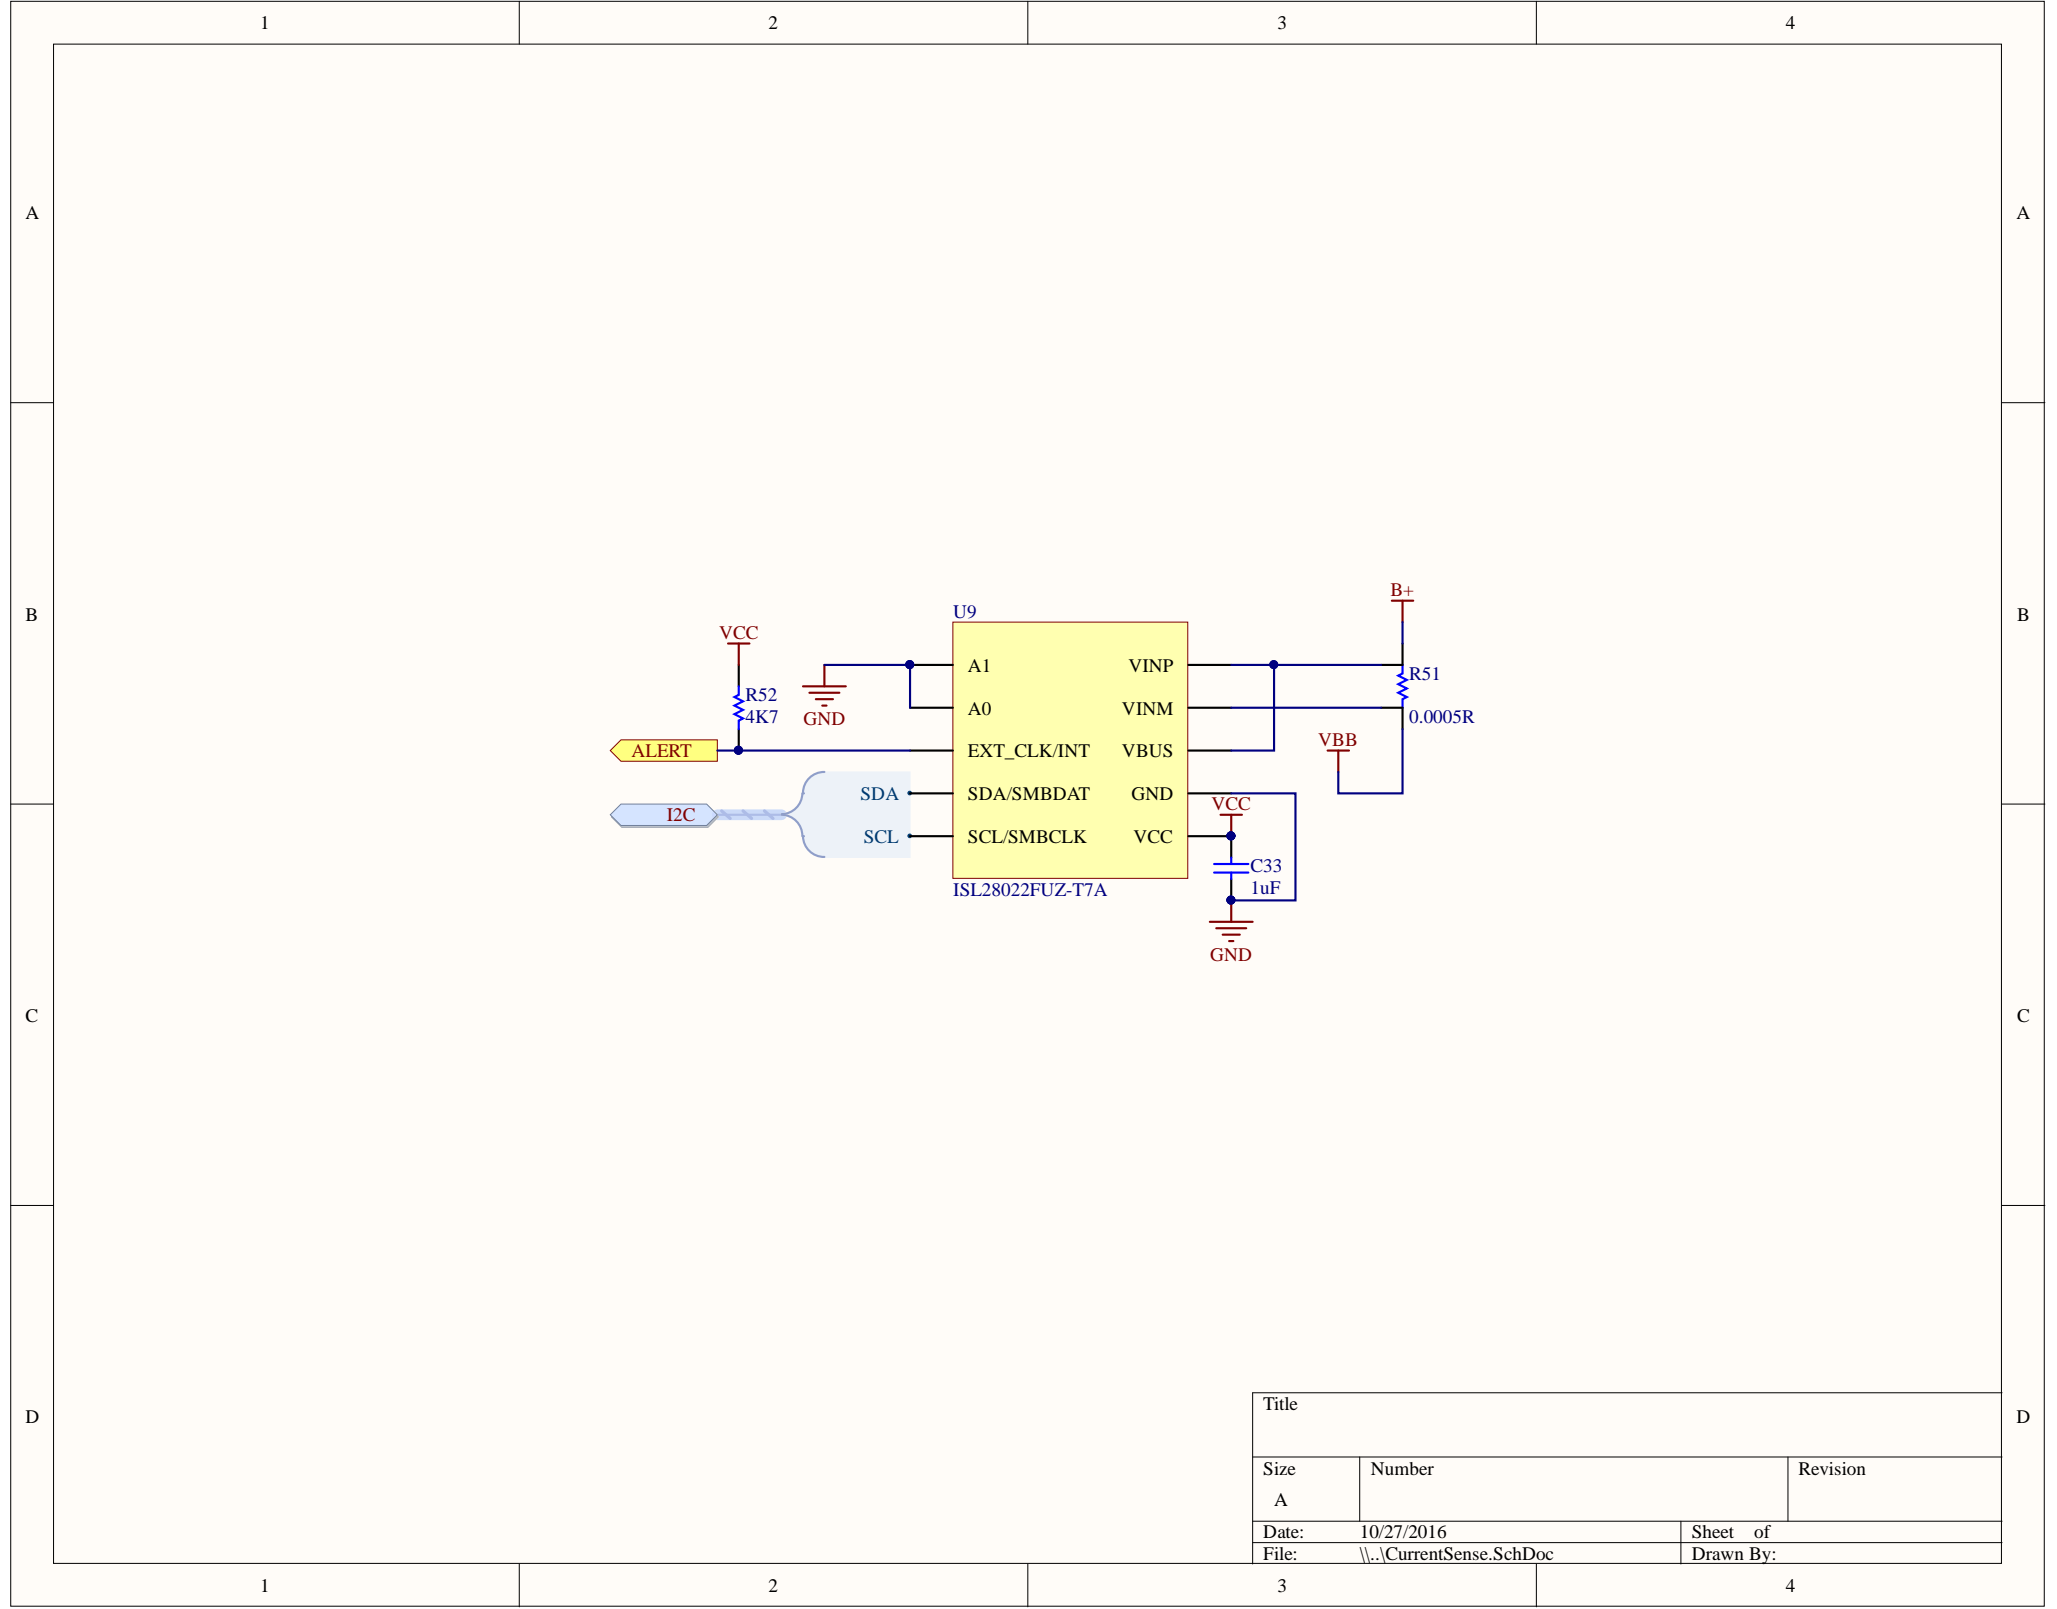




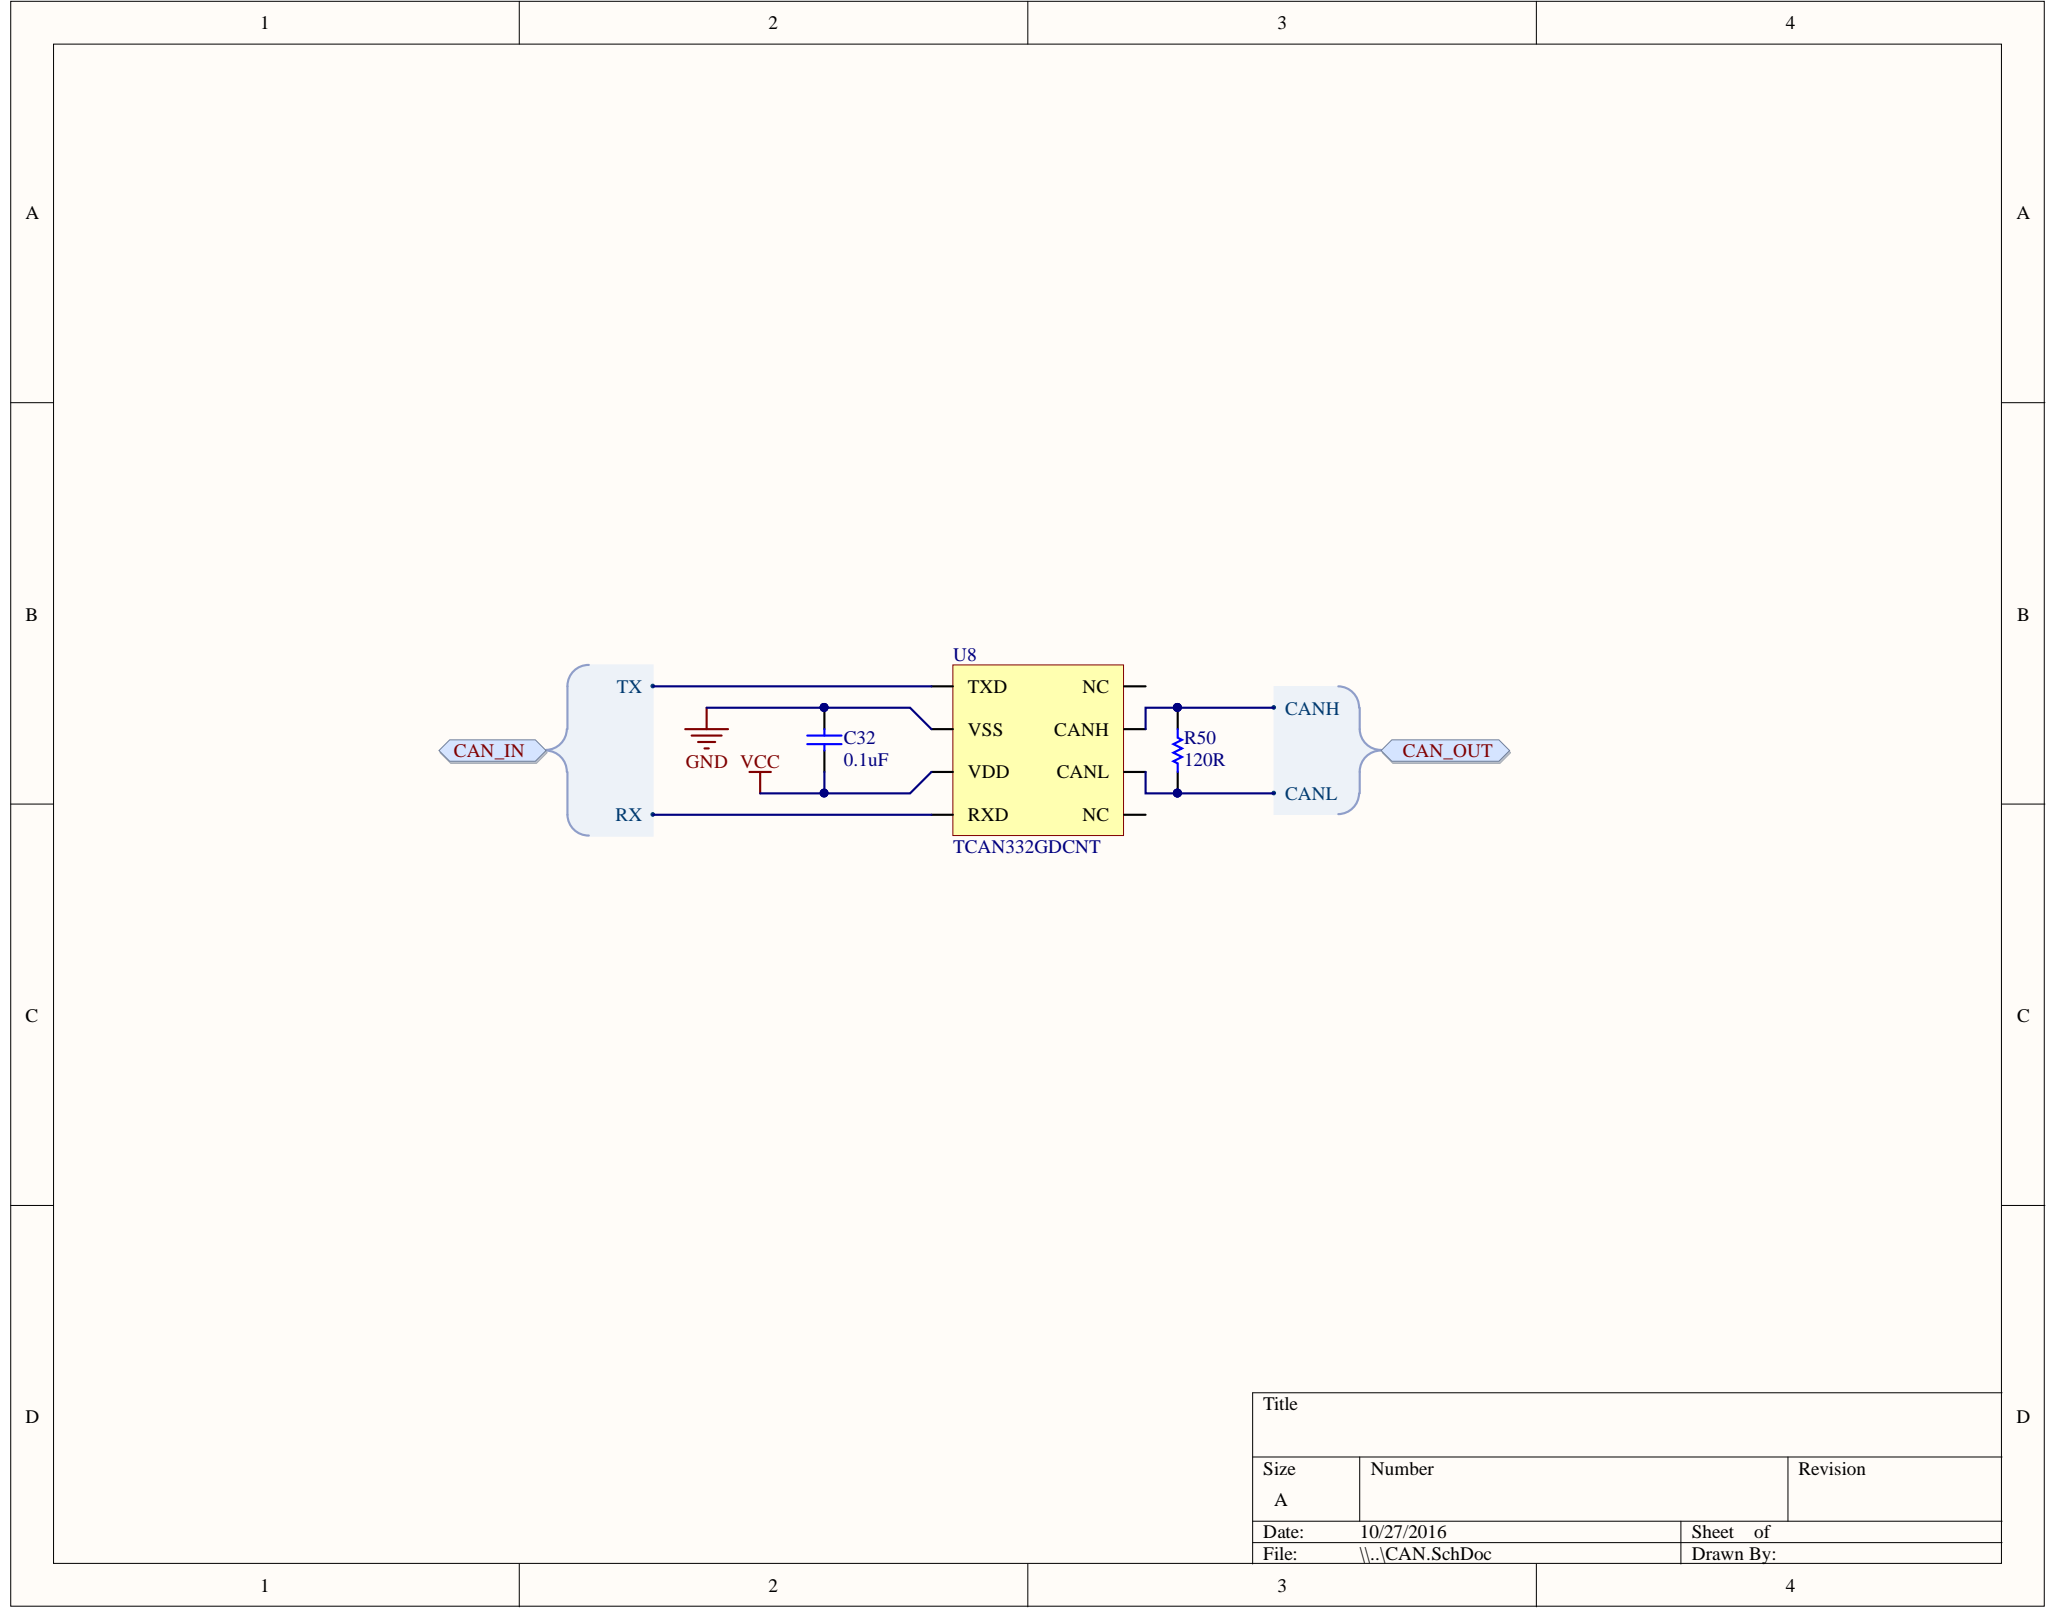

Title		
Size	Number	Revision
A		
Date:	10/27/2016	Sheet of
File:	\\..CAN.SchDoc	Drawn By:

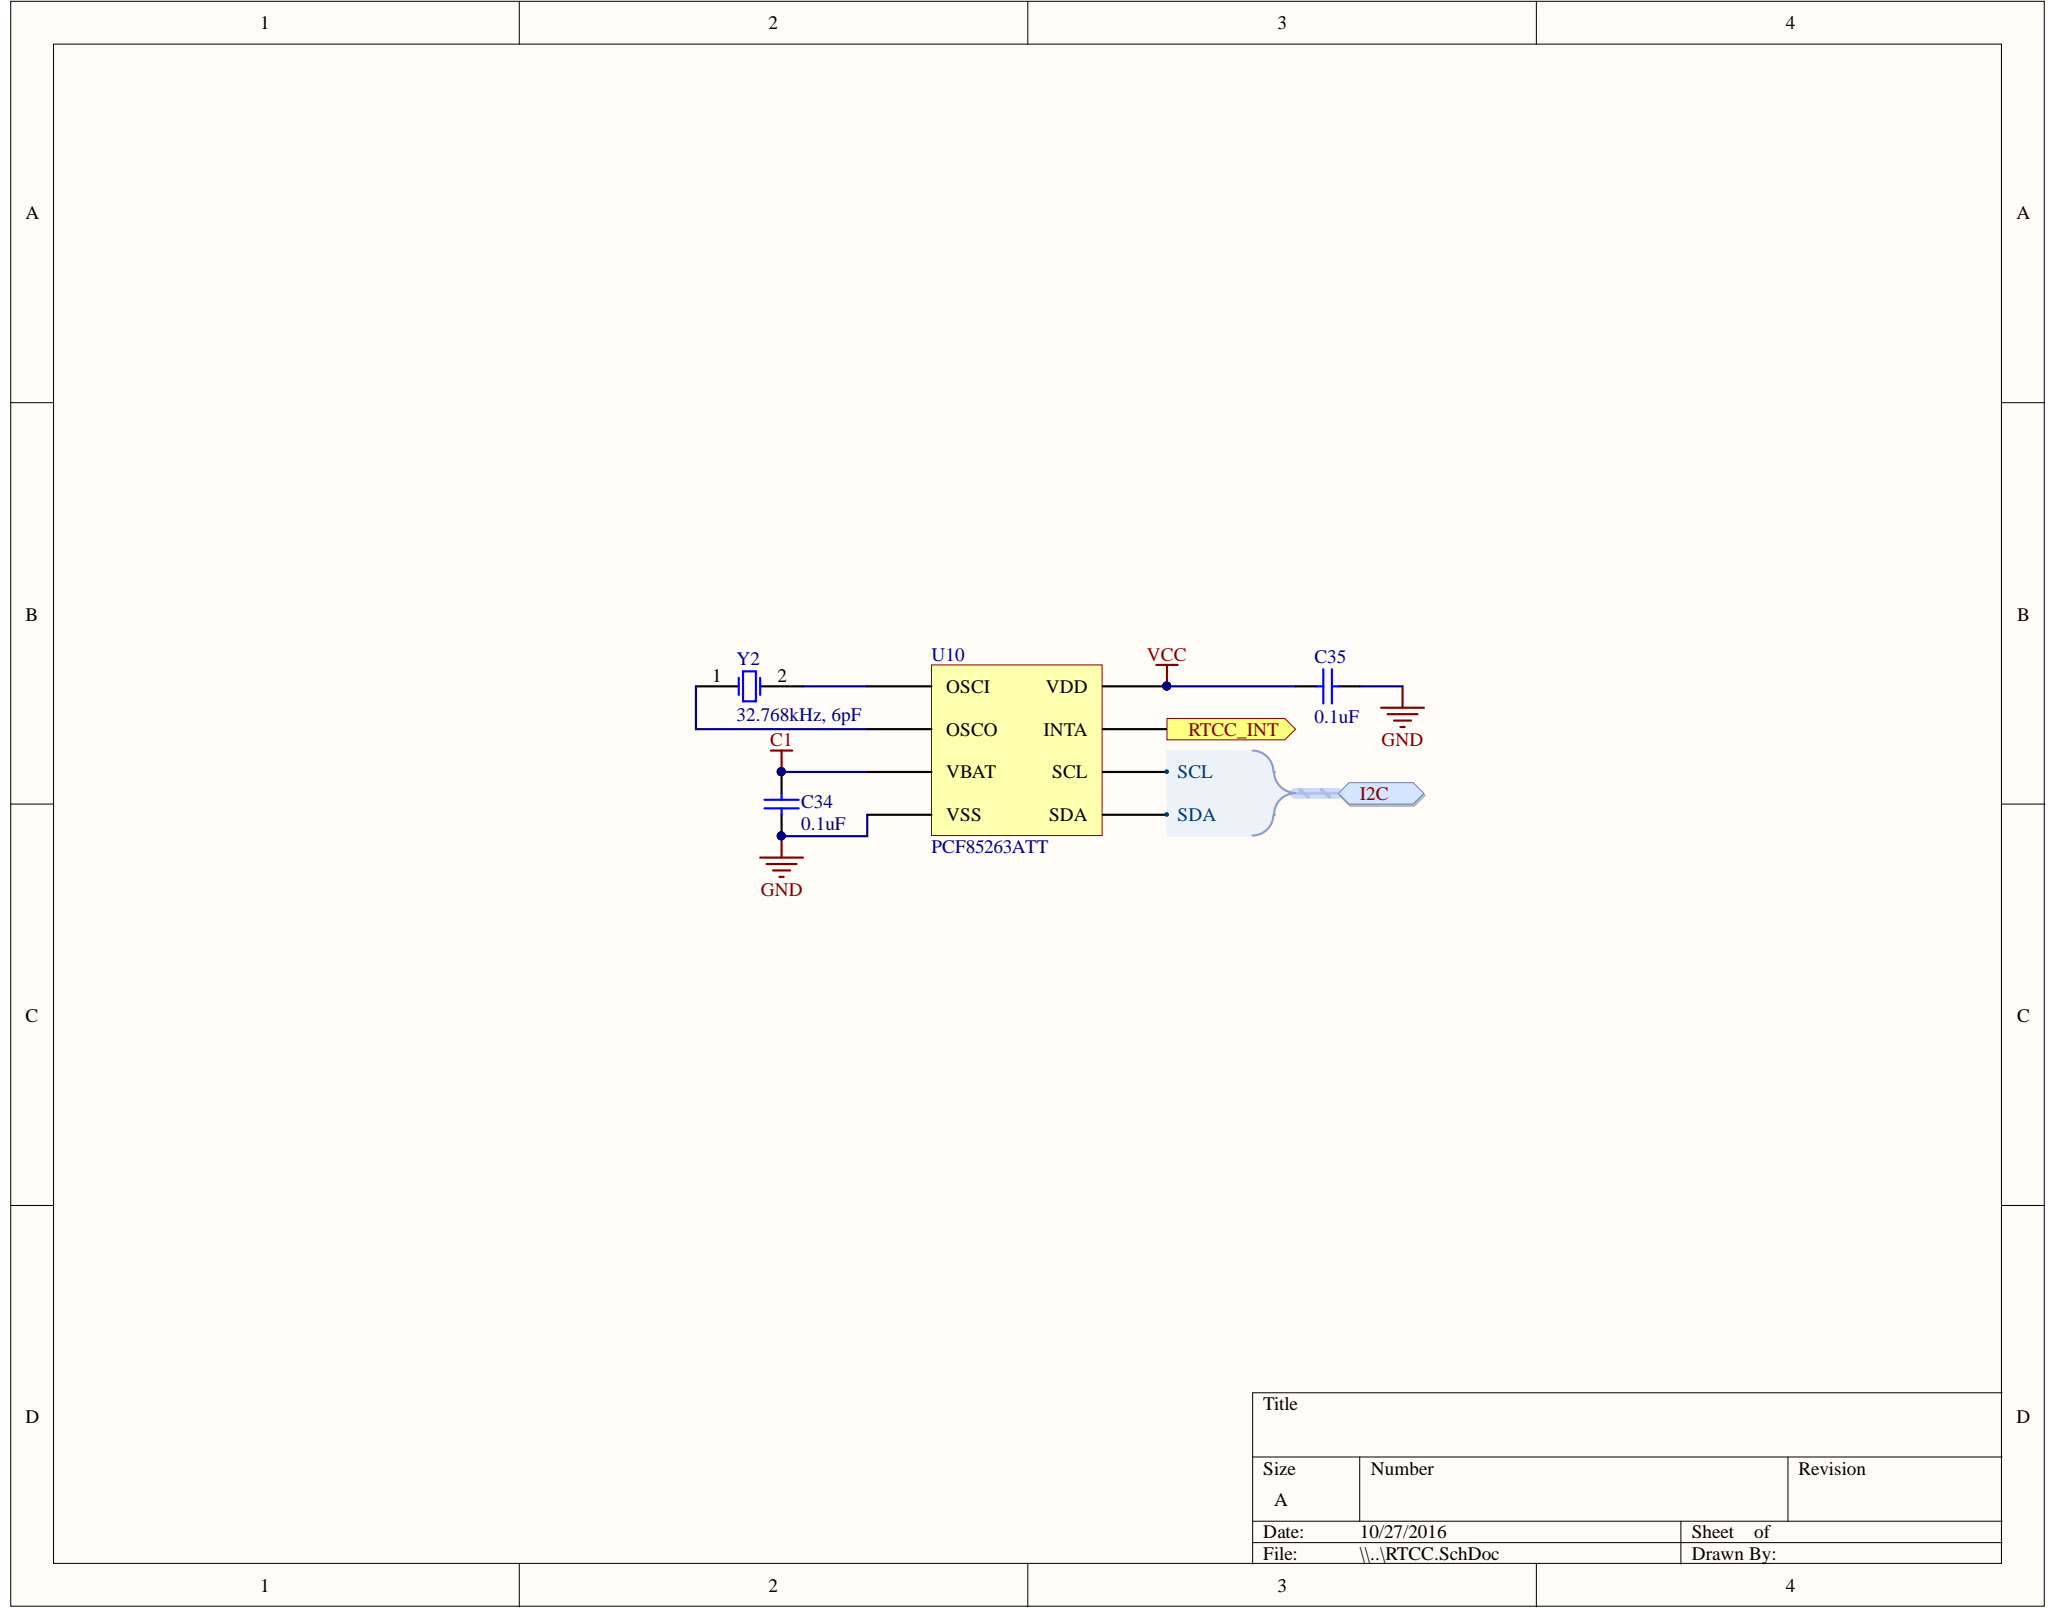

Title		
Size	Number	Revision
A		
Date:	10/27/2016	Sheet of
File:	\\..RTCC.SchDoc	Drawn By:

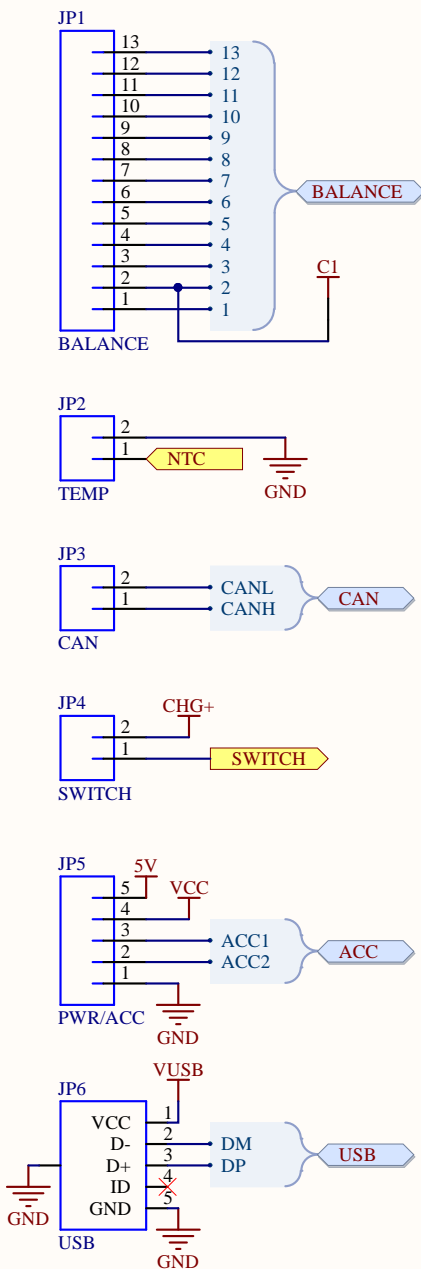

Title		
Size	Number	Revision
A		
Date:	10/27/2016	Sheet of
File:	\\.\Connectors.SchDoc	Drawn By:

