



Title		
Size	Number	Revision
A		
Date:	10/26/2016	Sheet of
File:	\\.\BMS.SchDoc	Drawn By:

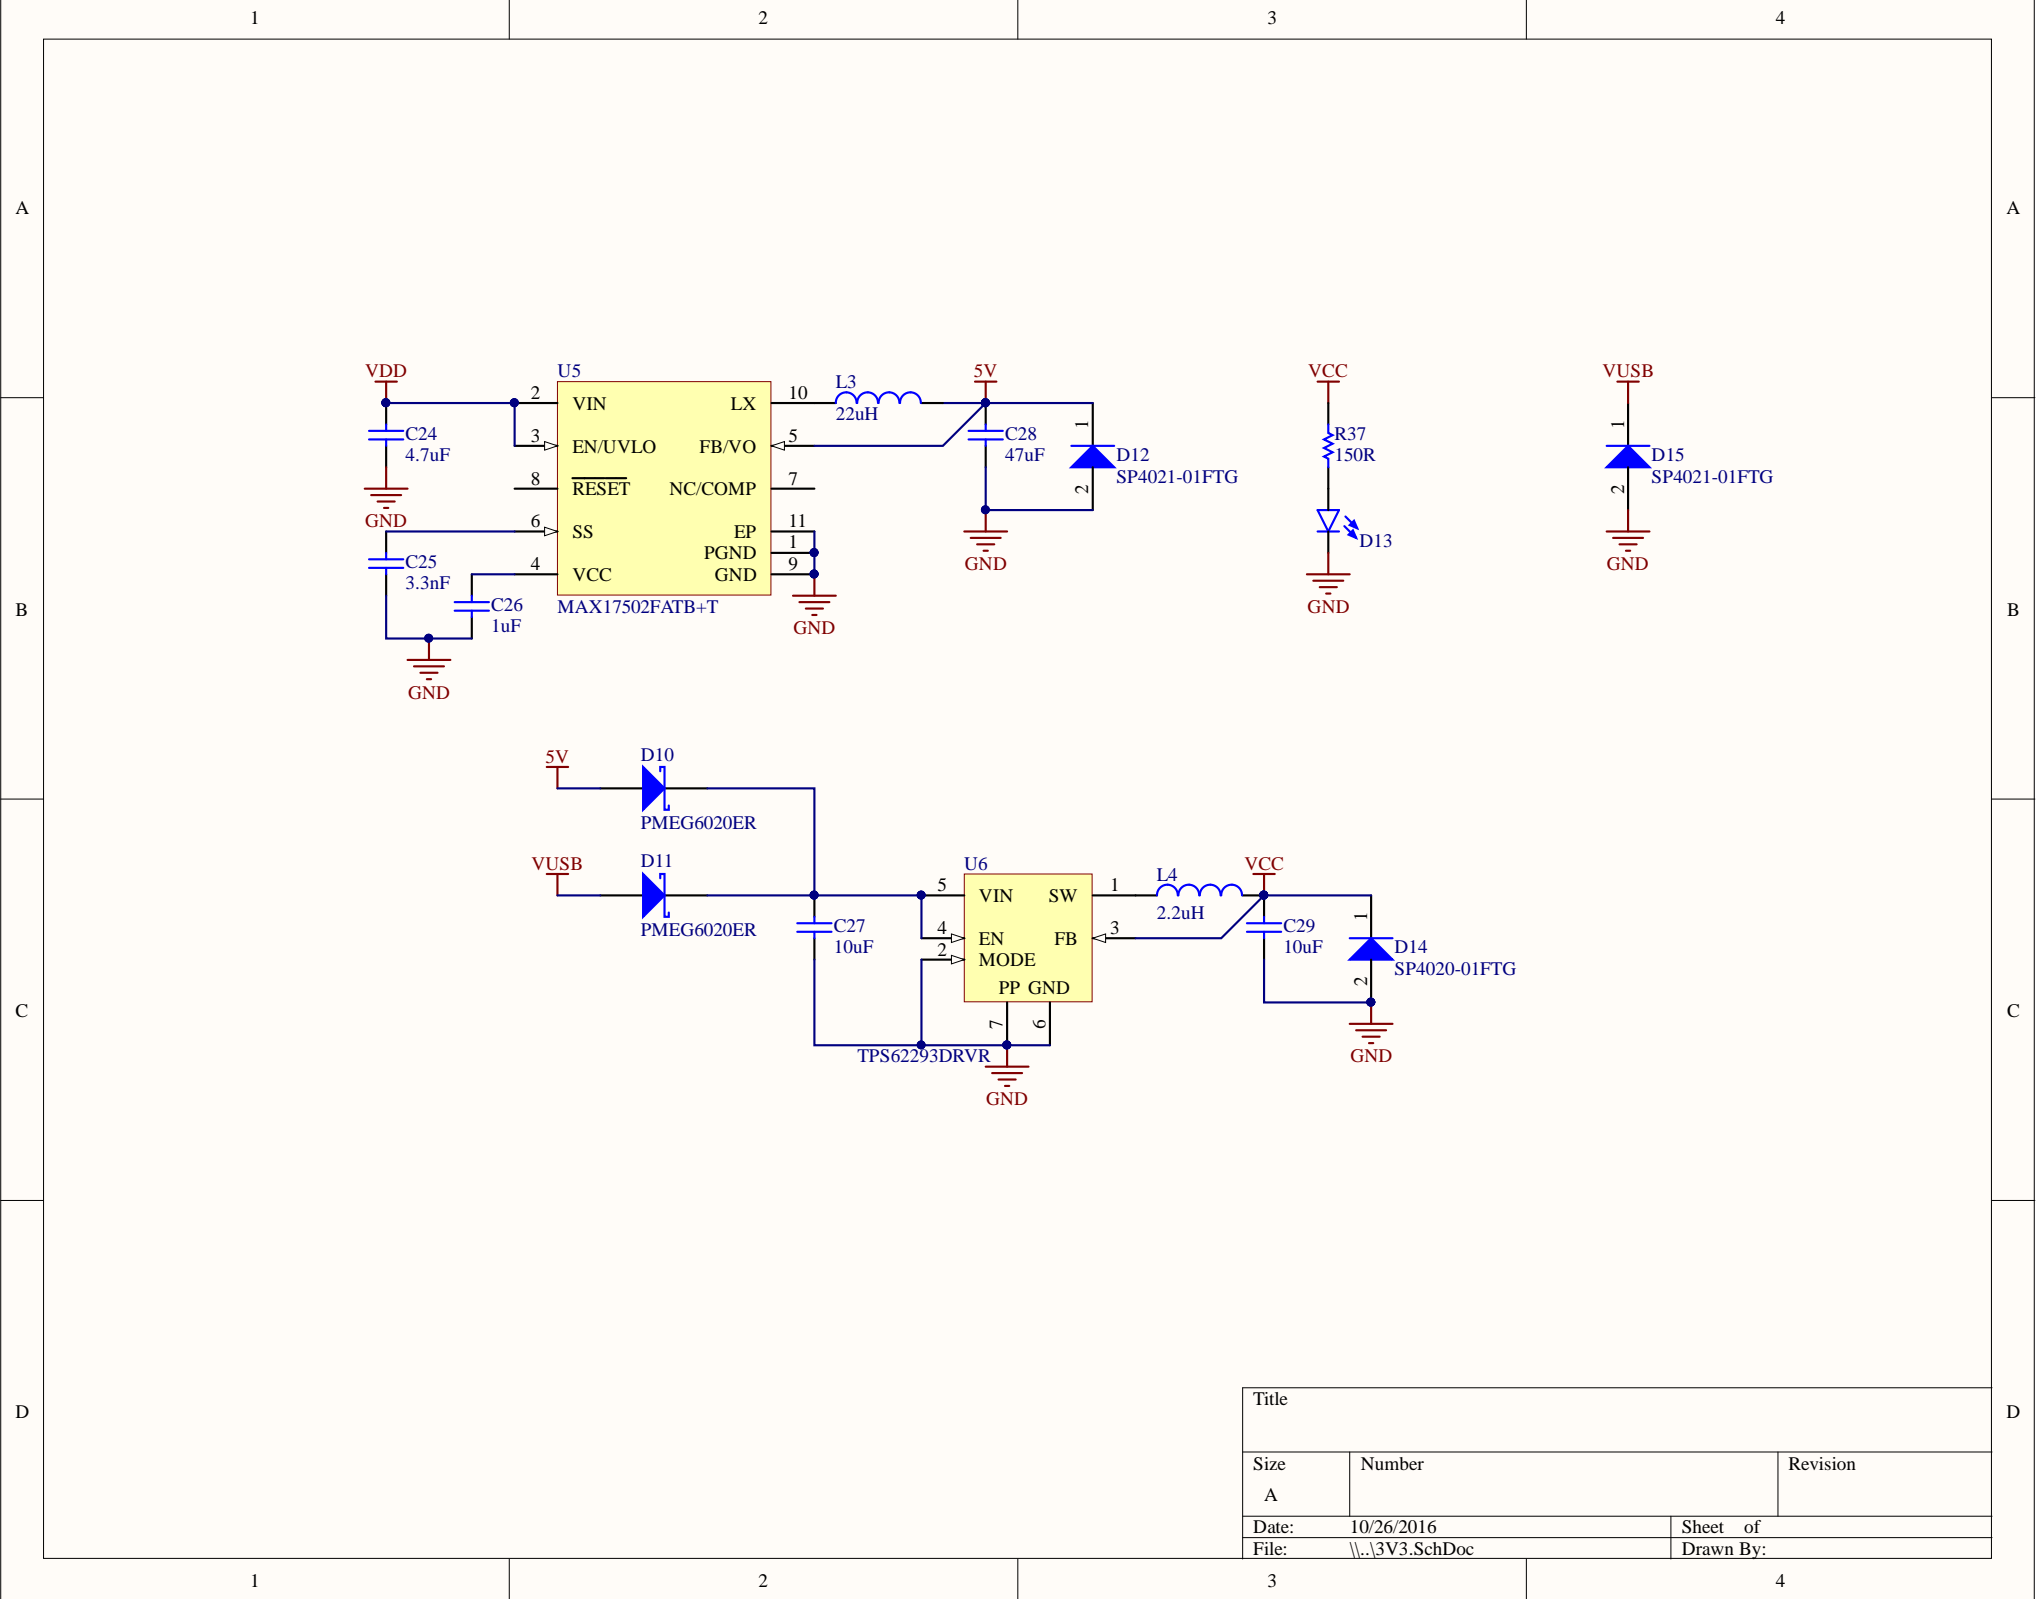

Title		
Size	Number	Revision
A		
Date:	10/26/2016	Sheet of
File:	\\.\3V3.SchDoc	Drawn By:


A

A

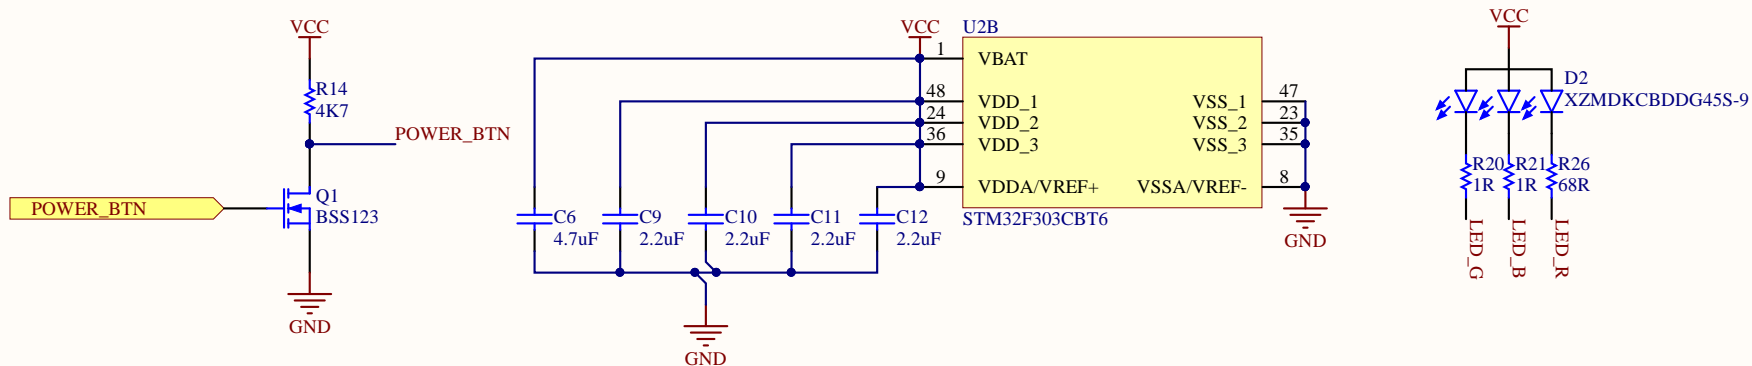

B

B

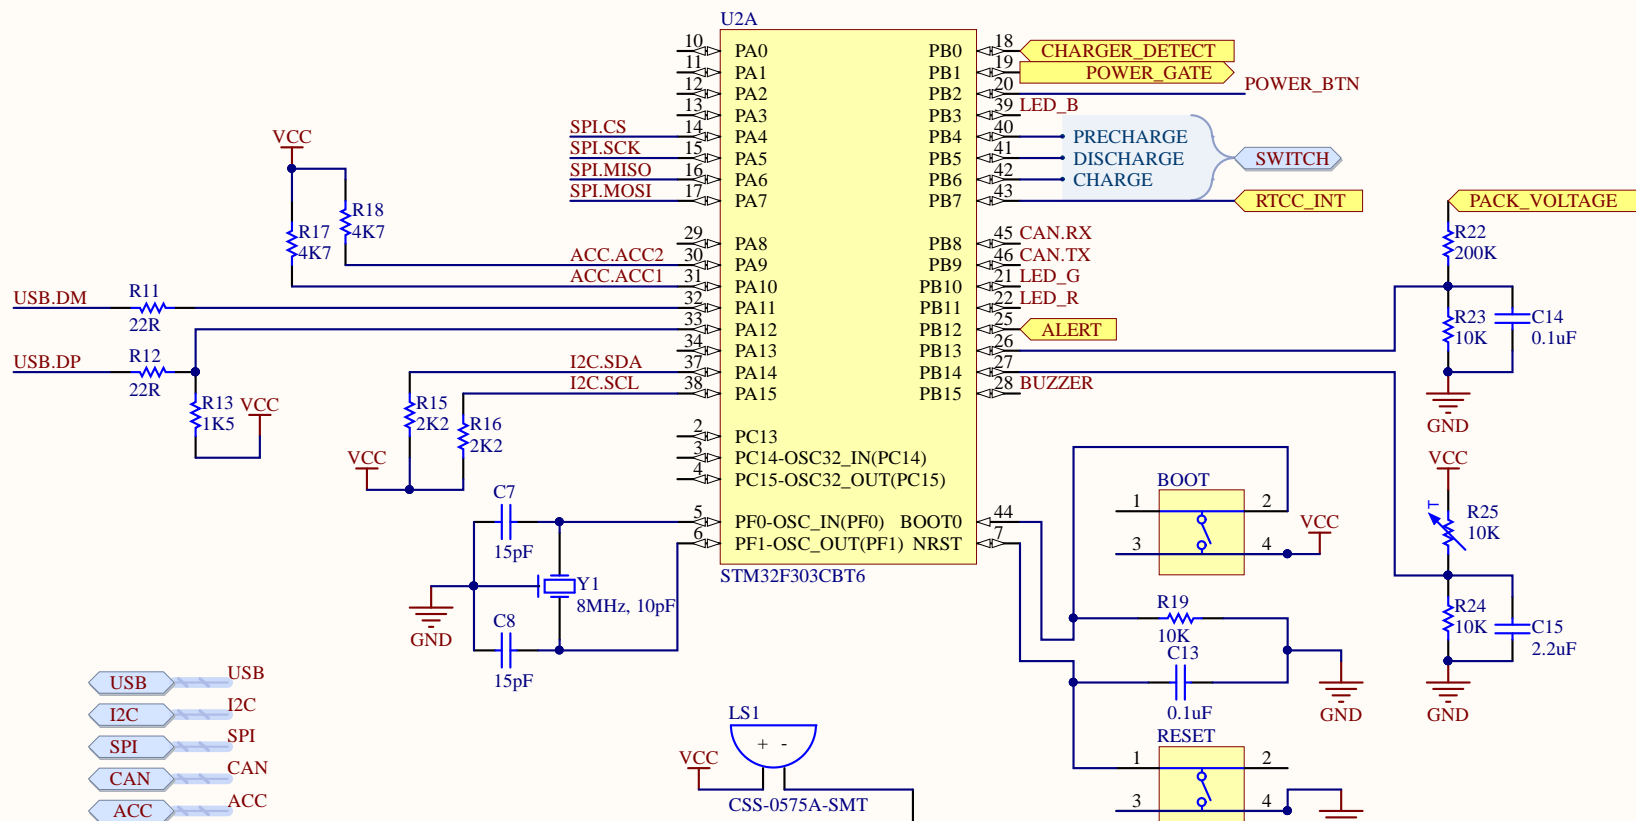


C

C


D

D




Title		
Size	Number	Revision
A		
Date:	10/26/2016	Sheet of
File:	\\..MCU.SchDoc	Drawn By:




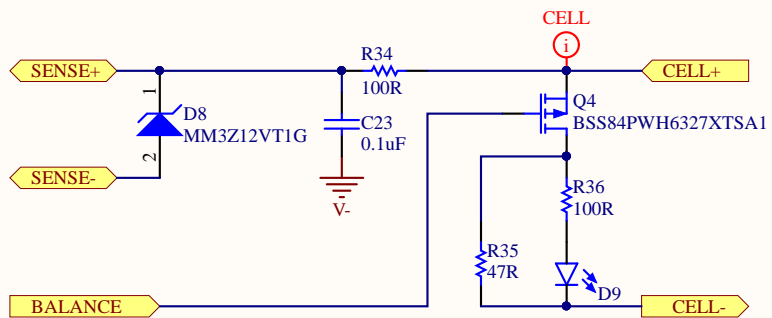

Title		
Size	Number	Revision
A		
Date:	10/26/2016	Sheet of
File:	\\..\Cell.SchDoc	Drawn By:

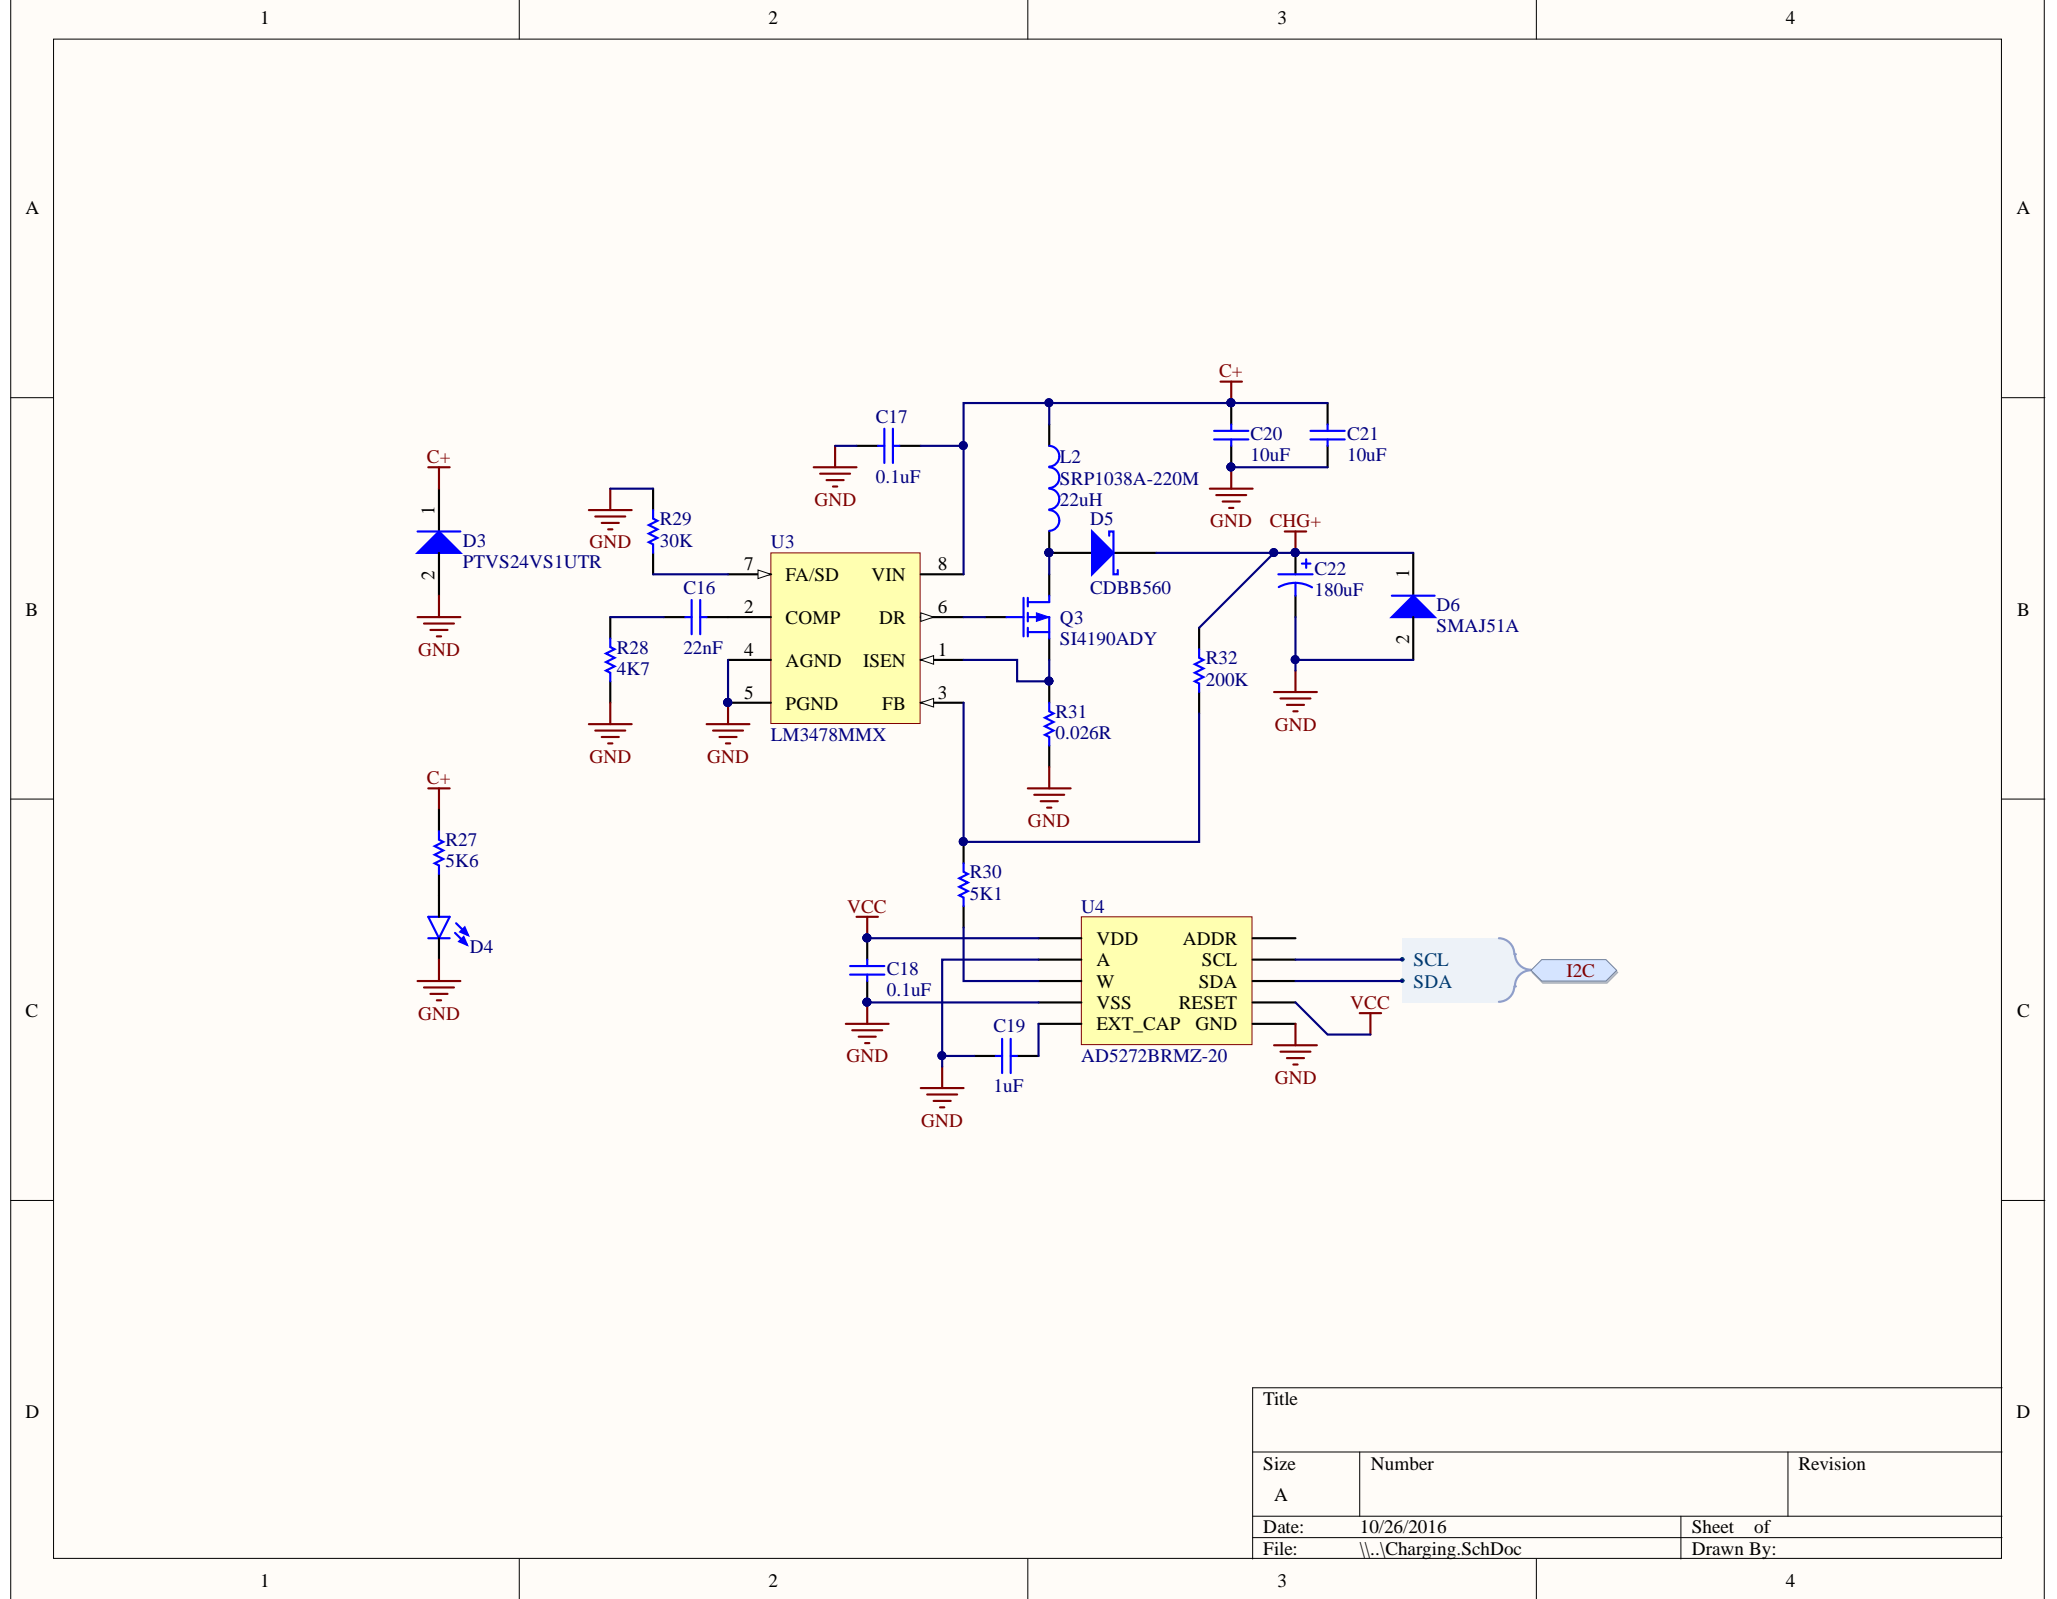

Title		
Size	Number	Revision
A		
Date:	10/26/2016	Sheet of
File:	\\.\Charging.SchDoc	Drawn By:

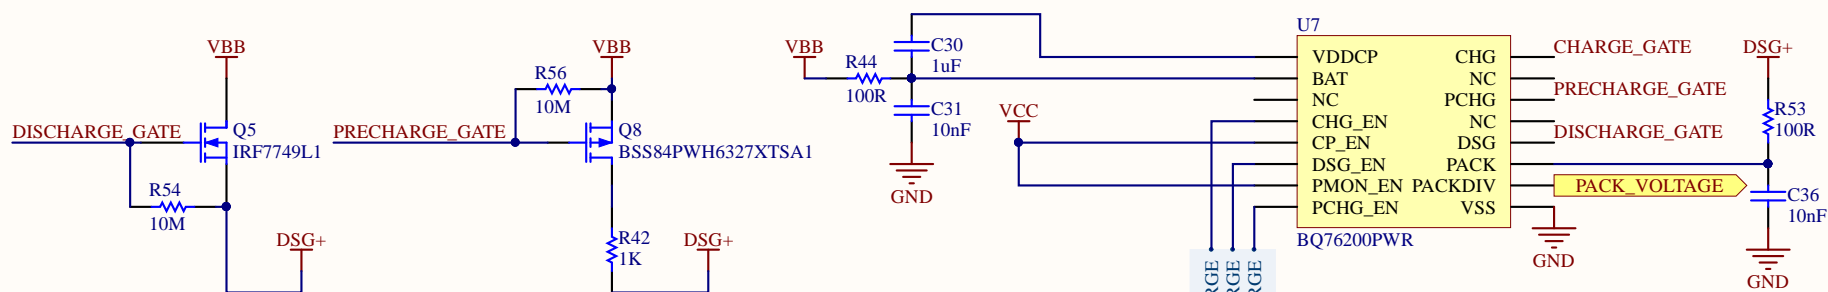

Power Ports:

--

B+ is tied to battery lead




VBB is high-side voltage, after current sense

CHG+ is charger output voltage if available, VBB otherwise

VDD is toggleable high-side voltage for BMS functions

VCC is logic-level voltage (3v3)

DSG+ is discharge output

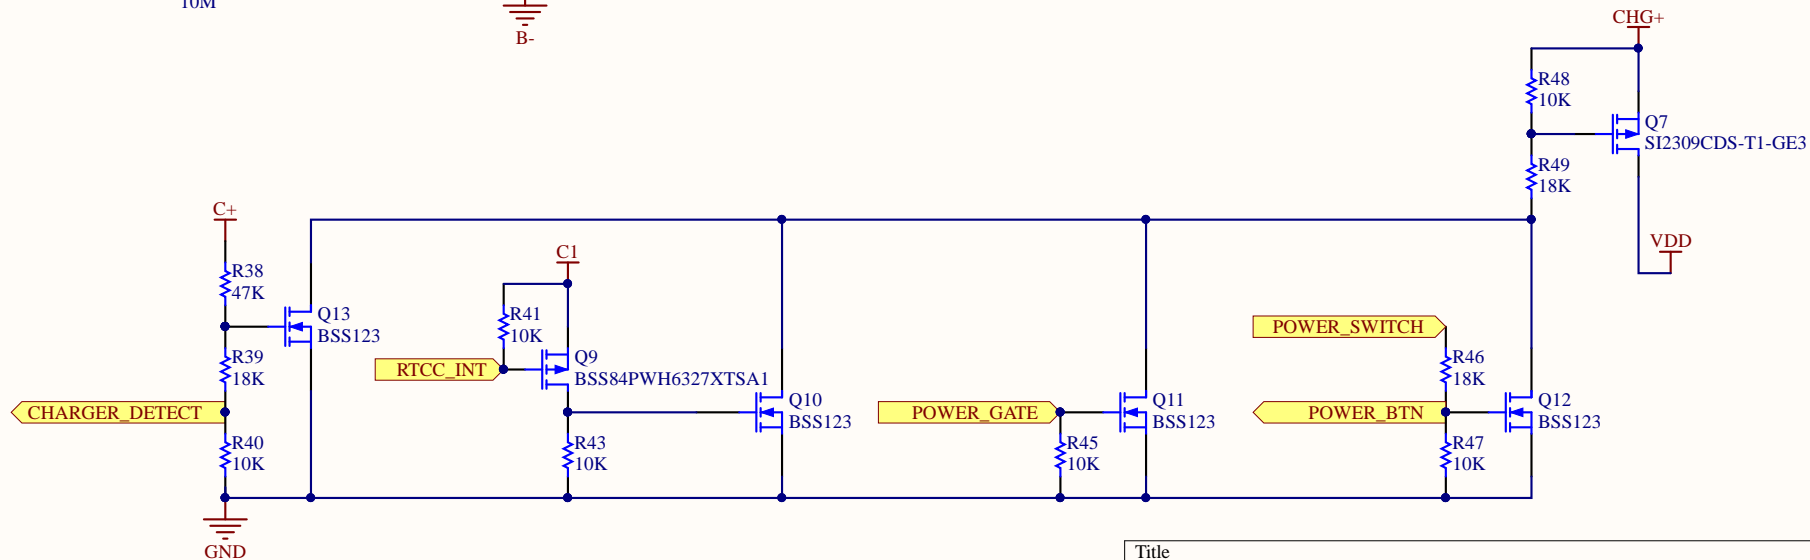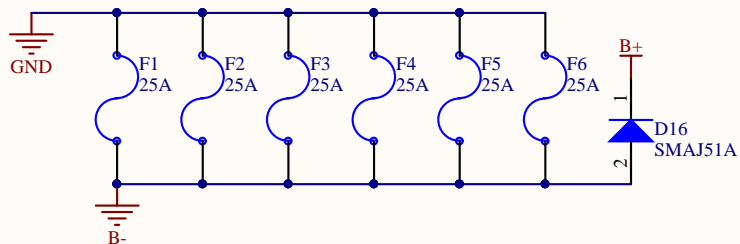

Title

Size

Number

Revision

Date:


10/26/2016

Sheet of


File:


\\...\Switches.SchDoc


Drawn By:

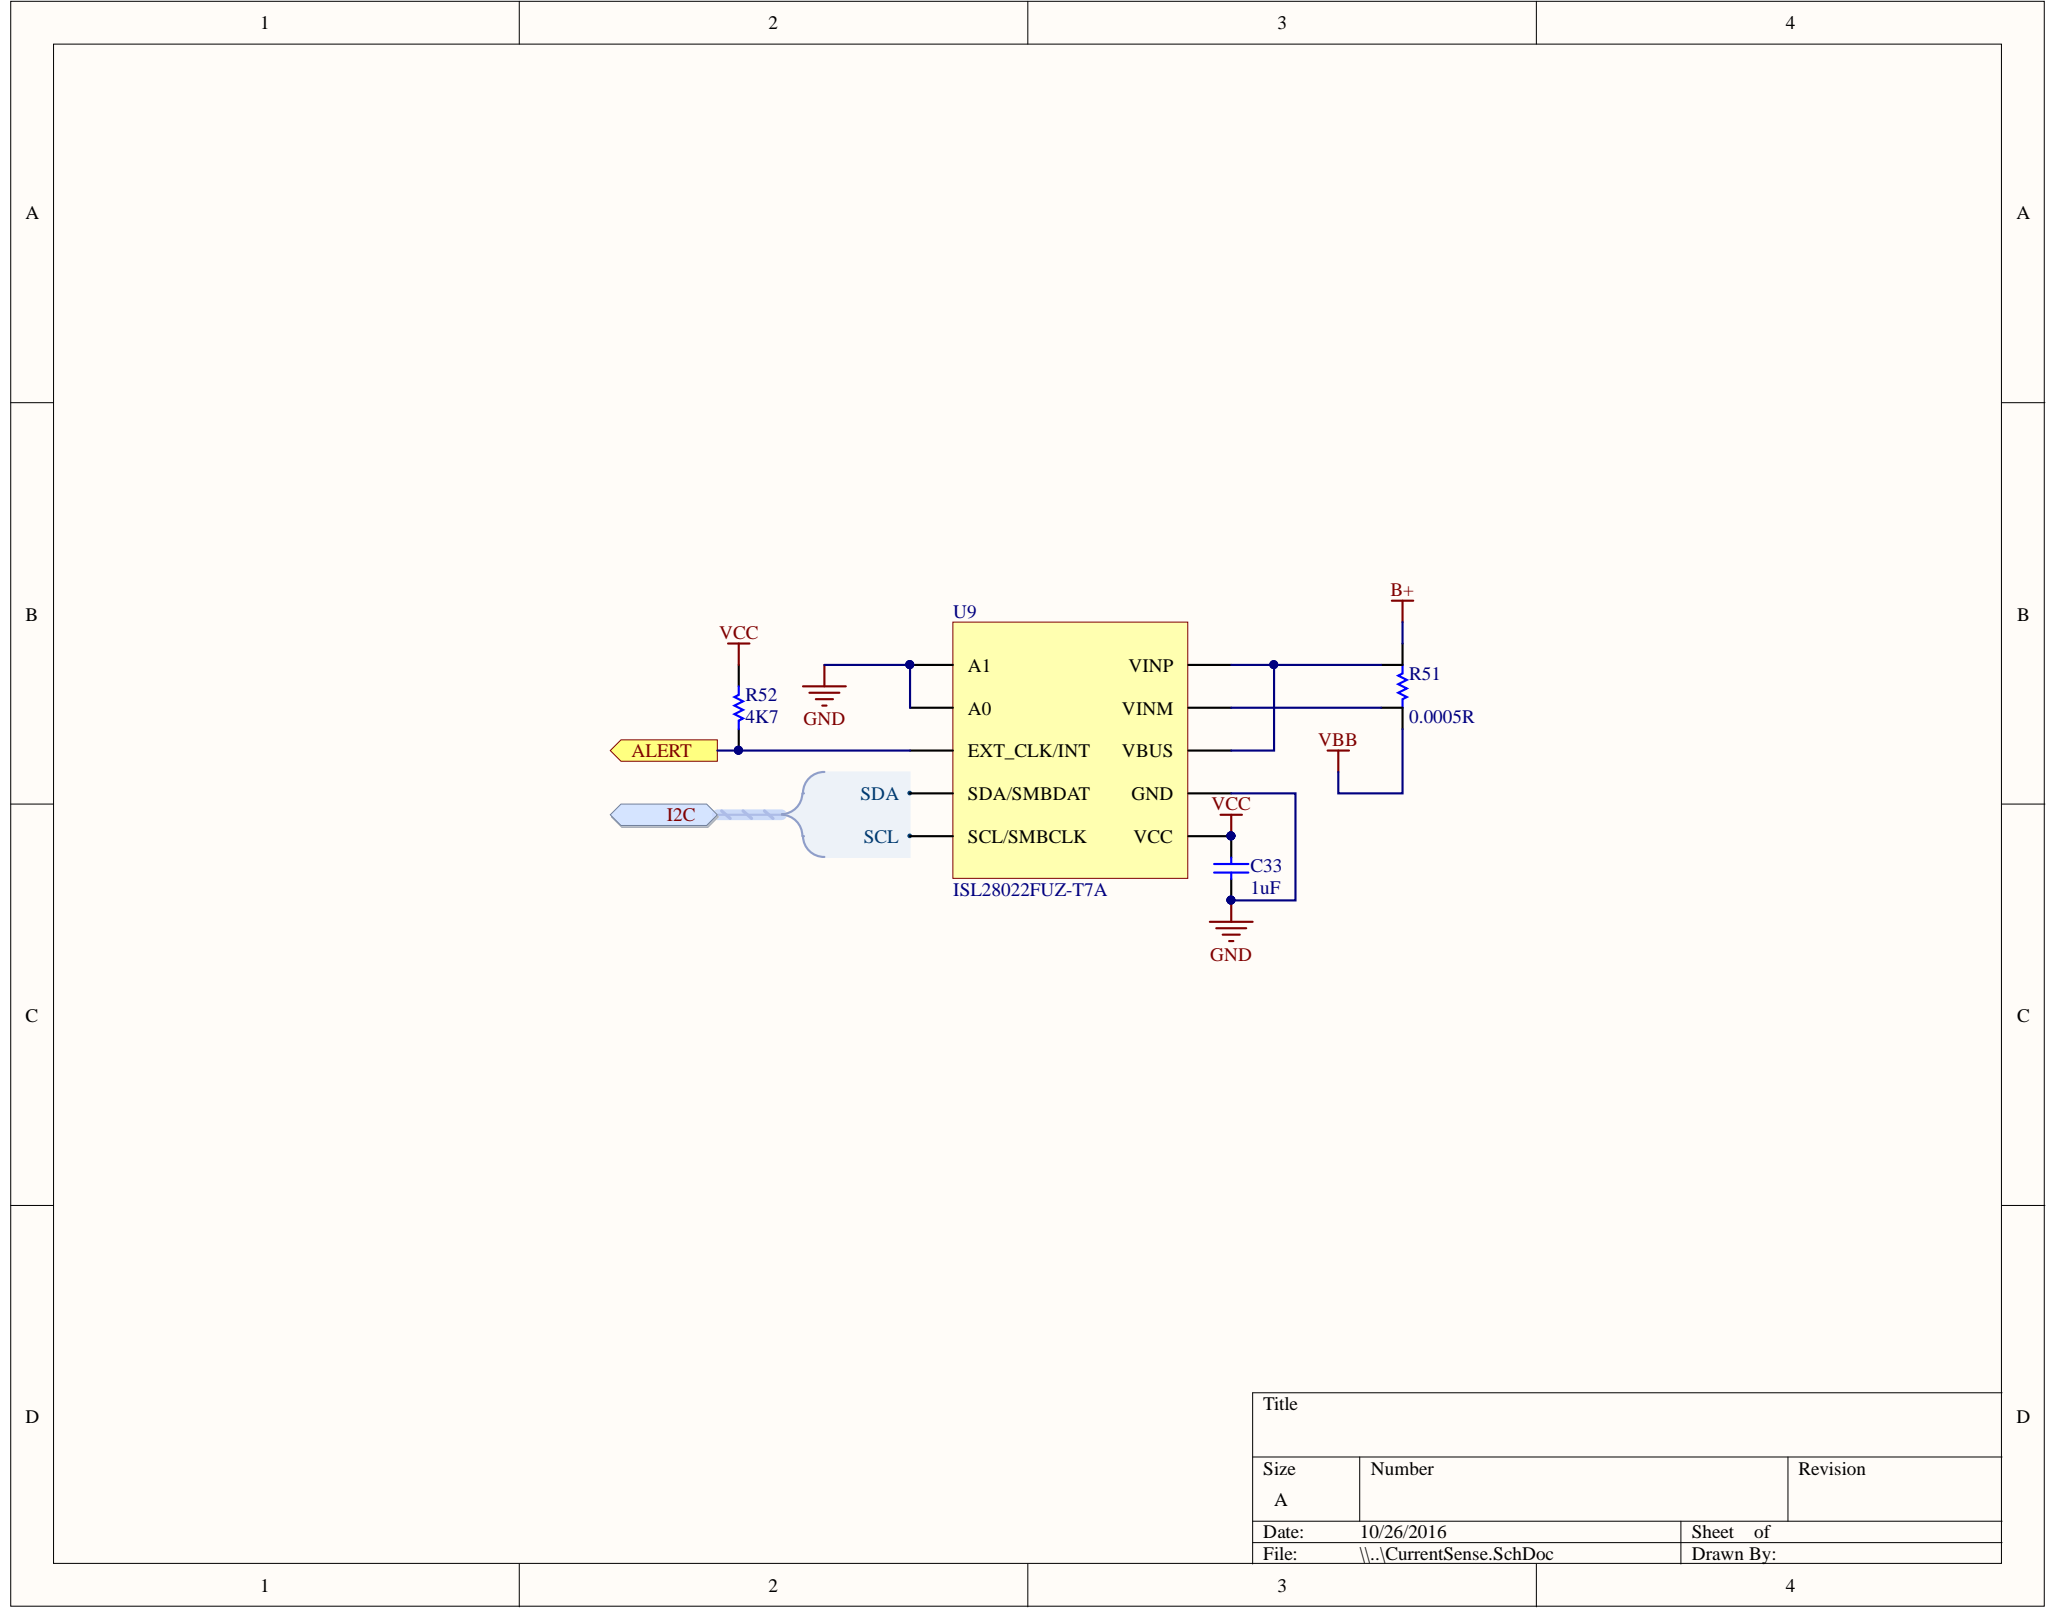



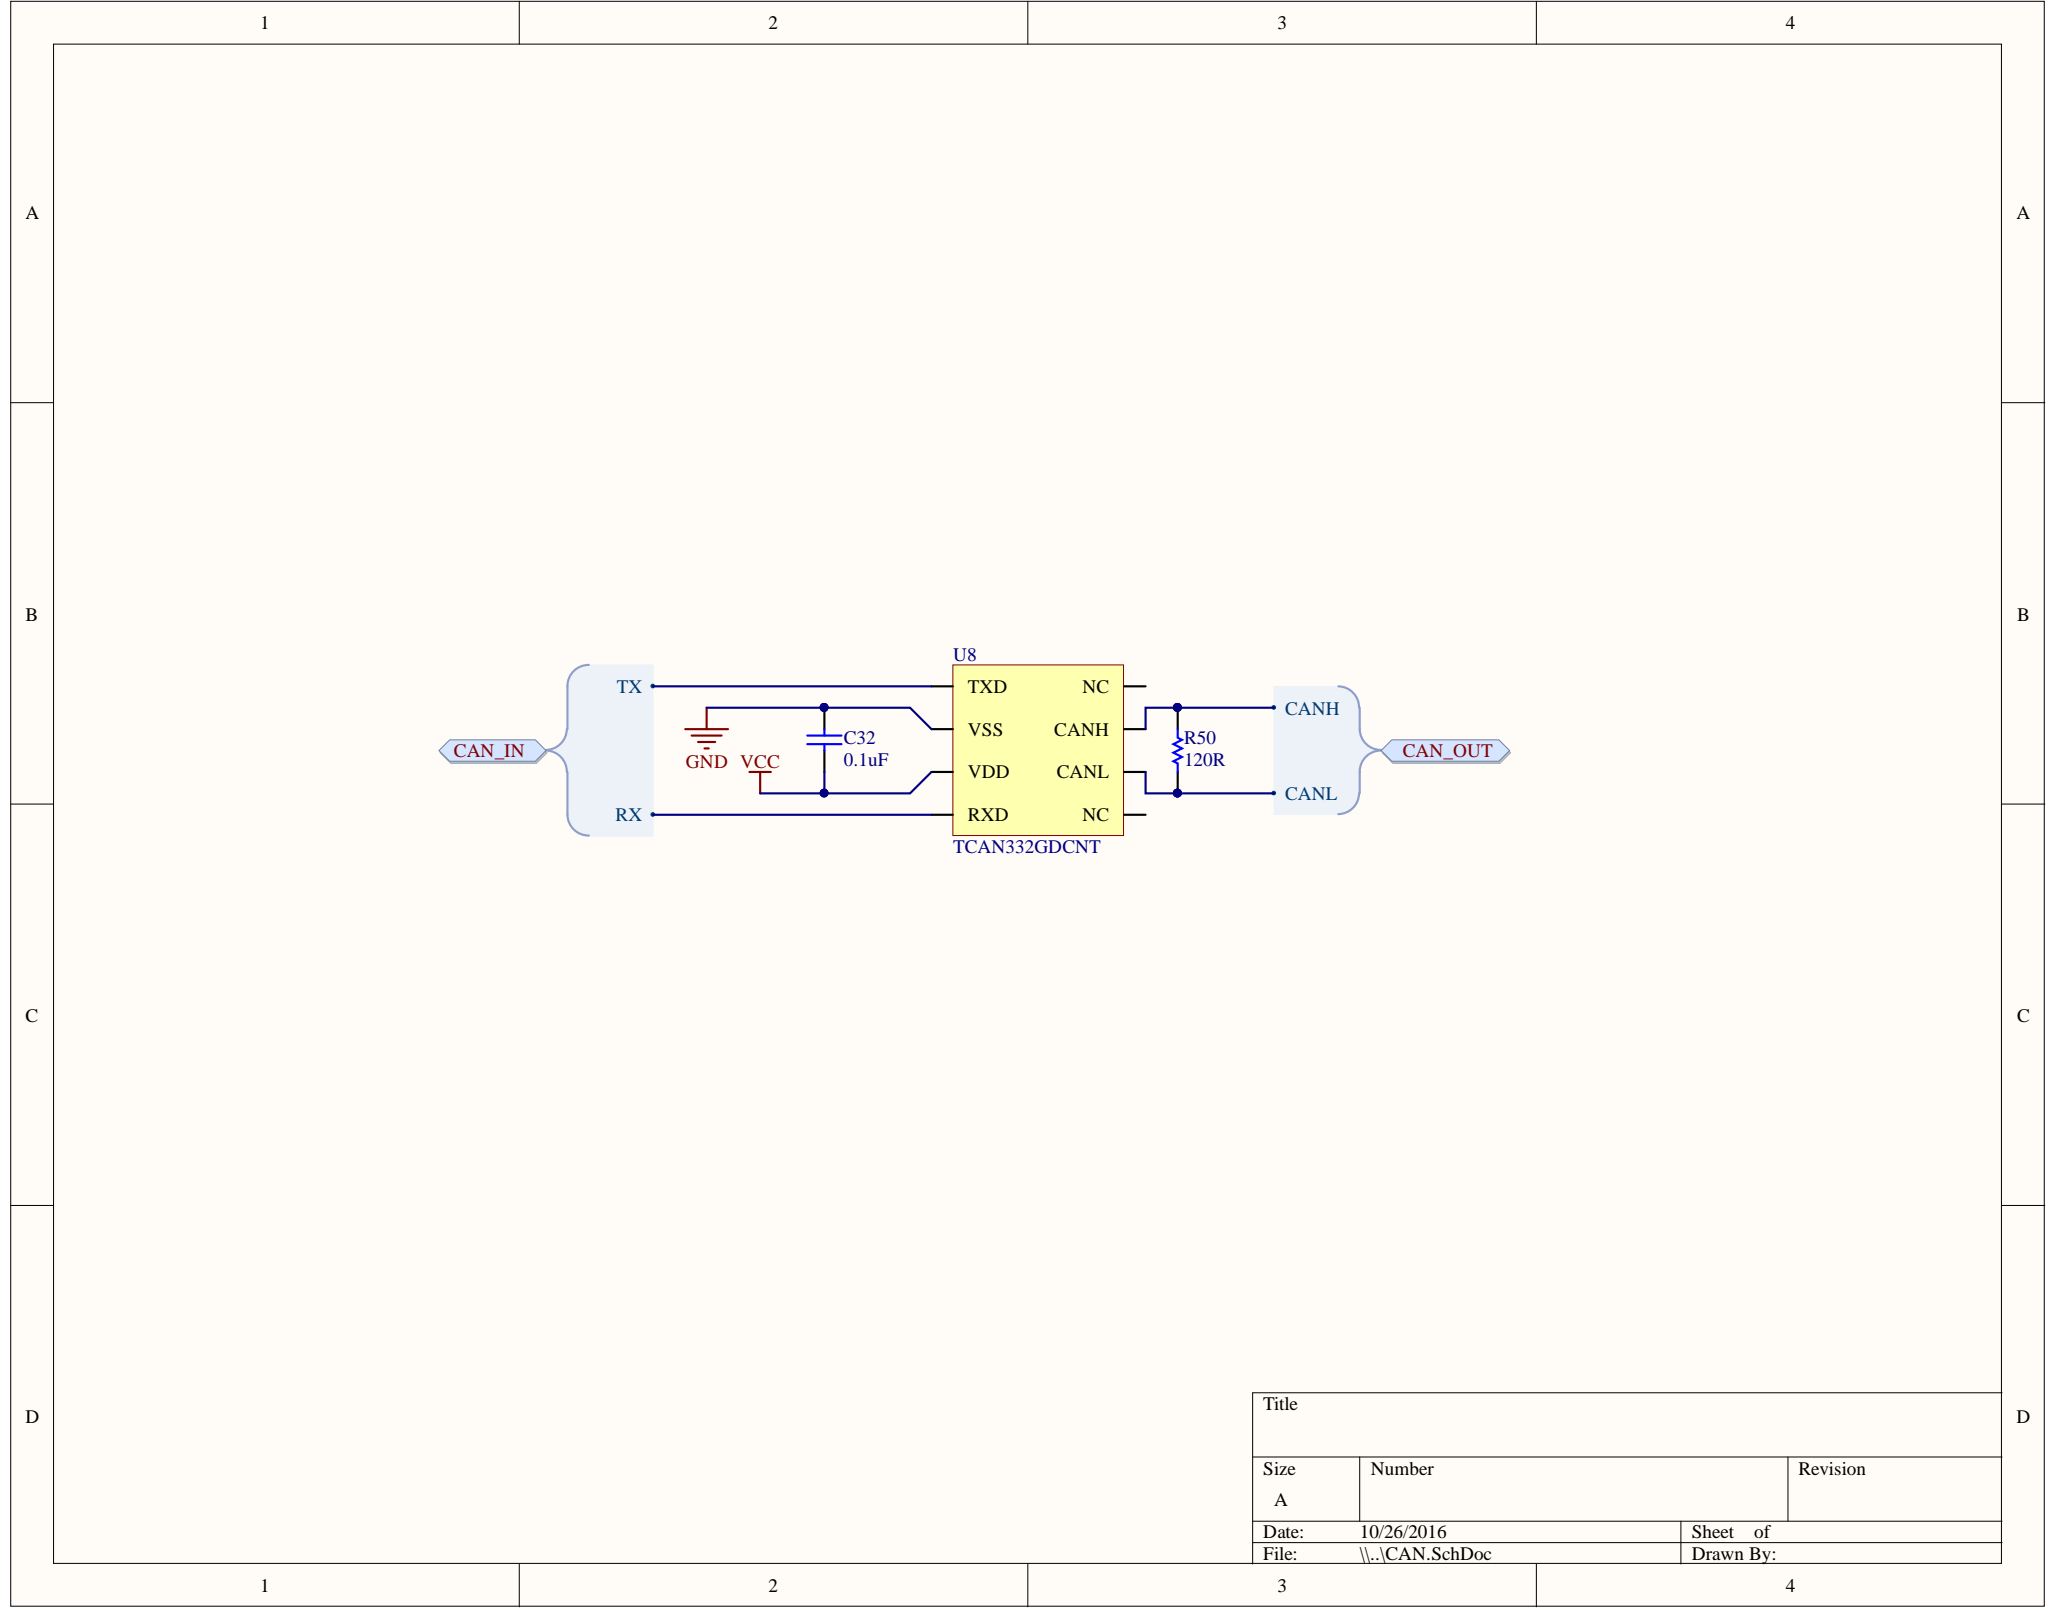

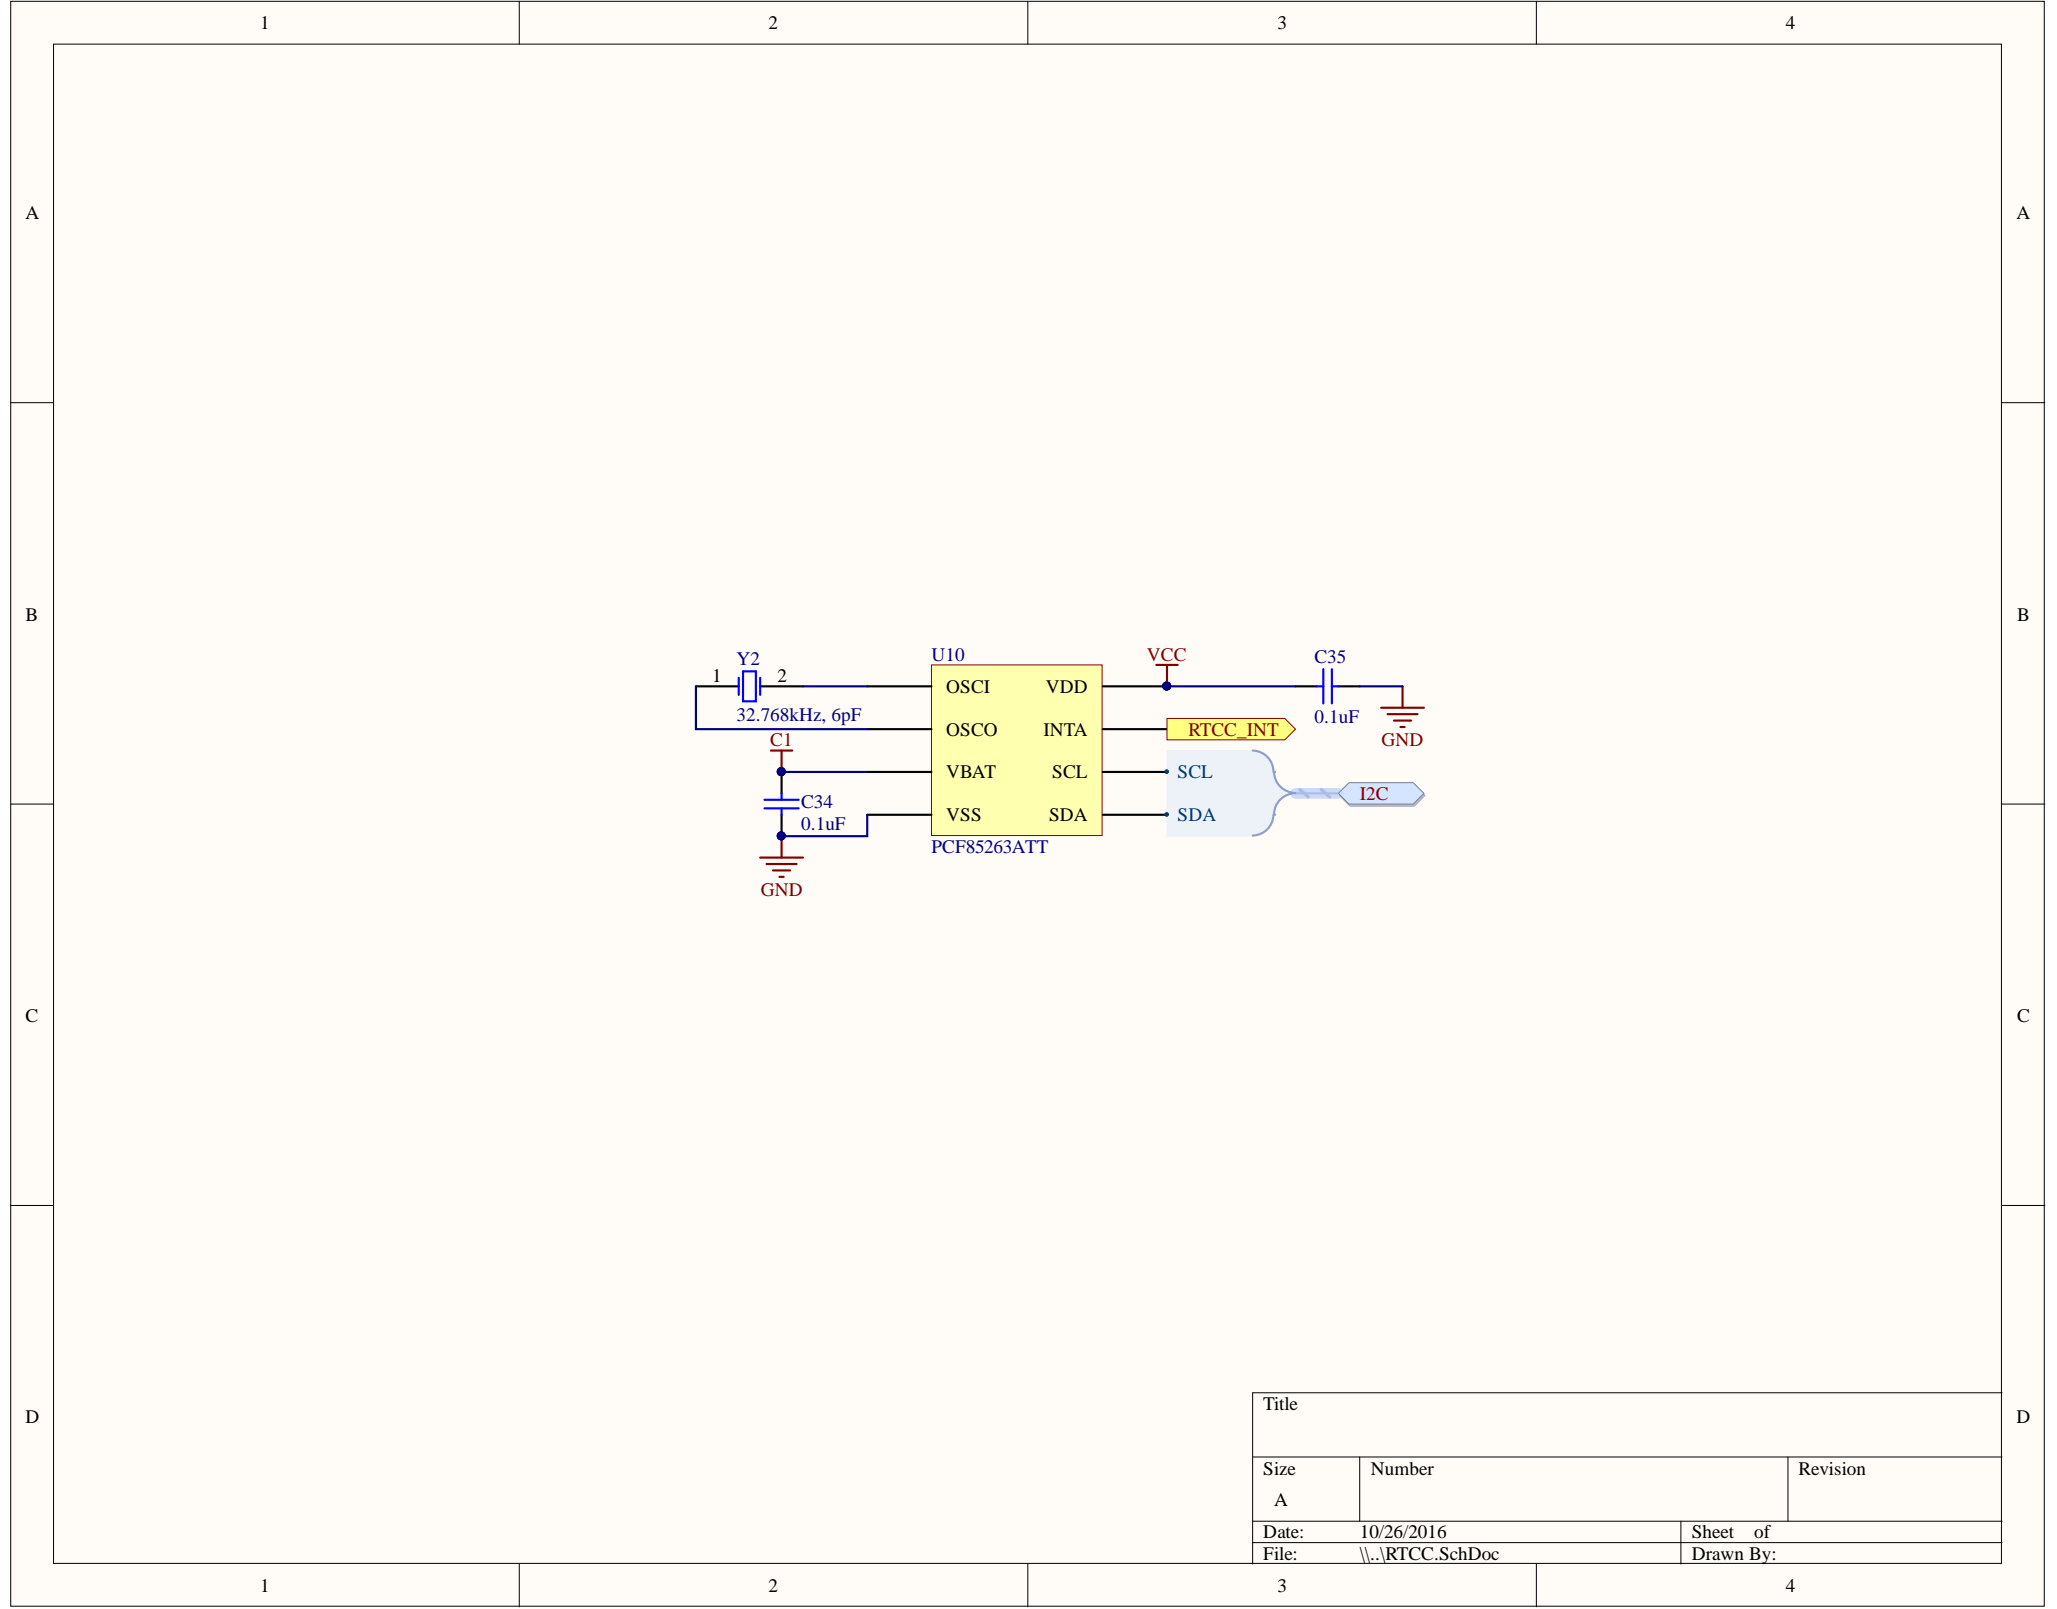

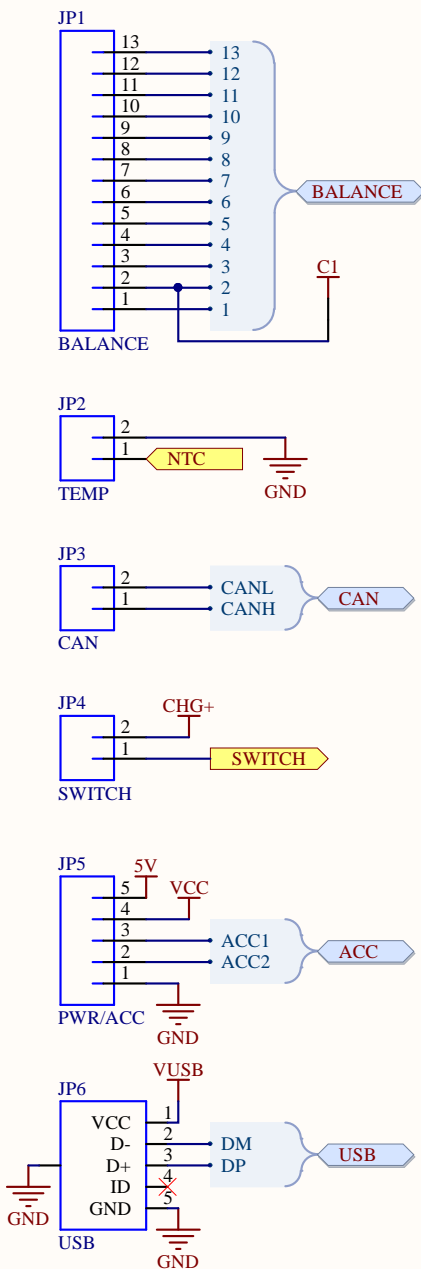

Title		
Size	Number	Revision
A		
Date:	10/26/2016	Sheet of
File:	\\.\Connectors.SchDoc	Drawn By:

