



Title		
Size	Number	Revision
A		
Date:	10/23/2016	Sheet of
File:	\\.\BMS.SchDoc	Drawn By:

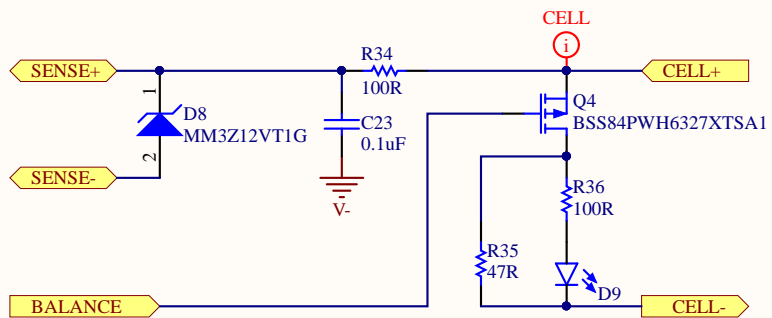


Title		
Size	Number	Revision
A		
Date:	10/23/2016	Sheet of
File:	\\.\Cell.SchDoc	Drawn By:

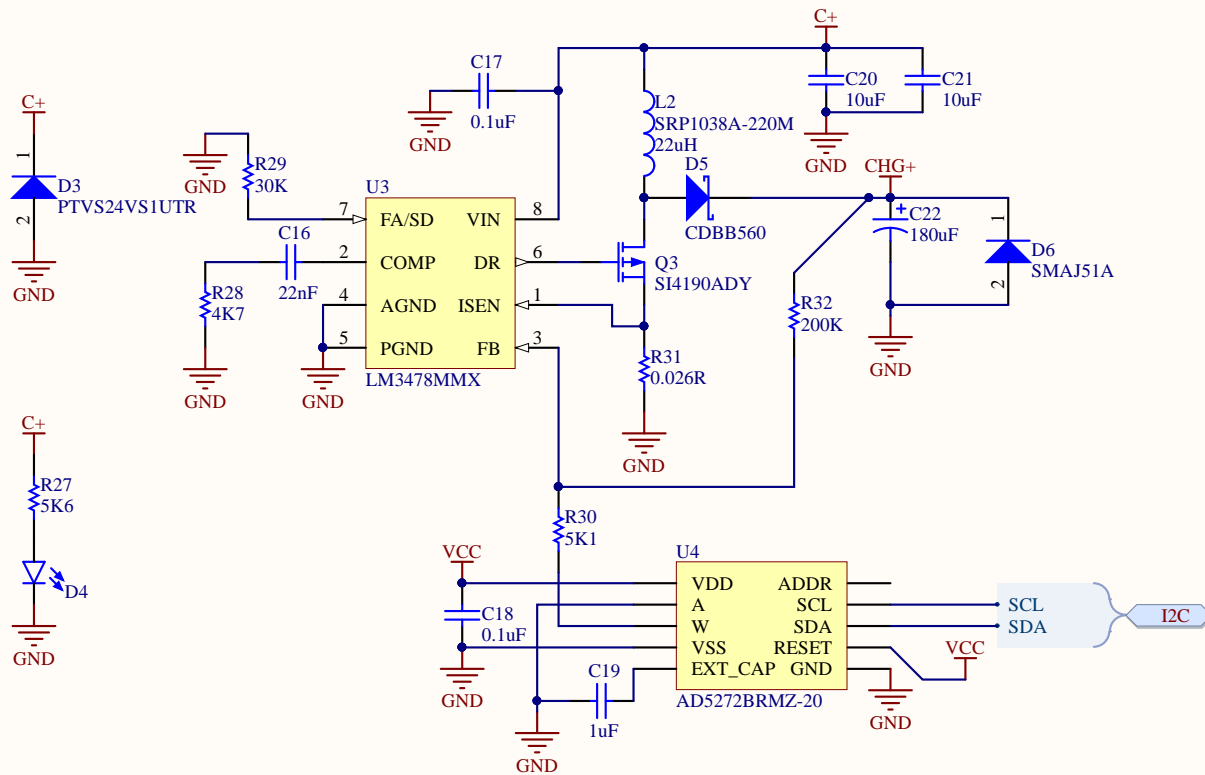

Title		
Size	Number	Revision
A		
Date:	10/23/2016	Sheet of
File:	\\.\Charging.SchDoc	Drawn By:


A

A

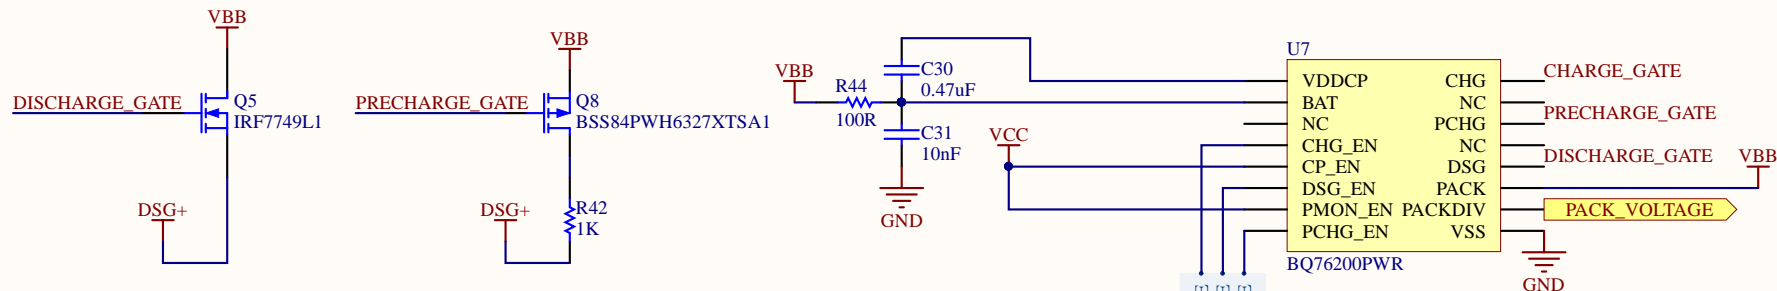

B

B

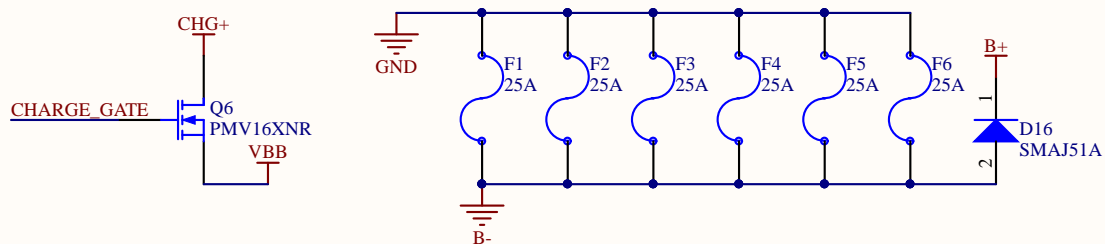


Power Ports:

--
 B+ is tied to battery lead
 VBB is high-side voltage, after current sense
 CHG+ is charger output voltage if available, VBB otherwise
 VDD is toggleable high-side voltage for BMS functions
 VCC is logic-level voltage (3v3)
 DSG+ is discharge output

C


C

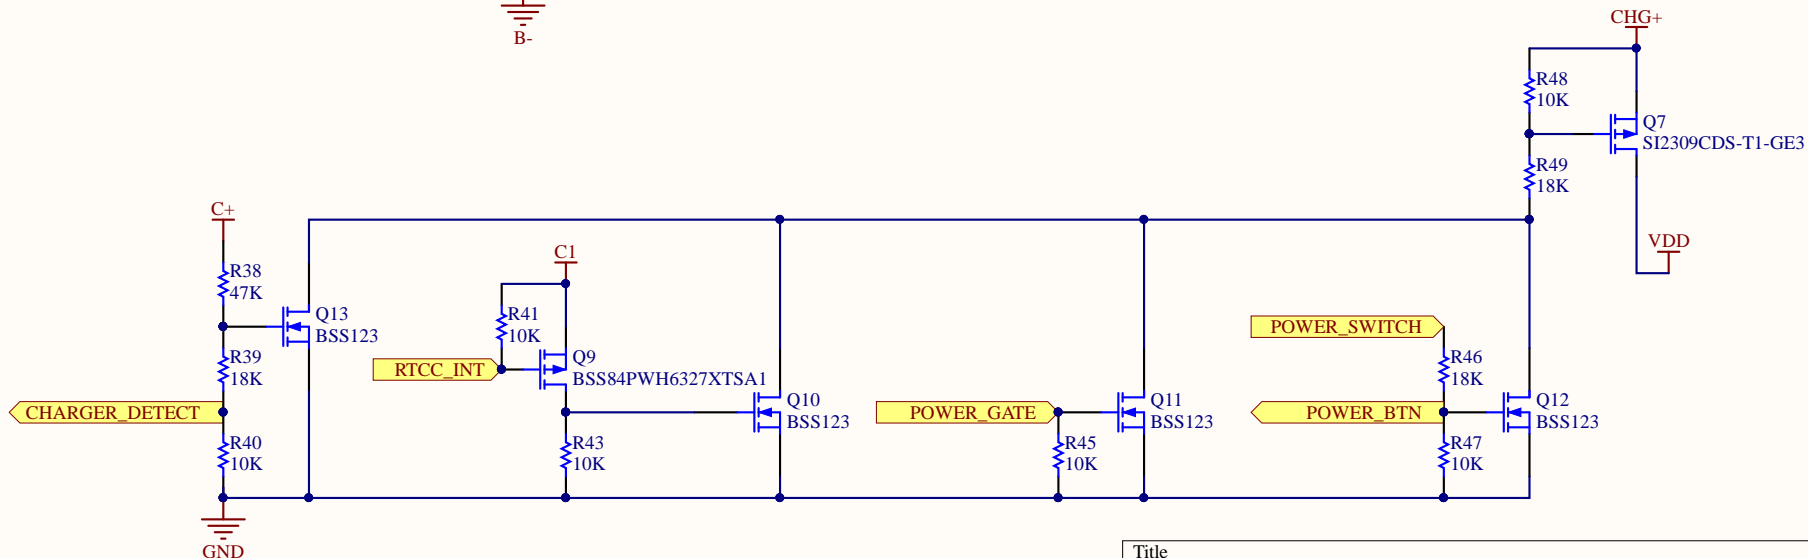


D

D


Title		
Size	Number	Revision
A		
Date:	10/23/2016	Sheet of
File:	\\...\Switches.SchDoc	Drawn By:

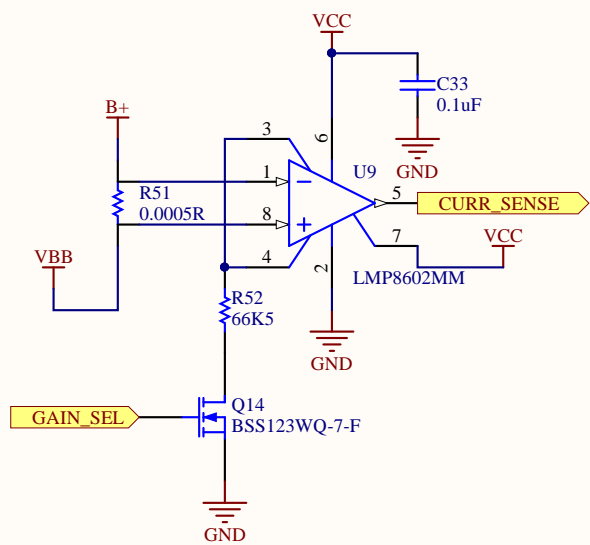


Title		
Size	Number	Revision
A		
Date:	10/23/2016	Sheet of
File:	\\..\CurrentSense.SchDoc	Drawn By:

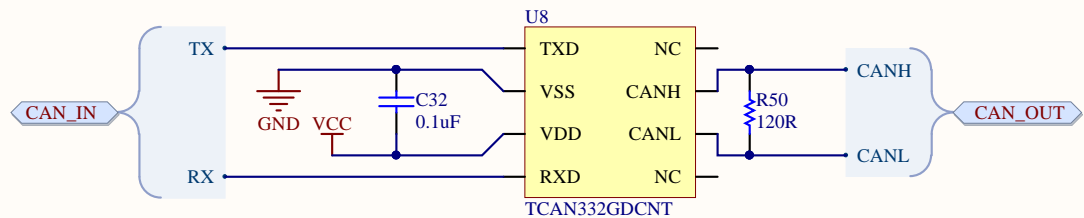

Title		
Size	Number	Revision
A		
Date:	10/23/2016	Sheet of
File:	\\..CAN.SchDoc	Drawn By:

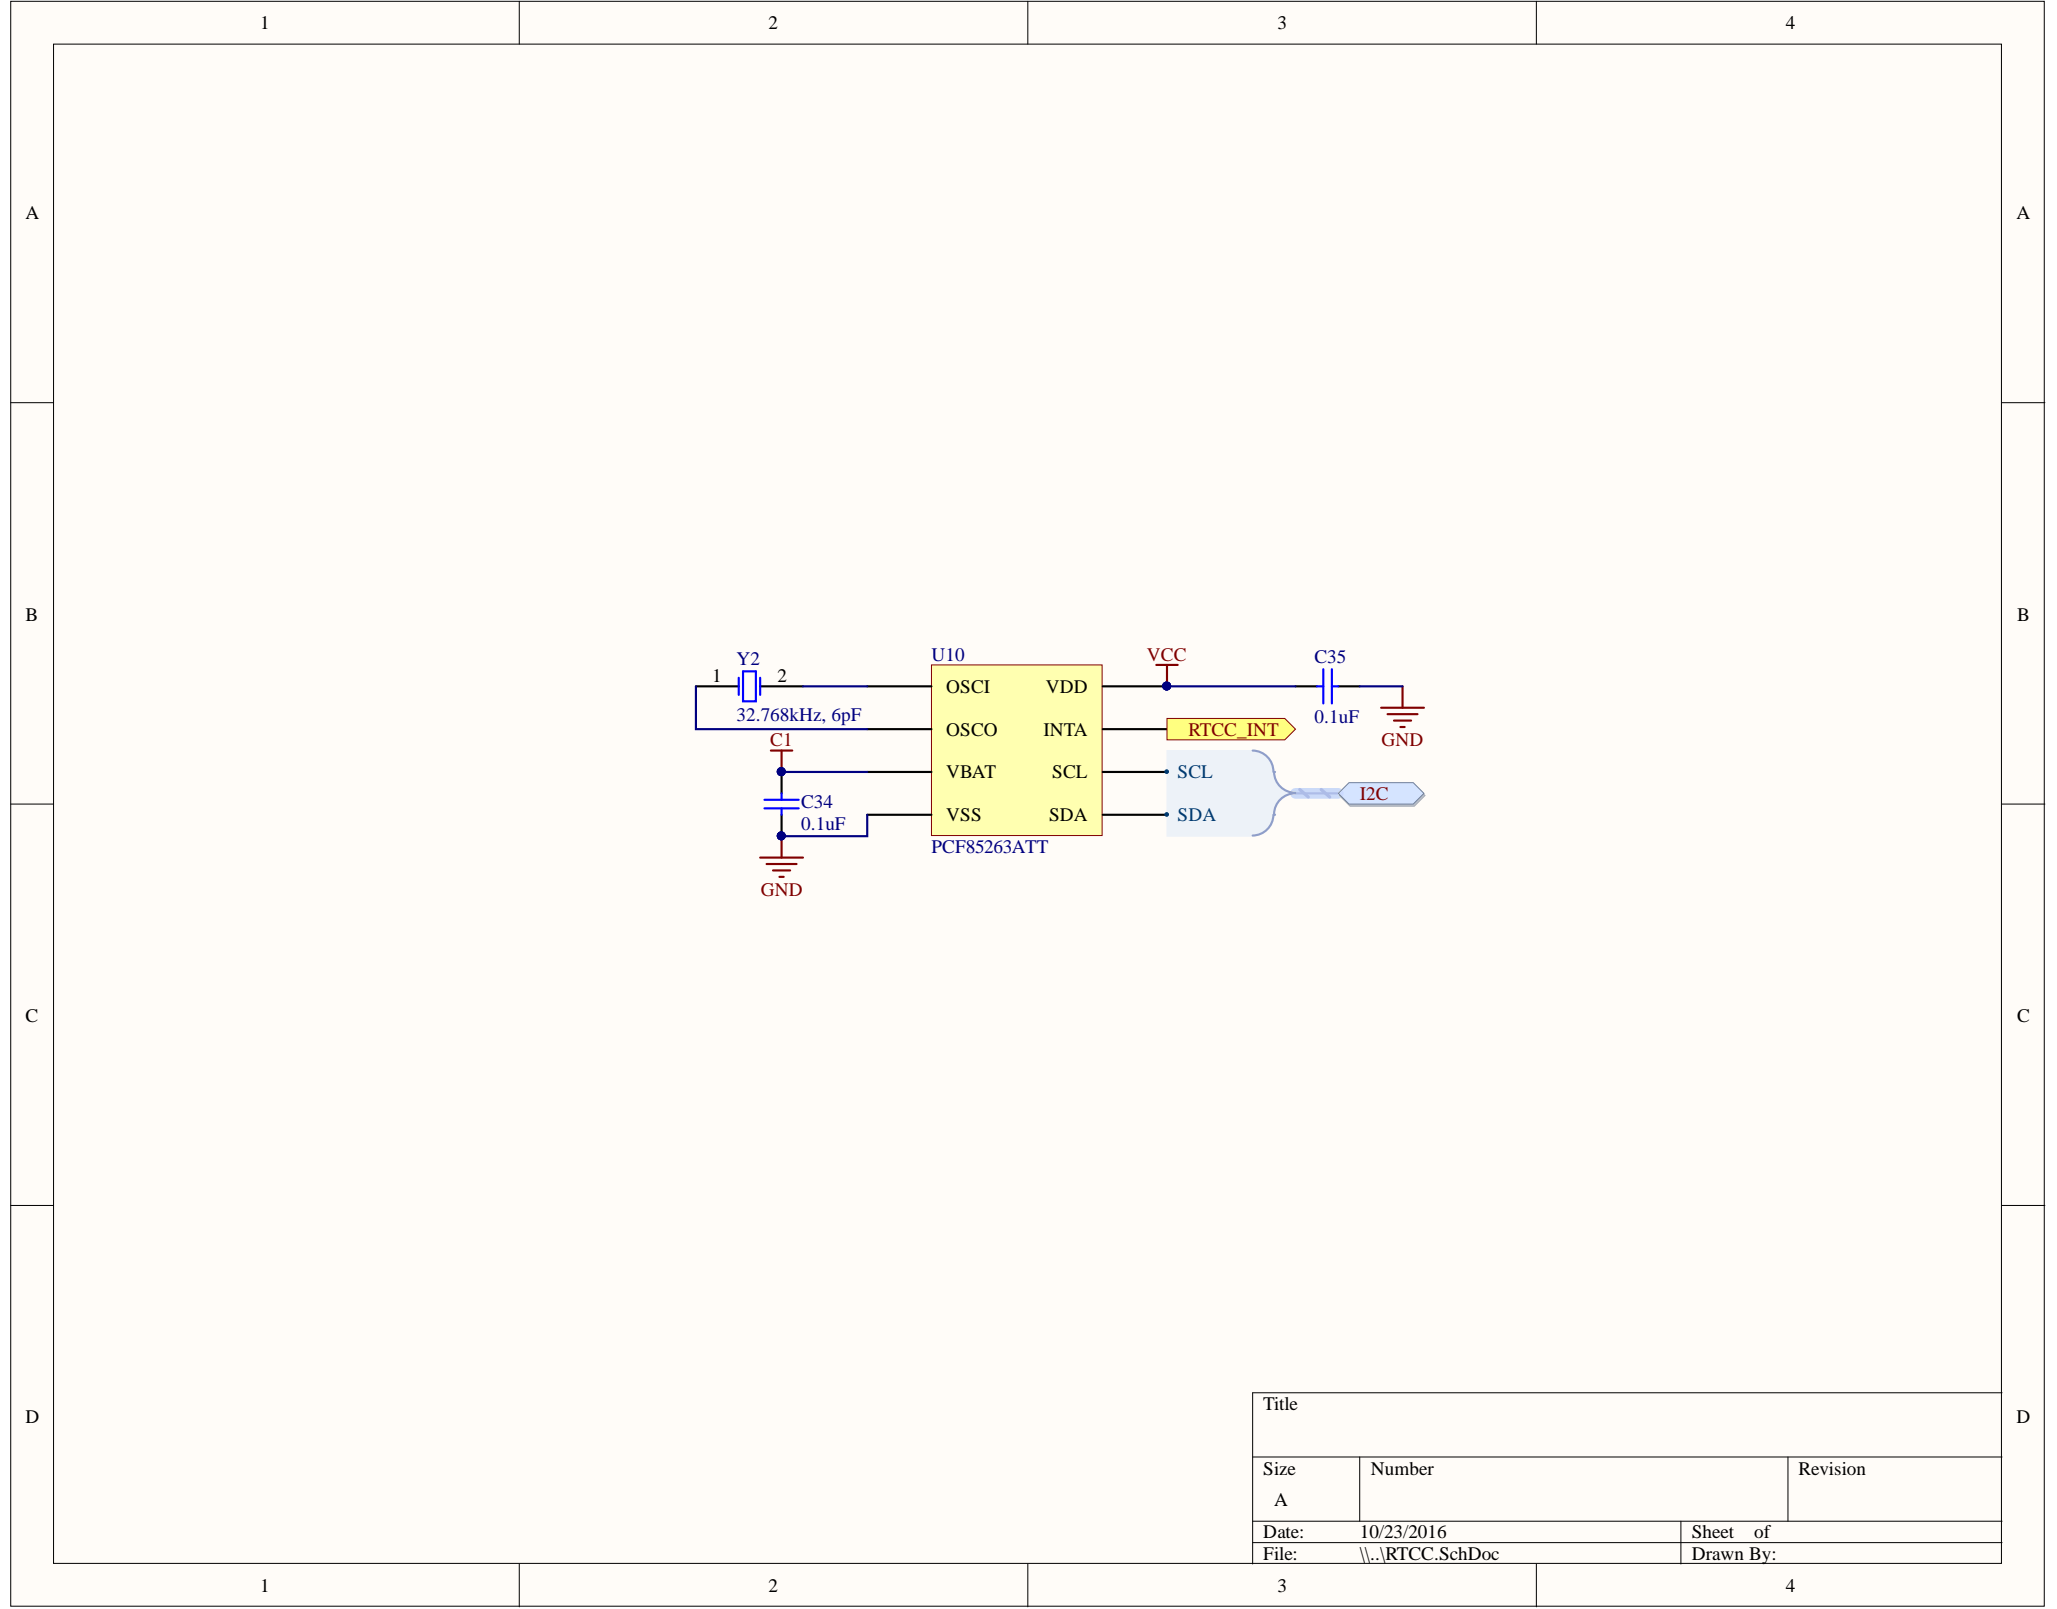

Title		
Size	Number	Revision
A		
Date:	10/23/2016	Sheet of
File:	\\..RTCC.SchDoc	Drawn By:

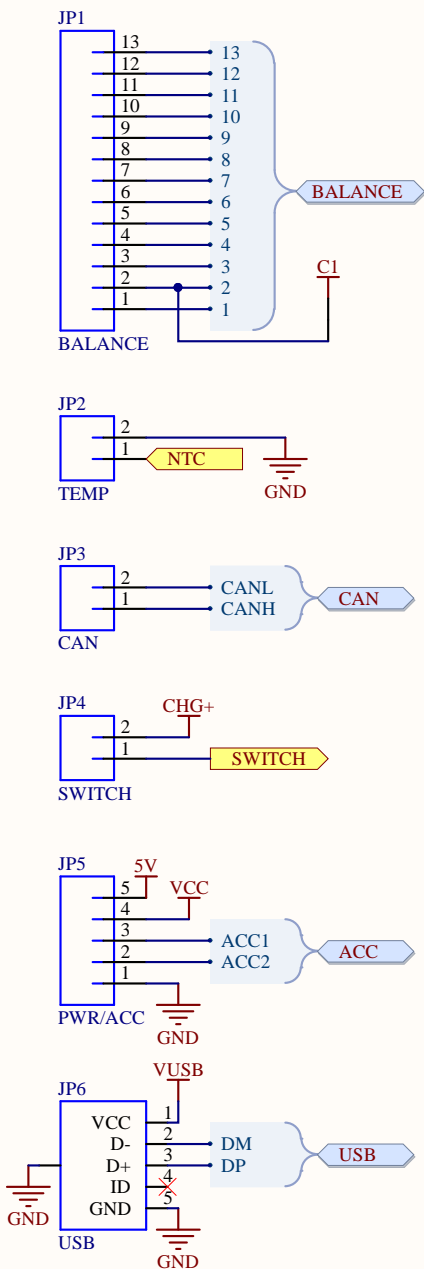

Title		
Size	Number	Revision
A		
Date:	10/23/2016	Sheet of
File:	\\.\Connectors.SchDoc	Drawn By:

