
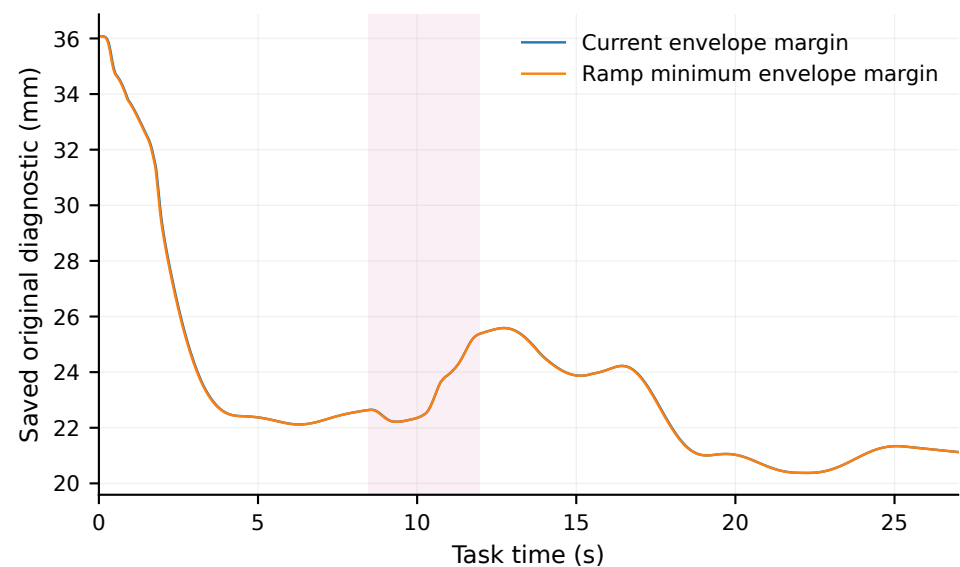
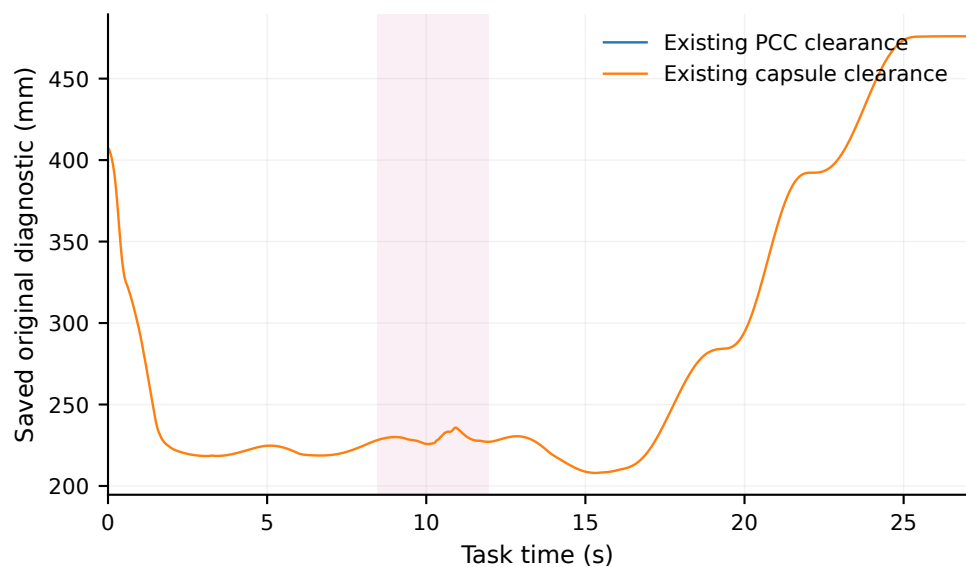
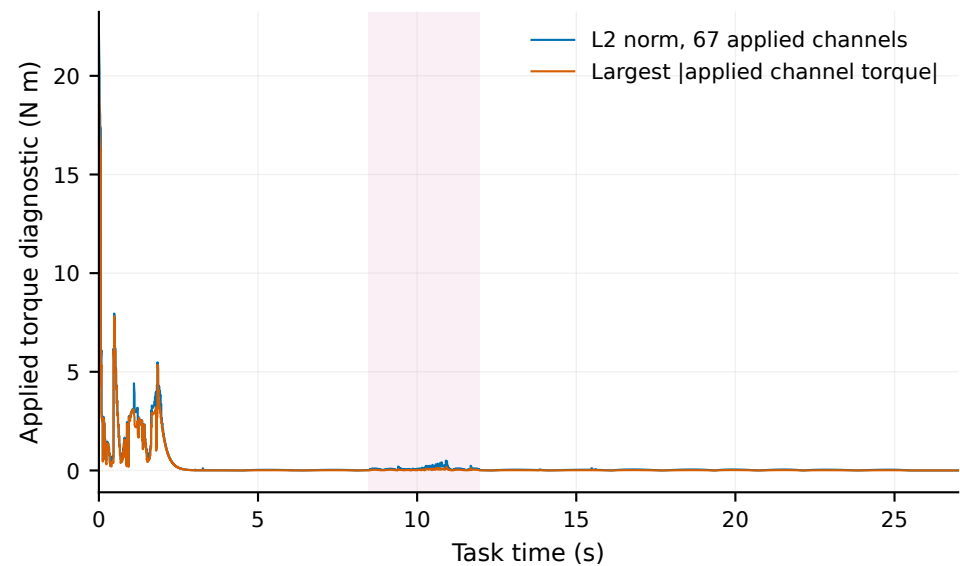


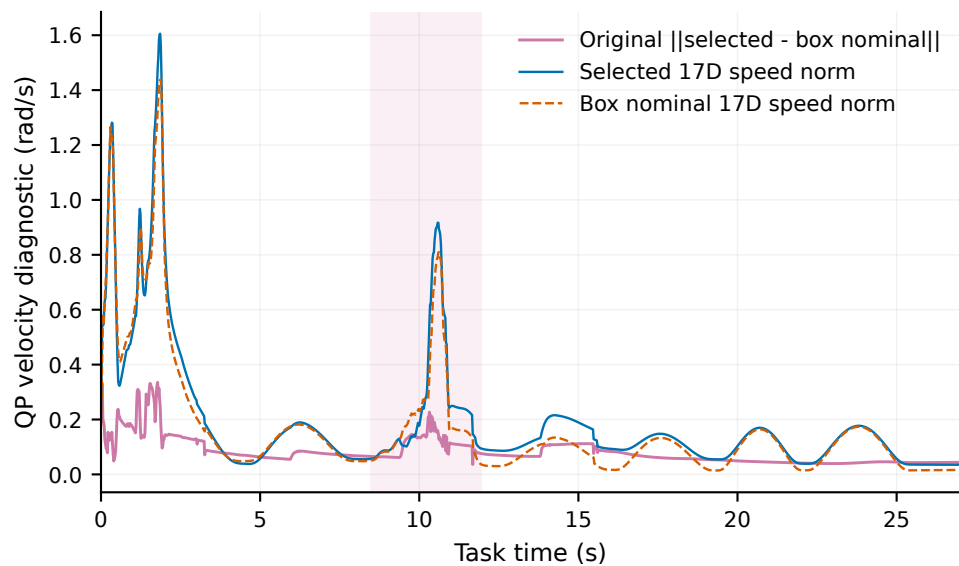

EA_27 | d=55 mm, c- | v2_minus20 | complete actual + original Task/safety passed
 QP/PCC/interval diagnostics: saved consumed 20 ms ticks. Torque: original applied 2 ms intervals, labeled by interval end.
 Six reused slots have no new QP vectors; no reconstruction. PCC, capsule and interval margins retain their distinct original scopes.