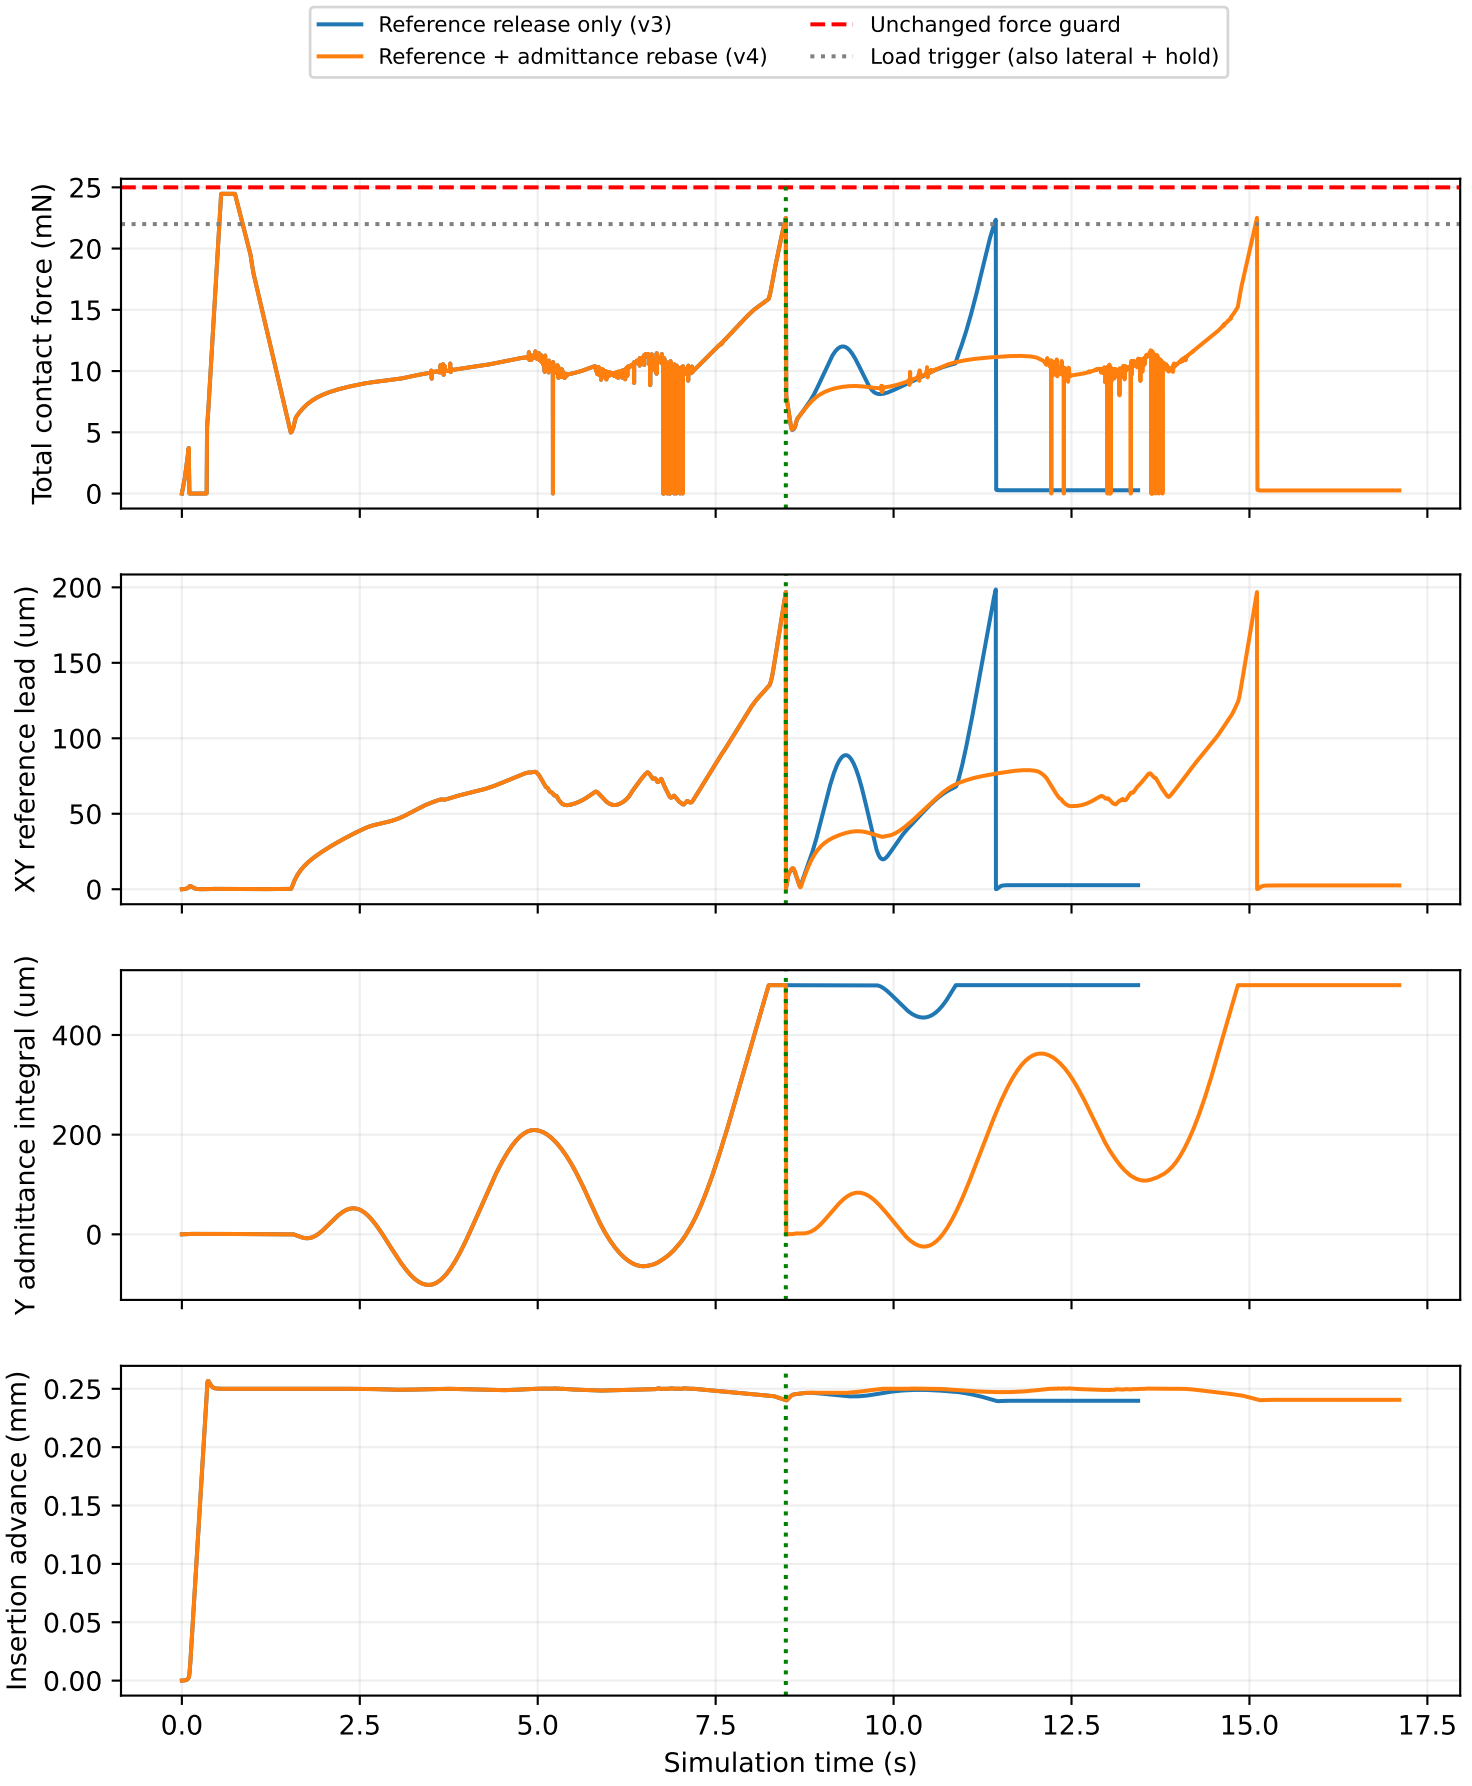
Development case -Y 150 um: coordinated reference / admittance rebase
Reference release only (v3)
Reference + admittance rebase (v4)
Unchanged force guard
Load trigger (also lateral + hold)
Total contact force (mN)
XY reference lead (um)
Y admittance integral (um)
Insertion advance (mm)
Simulation time (s)