


4.053 Combined Bearing

Family: Standard

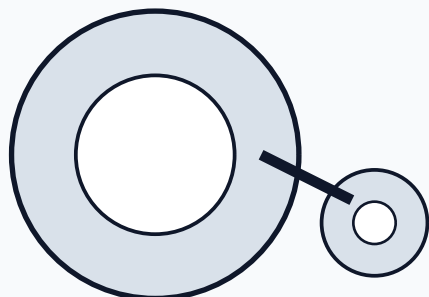

4.053

Combined roller bearing

Configuration illustration - not to scale

Compact standard combined bearing for forklift masts, steel profiles and material-handling guide systems.

Typical application: Forklift masts, stackers, telescopic columns and light-to-medium linear guide systems.

Common references: JD52.5-33 / TR050.0200 / MR0706 / 400-0053

Catalog dimensions and ratings

Parameter	Catalog value	Parameter	Catalog value
d	30 mm	D	52.5 mm
H	33 mm	h	27 mm
B	17 mm	S	16 mm
A	3 mm	r	2 mm
T	40 mm	FR	5.23 kN
FA	1.68 kN	Cr	24 kN
C0r	32 kN	Ca	7 kN
C0a	7 kN	nG	800 rpm
Mass	0.46 kg		

Quotation verification

- Confirm the complete designation, suffix and marking photographs.
- Verify d, D, H, h, B, S, T and every mounting interface on the controlled drawing.
- Check radial and axial load, speed, shock, duty cycle, profile and lubrication.
- Agree inspection records, marking and packing scope before order.

Identification reference only. This sheet is not a controlled manufacturing drawing, interchange approval or batch inspection certificate. Final supply is governed by the confirmed quotation and controlled drawing.