


4.054 Combined Bearing

Family: Standard

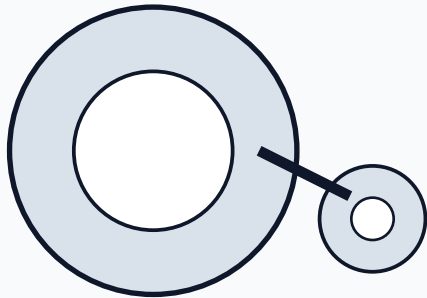

4.054

Combined roller bearing

Configuration illustration - not to scale

Standard fixed-axial combined bearing in the 62.5 mm outside-diameter class.

Typical application: Forklift mast channels, warehouse equipment and steel-section guide assemblies.

Common references: MR0021 / MR0430 / JD62-37.5 / JD62.5-37.5 / 400-0054 / TR060.0200

Catalog dimensions and ratings

Parameter	Catalog value	Parameter	Catalog value
d	30 mm	D	62.5 mm
H	37.5 mm	h	30.5 mm
B	20 mm	S	20 mm
A	2.5 mm	r	3 mm
T	42 mm	FR	10.30 kN
FA	3.20 kN	Cr	31 kN
C0r	35.5 kN	Ca	11 kN
C0a	11 kN	nG	900 rpm
Mass	0.53 kg		

Quotation verification

- Confirm the complete designation, suffix and marking photographs.
- Verify d, D, H, h, B, S, T and every mounting interface on the controlled drawing.
- Check radial and axial load, speed, shock, duty cycle, profile and lubrication.
- Agree inspection records, marking and packing scope before order.

Identification reference only. This sheet is not a controlled manufacturing drawing, interchange approval or batch inspection certificate. Final supply is governed by the confirmed quotation and controlled drawing.