


4.055 Combined Bearing

Family: Standard

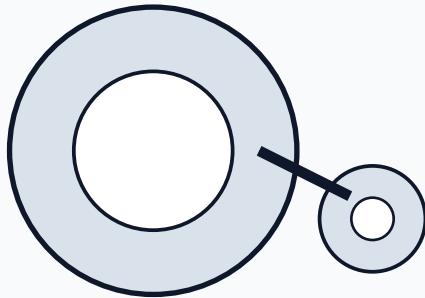

4.055

Combined roller bearing

Configuration illustration - not to scale

Standard combined roller bearing for radial and axial guidance in lift-truck mast profiles.

Typical application: Forklift masts, pallet stackers, conveying frames and vertical lifting guides.

Common references: MR0022 / JD70.1-44 / 400-0055 / TR070.0200

Catalog dimensions and ratings

Parameter	Catalog value	Parameter	Catalog value
d	35 mm	D	70.1 mm
H	44 mm	h	36 mm
B	23 mm	S	22 mm
A	2.5 mm	r	4 mm
T	48 mm	FR	12.4 kN
FA	3.87 kN	Cr	45.5 kN
C0r	51 kN	Ca	13 kN
C0a	14 kN	nG	900 rpm
Mass	0.8 kg		

Quotation verification

- Confirm the complete designation, suffix and marking photographs.
- Verify d, D, H, h, B, S, T and every mounting interface on the controlled drawing.
- Check radial and axial load, speed, shock, duty cycle, profile and lubrication.
- Agree inspection records, marking and packing scope before order.

Identification reference only. This sheet is not a controlled manufacturing drawing, interchange approval or batch inspection certificate. Final supply is governed by the confirmed quotation and controlled drawing.