


4.056 Combined Bearing

Family: Standard

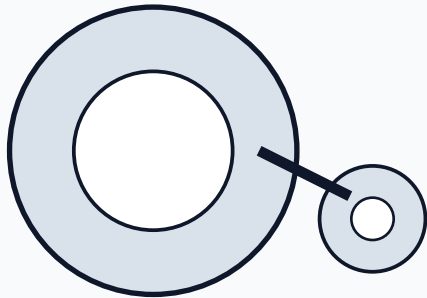

4.056

Combined roller bearing

Configuration illustration - not to scale

Standard combined bearing with a 77.7 mm outside diameter for medium-duty mast and guide systems.

Typical application: Material-handling masts, lifting columns, AS/RS systems and steel guide profiles.

Common references: MR0023 / MR0003 / JD77.7-48 / 400-0056 / TR080.0200

Catalog dimensions and ratings

Parameter	Catalog value	Parameter	Catalog value
d	40 mm	D	77.7 mm
H	48 mm	h	36.5 mm
B	23 mm	S	24 mm
A	3 mm	r	4 mm
T	54 mm	FR	12.9 kN
FA	4 kN	Cr	48 kN
C0r	56.8 kN	Ca	18 kN
C0a	18 kN	nG	800 rpm
Mass	1 kg		

Quotation verification

- Confirm the complete designation, suffix and marking photographs.
- Verify d, D, H, h, B, S, T and every mounting interface on the controlled drawing.
- Check radial and axial load, speed, shock, duty cycle, profile and lubrication.
- Agree inspection records, marking and packing scope before order.

Identification reference only. This sheet is not a controlled manufacturing drawing, interchange approval or batch inspection certificate. Final supply is governed by the confirmed quotation and controlled drawing.