


4.057 Combined Bearing

Family: Standard

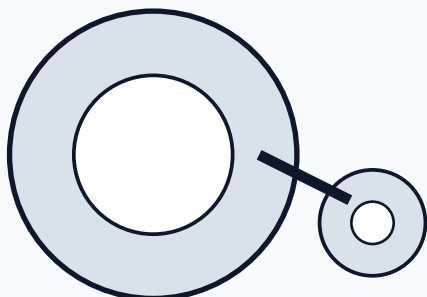

4.057

Combined roller bearing

Configuration illustration - not to scale

Low-profile standard combined bearing with a 77.7 mm radial roller outside diameter.

Typical application: Forklift masts, compact lift guides and steel-section linear systems.

Common references: JD77.7-40 / 400-0057

Catalog dimensions and ratings

Parameter	Catalog value	Parameter	Catalog value
d	40 mm	D	77.7 mm
H	40 mm	Design	Fixed axial combined bearing
Material	20CrMnTi		

Quotation verification

- Confirm the complete designation, suffix and marking photographs.
- Verify d, D, H, h, B, S, T and every mounting interface on the controlled drawing.
- Check radial and axial load, speed, shock, duty cycle, profile and lubrication.
- Agree inspection records, marking and packing scope before order.

Identification reference only. This sheet is not a controlled manufacturing drawing, interchange approval or batch inspection certificate. Final supply is governed by the confirmed quotation and controlled drawing.