


4.063 / 4.0063 Combined Bearing

Family: Standard

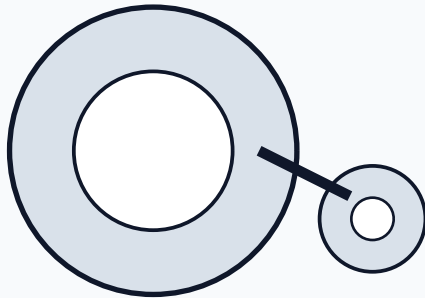

4.063 / 4.0063

Combined roller bearing

Configuration illustration - not to scale

Large combined mast guide bearing with a 149 mm outside diameter for demanding material-handling systems.

Typical application: Heavy forklift trucks, cranes, hoists, palletizers, AS/RS systems and vertical lift units.

Common references: TR010 / MR0010 / MR010 / MR0030 / JD149-78.5 / 400-0063 / TR150.0200

Catalog dimensions and ratings

Parameter	Catalog value	Parameter	Catalog value
d	60 mm	D	149 mm
H	78.5 mm	h	58.5 mm
B	45 mm	S	50 mm
A	5.5 mm	r	3 mm
T	103 / 108 mm	Material	20CrMnTi

Quotation verification

- Confirm the complete designation, suffix and marking photographs.
- Verify d, D, H, h, B, S, T and every mounting interface on the controlled drawing.
- Check radial and axial load, speed, shock, duty cycle, profile and lubrication.
- Agree inspection records, marking and packing scope before order.

Identification reference only. This sheet is not a controlled manufacturing drawing, interchange approval or batch inspection certificate. Final supply is governed by the confirmed quotation and controlled drawing.