


4.454 Combined Bearing

Family: Eccentric adjustable

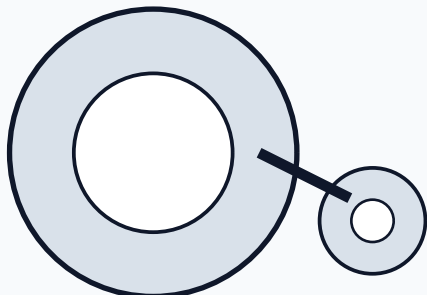

4.454

Combined roller bearing

Configuration illustration - not to scale

Eccentric-adjustable counterpart to the 4.054 size class for track clearance setting in mast channels.

Typical application: Forklift mast channels, warehouse equipment and steel-section guide assemblies requiring axial adjustment.

Common references: KB4.054 / 400-0454

Catalog dimensions and ratings

Parameter	Catalog value	Parameter	Catalog value
d	30 mm	D	62.5 mm
H	37.5 mm	h	30.5 mm
B	20 mm	S	20 mm
T	42 mm	FixedCounterpart	4.054
Adjustment	Eccentric axial roller	Material	20CrMnTi

Quotation verification

- Confirm the complete designation, suffix and marking photographs.
- Verify d, D, H, h, B, S, T and every mounting interface on the controlled drawing.
- Check radial and axial load, speed, shock, duty cycle, profile and lubrication.
- Agree inspection records, marking and packing scope before order.

Identification reference only. This sheet is not a controlled manufacturing drawing, interchange approval or batch inspection certificate. Final supply is governed by the confirmed quotation and controlled drawing.