


4.457 Combined Bearing

Family: Eccentric adjustable

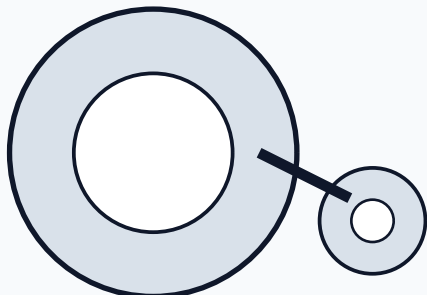

4.457

Combined roller bearing

Configuration illustration - not to scale

Low-profile eccentric combined bearing for constrained guide assemblies in the 4.057 size class.

Typical application: Compact lift guides, forklift masts and low-profile steel-section systems.

Common references: KB4.057 / 400-0457

Catalog dimensions and ratings

Parameter	Catalog value	Parameter	Catalog value
d	40 mm	D	77.7 mm
H	40 mm	FixedCounterpart	4.057
Adjustment	Eccentric axial roller	Material	20CrMnTi

Quotation verification

- Confirm the complete designation, suffix and marking photographs.
- Verify d, D, H, h, B, S, T and every mounting interface on the controlled drawing.
- Check radial and axial load, speed, shock, duty cycle, profile and lubrication.
- Agree inspection records, marking and packing scope before order.

Identification reference only. This sheet is not a controlled manufacturing drawing, interchange approval or batch inspection certificate. Final supply is governed by the confirmed quotation and controlled drawing.