


4.459 Combined Bearing

Family: Eccentric adjustable

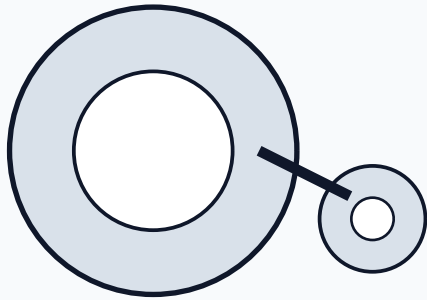

4.459

Combined roller bearing

Configuration illustration - not to scale

Eccentric combined bearing for plate-mounted and mast guide systems in the 4.059 size class.

Typical application: Forklift masts, welded plate assemblies and logistics guide systems.

Common references: KB4.059 / 400-0459

Catalog dimensions and ratings

Parameter	Catalog value	Parameter	Catalog value
d	50 mm	D	101.2 mm
H	46 mm	h	33 mm
B	28 mm	S	30 mm
T	67 mm	FixedCounterpart	4.059
Adjustment	Eccentric axial roller	Material	20CrMnTi

Quotation verification

- Confirm the complete designation, suffix and marking photographs.
- Verify d, D, H, h, B, S, T and every mounting interface on the controlled drawing.
- Check radial and axial load, speed, shock, duty cycle, profile and lubrication.
- Agree inspection records, marking and packing scope before order.

Identification reference only. This sheet is not a controlled manufacturing drawing, interchange approval or batch inspection certificate. Final supply is governed by the confirmed quotation and controlled drawing.