


4.460 Combined Bearing

Family: Eccentric adjustable

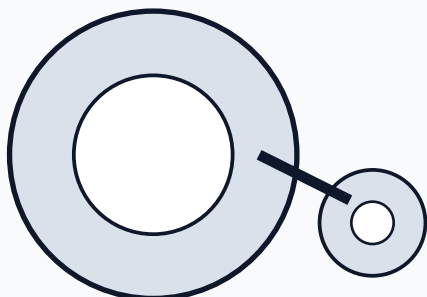

4.460

Combined roller bearing

Configuration illustration - not to scale

Adjustable heavy guide bearing in the 107.7 mm outside-diameter class.

Typical application: Industrial masts, lifting systems and warehouse equipment requiring axial adjustment.

Common references: KB4.060 / 400-0460

Catalog dimensions and ratings

Parameter	Catalog value	Parameter	Catalog value
d	60 mm	D	107.7 mm
H	53 mm	FixedCounterpart	4.060
Adjustment	Eccentric axial roller	Material	20CrMnTi

Quotation verification

- Confirm the complete designation, suffix and marking photographs.
- Verify d, D, H, h, B, S, T and every mounting interface on the controlled drawing.
- Check radial and axial load, speed, shock, duty cycle, profile and lubrication.
- Agree inspection records, marking and packing scope before order.

Identification reference only. This sheet is not a controlled manufacturing drawing, interchange approval or batch inspection certificate. Final supply is governed by the confirmed quotation and controlled drawing.