


4.461 Combined Bearing

Family: Eccentric adjustable

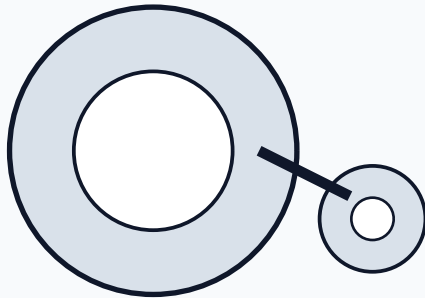

4.461

Combined roller bearing

Configuration illustration - not to scale

High-load eccentric-adjustable bearing for industrial lifting guides in the 4.061 size class.

Typical application: Heavy mast channels, lifting systems and industrial guide profiles.

Common references: KB4.061 / 400-0461

Catalog dimensions and ratings

Parameter	Catalog value	Parameter	Catalog value
d	60 mm	D	107.7 mm
H	69 mm	h	55 mm
B	31 mm	S	34 mm
T	71 mm	FixedCounterpart	4.061
Adjustment	Eccentric axial roller	Material	20CrMnTi

Quotation verification

- Confirm the complete designation, suffix and marking photographs.
- Verify d, D, H, h, B, S, T and every mounting interface on the controlled drawing.
- Check radial and axial load, speed, shock, duty cycle, profile and lubrication.
- Agree inspection records, marking and packing scope before order.

Identification reference only. This sheet is not a controlled manufacturing drawing, interchange approval or batch inspection certificate. Final supply is governed by the confirmed quotation and controlled drawing.