


4.462 Combined Bearing

Family: Eccentric adjustable

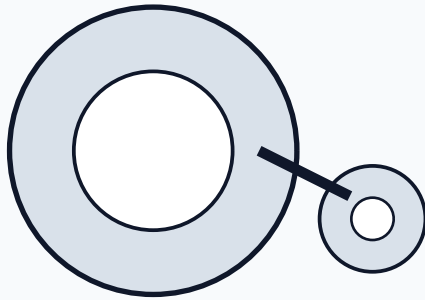

4.462

Combined roller bearing

Configuration illustration - not to scale

Large adjustable combined bearing for logistics and steel equipment in the 4.062 size class.

Typical application: Logistics systems, lifting units and heavy steel-section guides.

Common references: KB4.062 / 400-0462

Catalog dimensions and ratings

Parameter	Catalog value	Parameter	Catalog value
d	60 mm	D	123 mm
H	72.3 mm	h	56 mm
B	37 mm	S	40 mm
T	80 mm	FixedCounterpart	4.062
Adjustment	Eccentric axial roller	Material	20CrMnTi

Quotation verification

- Confirm the complete designation, suffix and marking photographs.
- Verify d, D, H, h, B, S, T and every mounting interface on the controlled drawing.
- Check radial and axial load, speed, shock, duty cycle, profile and lubrication.
- Agree inspection records, marking and packing scope before order.

Identification reference only. This sheet is not a controlled manufacturing drawing, interchange approval or batch inspection certificate. Final supply is governed by the confirmed quotation and controlled drawing.