


4.463 Combined Bearing

Family: Eccentric adjustable

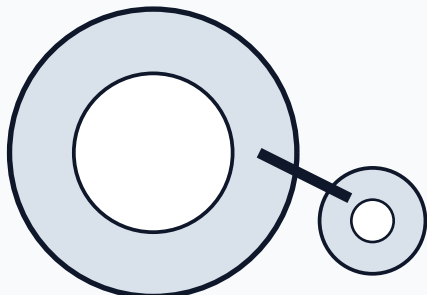

4.463

Combined roller bearing

Configuration illustration - not to scale

Severe-duty adjustable combined bearing for large steel-section systems in the 4.063 size class.

Typical application: Heavy forklift trucks, cranes, palletizers, AS/RS systems and vertical lift units.

Common references: KB4.063 / 400-0463

Catalog dimensions and ratings

Parameter	Catalog value	Parameter	Catalog value
d	60 mm	D	149 mm
H	78.5 mm	h	58.5 mm
B	45 mm	S	50 mm
FixedCounterpart	4.063	Adjustment	Eccentric axial roller
Material	20CrMnTi		

Quotation verification

- Confirm the complete designation, suffix and marking photographs.
- Verify d, D, H, h, B, S, T and every mounting interface on the controlled drawing.
- Check radial and axial load, speed, shock, duty cycle, profile and lubrication.
- Agree inspection records, marking and packing scope before order.

Identification reference only. This sheet is not a controlled manufacturing drawing, interchange approval or batch inspection certificate. Final supply is governed by the confirmed quotation and controlled drawing.