


PR4.055 Combined Bearing

Family: Precision

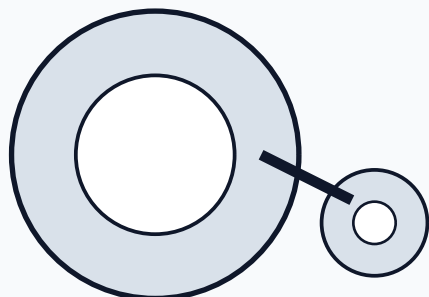

PR4.055

Combined roller bearing

Configuration illustration - not to scale

Precision fixed-axial combined bearing commonly supplied alone or welded to an application-specific plate.

Typical application: Precision lift guides, mast channels and AP-series plate-mounted bearing assemblies.

Common references: MR002M / TR002M / DR400-0055 / JD73.8-44

Catalog dimensions and ratings

Parameter	Catalog value	Parameter	Catalog value
d	35 mm	D	73.8 mm
H	44 mm	h	36 mm
B	23 mm	S	22 mm
A	2.5 mm	r	4 mm
T	48 mm	Material	20CrMnTi

Quotation verification

- Confirm the complete designation, suffix and marking photographs.
- Verify d, D, H, h, B, S, T and every mounting interface on the controlled drawing.
- Check radial and axial load, speed, shock, duty cycle, profile and lubrication.
- Agree inspection records, marking and packing scope before order.

Identification reference only. This sheet is not a controlled manufacturing drawing, interchange approval or batch inspection certificate. Final supply is governed by the confirmed quotation and controlled drawing.