


VELRIX

USER MANUAL

AMP & IR Pedal

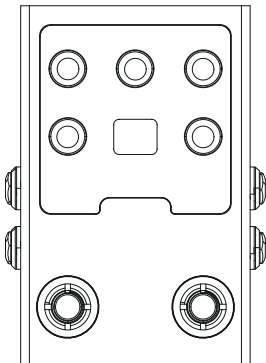

EN

※The Company reserves the right to continuously upgrade and optimize its products and may adjust product appearance, specifications, packaging design, accessories, and related details at any time without prior notice. Product images are for reference only; slight color variations may occur due to lighting conditions during photography or differences in display screens. To ensure the product meets your requirements, please confirm the actual functions and specifications with your local dealer before purchasing.

Product Overview

- **Product Positioning:** A professional-grade dual-module amp/cabinet modeler for guitar and bass, designed for professional musicians and recording engineers. Suitable for live performances, studio recording, and home practice.
- **Dual Core Modules:** Integrates a pre-amplifier (Amp) and a cabinet simulator (Cab) as two independent modules, allowing flexible and independent tone control.
- **I/O & Effect Loop:** Equipped with dual mono-chain interfaces and supports customizable effect loops. External time-based and modulation effects (e.g., delay, reverb) can be inserted while preserving the core amp/cab tone.
- **Custom Tone:** Utilizes neural amp modeling technology. Supports importing NAM and IR files via dedicated editor software to create personalized tones and accurately reproduce acoustic characteristics.
- **Preset Storage & Switching:** Each module (Amp and Cab) provides 9 independent preset slots, enabling unlimited tone expansion and flexible recall.

Important Precautions

- **Power Supply:** Use only a dedicated 9V DC (center-negative) power supply rated $\geq 300\text{mA}$, or a USB-C 5V supply rated $\geq 300\text{mA}$. Do not use other specifications, as this may damage the unit. Unplug the power when not in use or during thunderstorms.
- **Connections:** Always turn off the power before connecting or disconnecting cables. Disconnect all cables before moving the unit.
- **Placement:** Avoid direct sunlight, high temperature, humidity, dust, magnetic fields, and strong vibration.
- **Interference:** Keep away from radios, televisions, and other devices that may cause signal interference.

- **Cleaning:** Wipe with a dry, soft cloth. Do not use alcohol, solvents, or other chemical cleaners.
- **Operation:** Handle all controls gently. Avoid dropping the unit, applying heavy pressure, or allowing foreign objects to enter the enclosure.


Front Panel and Interface Descriptions

- 1.BASS Knob:** Adjusts the low-frequency response of the Amp module.
- 2.MIDDLE Knob:** Adjusts the mid-frequency response of the Amp module.
- 3.TREBLE Knob:** Adjusts the high-frequency response of the Amp module.
- 4.GAIN Knob:** Adjusts the gain level of the Amp module.
- 5.MASTER Knob:** Controls the overall output volume of the unit.
- 6.Digital Tube Display:** Shows the CAB preset number on the left and the AMP preset number on the right. When a module is enabled, the lower-right dot of the corresponding number lights up.
- 7.OUT1/SEND:** Output/Effect Loop Send. Can output the processed core tone or send the preamp signal to external effects. In Amp/Cab Split mode, outputs the signal processed by the Amp module.
- 8.OUT2:** Output. Can output the same signal as OUT1, or work with OUT1 for dual-mono output. In Amp/Cab Split mode, outputs the signal processed by the Cab module.
- 9.IN1:** Input. The starting point of the signal chain; use for mono input. In Amp/Cab Split mode, signal is processed by the Amp module.
- 10.IN2/RETURN:** Input/Effect Loop Return. Can be used for mono input. In Amp/Cab Split mode, signal is processed by the Cab module. In Effect Loop mode, receives processed signal from external effects and returns it to the unit.
- 11.FS-L Footswitch:** Short press: Toggles the Cab module on/off. Long press: Cycles through 9 cabinet IR files. RGB LED: Lit = enabled, off = disabled.

12.FS-R Footswitch: Short press: Toggles the Amp module on/off. Long press: Cycles through 9 amplifier NAM files. RGB LED: Lit = enabled, off = disabled.

13.DC 9V Jack: Power input. Requires 9V DC (center-negative) regulated power supply rated $\geq 300\text{mA}$.

14.USB-C Port: Used for computer connection, preset import, firmware updates, and audio recording/transmission. Supports $5\text{V} \geq 300\text{mA}$ power supply. When used for audio transmission, the wet signal level is automatically reduced to prevent overload damage to connected devices.

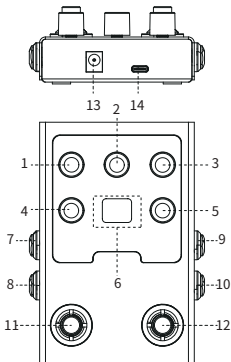


Bypass Mode Description

When both the Amp module and the Cab module are turned off, the device automatically enters Analog Bypass mode (Soft Bypass). The input signal bypasses the effect processing of both the Amp and Cab modules and is routed directly to the output ports. In this mode, the input signal is passed through completely, ensuring minimal loss and coloration for connection to downstream devices (e.g., stereo effects units, mixing consoles, etc.).


Connection Methods

• Mono Output


1. Effect Series

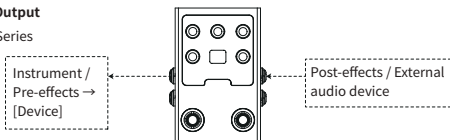

2. Effect Loop

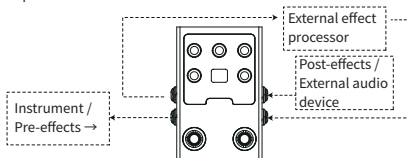


• Dual-Mono Output (OUT1 and OUT2 output the same content)

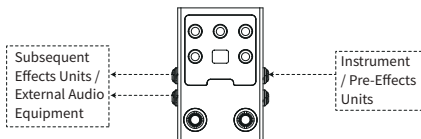

- **AMP/CAB Split Stereo Output**

(IN1 → Amp module → OUT1, IN2 → Cab module → OUT2)

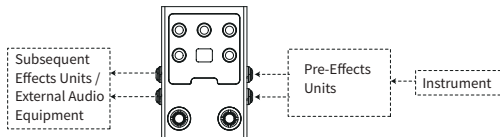

Effect Descriptions

AMP	Based on
1	Fender Tweed Deluxe
2	Roland JC-120 Jazz Chorus
3	Vox AC30
4	Marshall JCM800 2203
5	Orange OR120
6	Hiwatt DR103
7	Soldano SLO-100
8	Peavey 6505
9	ENGL Fireball 100

CAB	Based on
1	Fender Bassman 212
2	Roland JC-120 212
3	Vox AC30 212
4	Marshall 1960A 412
5	Orange PPC412
6	Hiwatt SE412
7	Soldano 212
8	Peavey 6505 412
9	ENGL E412V 412

Disclaimer:

The manufacturer and product names mentioned in this list are used solely for the objective description of the relevant products' tone characteristics and functional features. They do not constitute endorsement, recommendation, or warranty of any manufacturer or product, nor imply any form of quality assurance or usage advice.

All trademark names are the legal property of their respective companies, and the associated trademark rights are duly owned by those companies. The references to these trademarks herein are for illustrative purposes only, to assist in describing product information, and do not infringe upon their exclusive trademark rights.


Technical Specifications

AMP Preset Slots	9 slots (NAM files)
CAB Preset Slots	9 slots (1024/2048 sample points, mono WAV files)
Input	2 × 1/4" mono audio jacks, input impedance 1 MΩ
Output	2 × 1/4" mono audio jacks, output impedance 100 Ω
Operating Voltage	9V DC (center-negative) / USB 5V
Operating Current	300 mA
Weight	Approx. 362 g
Dimensions	132.5 mm (L) × 98.5 mm (W) × 43.5 mm (H)
Accessories	USB-C data cable, User Manual

VELRIX

使用说明

AMP & IR 单块效果器

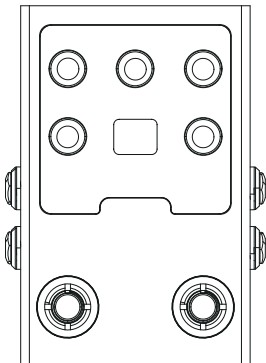

CN

※本公司有权对产品进行持续升级与优化，可随时调整产品的外观、规格参数、包装设计、配套配件及相关细节，前述调整恕不另行通知。产品图片因拍摄光线、设备屏幕显示差异等因素，可能与实物存在轻微色差，仅供参考。为确保您选购到符合需求的产品，请在购买前向当地经销商确认产品实际功能及规格。

产品概述

- **产品定位：**专业级吉他 / 贝斯双模块箱模效果器，面向专业乐手、录音师，覆盖现场演出、棚内录音、居家练琴全场景。
- **核心双模块：**集成前级放大（Amp）+ 箱体模拟（Cab）双核心，支持独立运行，音色调控自由度高。
- **接口与回路：**配备双单声道链路接口，支持自定义效果回路，可外接延迟、混响等周边效果，保留核心箱模音色。
- **自定义音色：**神经音箱建模技术，经专属上位机导入 NAM、IR 文件，定制个性音色，精准还原声学特性。
- **存储切换：**Amp、Cab 模块各设 9 个独立存储槽，支持音色无限拓展。

注意事项

- **电源：**请使用9V DC 内负外正 $\geq 300\text{mA}$ / USB-C 5V $\geq 300\text{mA}$ 专用电源，禁止混用其他规格，否则易损坏设备；不使用或雷雨天请拔掉电源。
- **连接：**连接 / 拔线前请先关闭电源，移动前请断开所有线材。
- **放置：**避免阳光直射、高温、潮湿、多尘、磁场及剧烈震动环境。
- **干扰：**使用时远离收音机、电视机等设备，避免信号干扰。
- **清洁：**用干燥软布擦拭，勿使用酒精、稀释剂等化学溶剂。
- **操作：**请勿暴力操作控件，防止异物掉入机内，避免摔落与重压。

面板与接口说明

- 1.BASS旋钮：**调节AMP模块的低频响应。
- 2.MIDDLE旋钮：**调节AMP模块的中频响应。
- 3.TREBLE旋钮：**调节AMP模块的高频响应。
- 4.GAIN旋钮：**调节AMP模块的增益度。
- 5.MASTER旋钮：**控制机器的整体输出音量。
- 6.数码管显示屏：**数码管左侧显示 CAB 序号，右侧显示 AMP 序号；模块开启后，对应序号右下角点亮。
- 7.OUT1/SEND：**输出兼效果回路发送接口，可输出核心音色信号，或向外部效果器发送前级信号。AMP/CAB 分离模式下，输出经 AMP 模块处理后的信号。
- 8.OUT2：**输出接口，可输出与 OUT1 一致的信号，或与 OUT1 配合实现双单声道输出。AMP/CAB 分离模式下，输出经 CAB 模块处理后的信号。
- 9.IN1：**输入接口，为设备信号链的起始端，单声道输入时可接入此接口。AMP/CAB 分离模式下，信号输入 AMP 模块处理。


10.IN2/RETURN：输入兼效果回路返回接口，单声道输入时可接入此接口。AMP/CAB 分离模式下，信号输入 CAB 模块处理。效果回路模式下，接收外接效果器处理后的信号并回传至设备。

11.FS-L踩钉：短按为切换箱体模拟（CAB）模块的开启 / 关闭状态。长按为循环切换 9 组箱体 IR 文件。RGB灯常亮 = 开启，熄灭 = 关闭

12.FS-R踩钉：短按为切换前级放大（AMP）模块的开启 / 关闭状态。长按为循环切换 9 组放大器 NAM 文件。RGB灯常亮 = 开启，熄灭 = 关闭

13.DC 9V接口：供电接口，需接入 9V DC 内负外正，300mA 以上稳压电源驱动设备。

14.USB-C 接口：用于电脑连接，可实现预设导入、固件升级与音频录制传输，支持 5V $\geq$ 300mA 供电；当用于音频传输时，效果湿声将自动降低音量，避免外接设备因输入过载损坏。

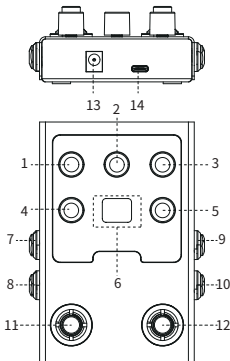


旁通模式说明

当 AMP 模块与 CAB 模块均处于关闭状态时，设备将自动进入模拟旁通模式（Soft Bypass），输入信号不经过 AMP 与 CAB 模块的效果处理，直接直通至输出接口。该模式生效时，输入信号会完整传递至对应的输出接口，确保信号低损耗、低染色地直通至后续设备（如立体声效果器、调音台等）。


连接方式

• 单声道输出


1. 效果串联

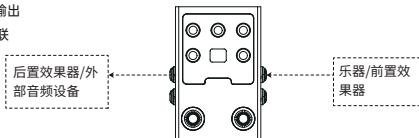

2. 效果回路

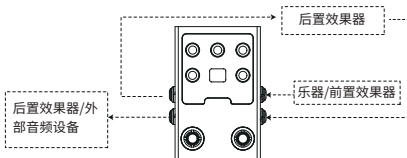


●双单声道输出 (OUT1和OUT2输出内容一样)

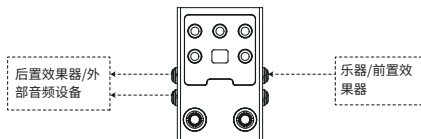

●AMP/CAB 分离式双声道输出

(IN1 → AMP 模块 → OUT1, IN2 → CAB 模块 → OUT2)

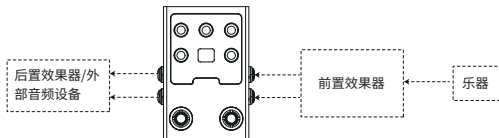

效果描述

AMP	基于
1	Fender Tweed Deluxe
2	Roland JC-120 Jazz Chorus
3	Vox AC30
4	Marshall JCM800 2203
5	Orange OR120
6	Hiwatt DR103
7	Soldano SLO-100
8	Peavey 6505
9	ENGL Fireball 100

CAB	基于
1	Fender Bassman 212
2	Roland JC-120 212
3	Vox AC30 212
4	Marshall 1960A 412
5	Orange PPC412
6	Hiwatt SE412
7	Soldano 212
8	Peavey 6505 412
9	ENGL E412V 412

声明:

本列表中提及的厂商及产品名称,仅用于客观描述相关产品的音色表现与功能特性,不构成对任何厂商或产品的推荐、认可或背书,亦不涉及任何形式的质量保证或使用建议。所有商标名称均为其所属公司的合法财产,相关商标权依法归对应公司所有。本列表对上述商标的引用,仅为辅助说明产品信息之用,不构成对其商标专用权的侵犯。

效果技术参数

AMP储存位	9个 (NAM文件)
CAB储存位	9个 (1024/2048采样点, 单声道WAV文件)
输入	2 个 1/4" 单声道音频接口, 输入阻抗 (阻抗1Mohm)
输出	2 个 1/4" 单声道音频接口, 输出阻抗 (阻抗100ohm)
工作电压	9V DC 内负外正 / USB 5V
工作电流	300mA
重量	约362克
尺寸	132.5毫米 (长) * 98.5毫米 (宽) * 43.5毫米 (高)
附件	USB-C 数据线、说明书