

NOTE: This is a “Work In Progress”; implement at your own risk.

Sheet: OSv4\_logic

Logic

File: OSv4\_logic.sch







Sheet: OSv4\_H-bridge

H-bridge

File: OSv4\_H-bridge.sch

File: OSv4.sch		
Sheet: /		
Title: OpenServo v4 preliminary work-up, © OpenServo project 2010		
Size: A4	Date: 13 apr 2010	Rev:
KiCad E.D.A.	eeschema (20100406 SVN-R2508)-final	Id: 1/3

**NOTE: This is a "Work In Progress"; implement at your own risk.**

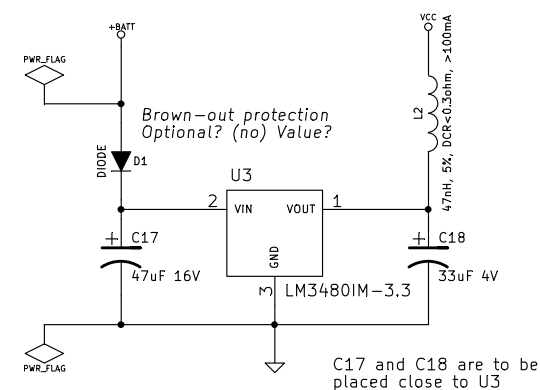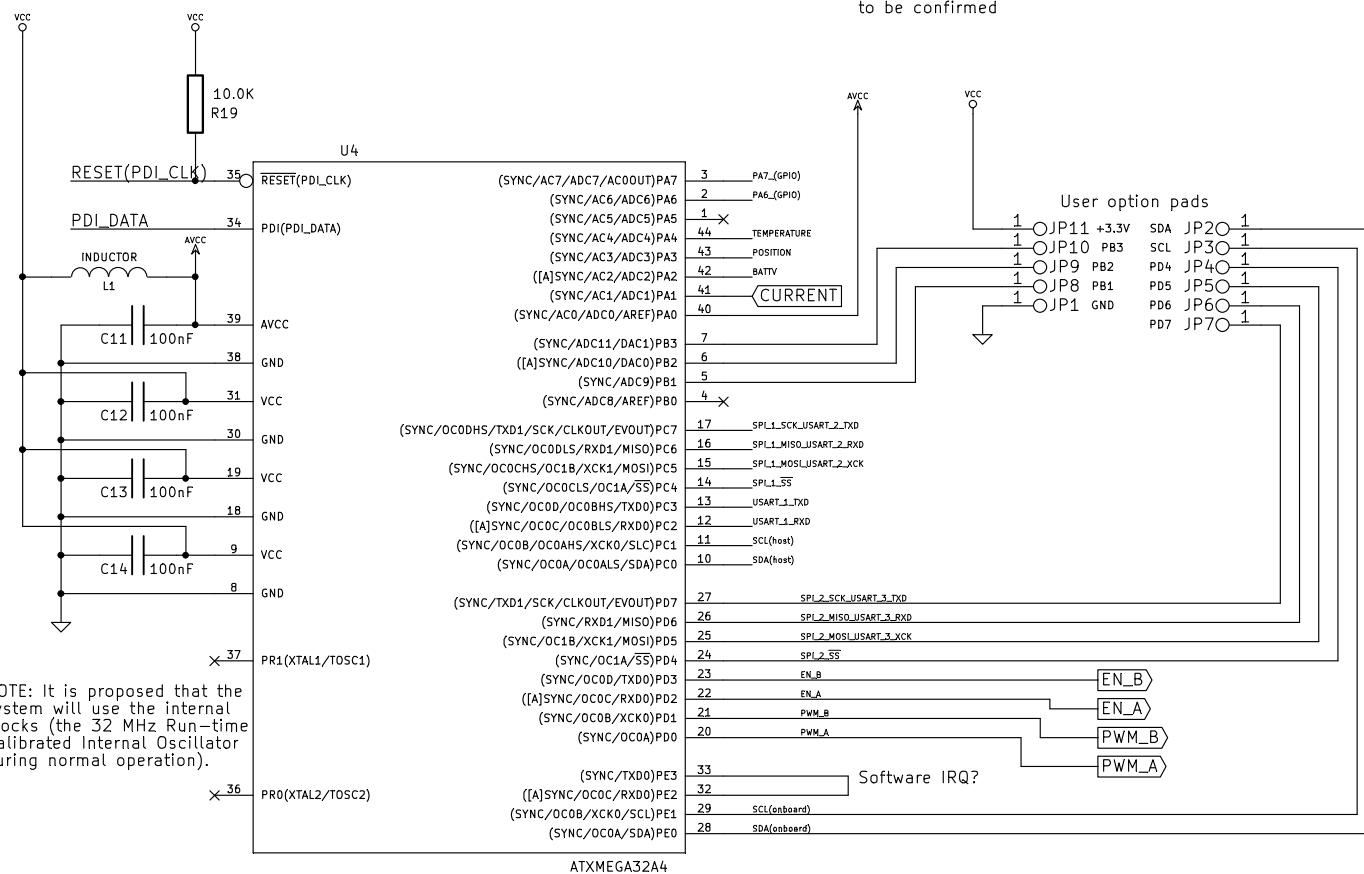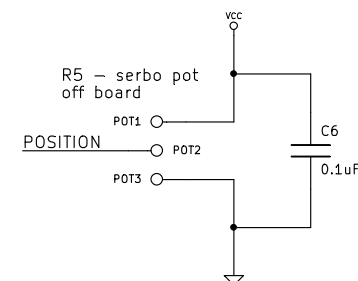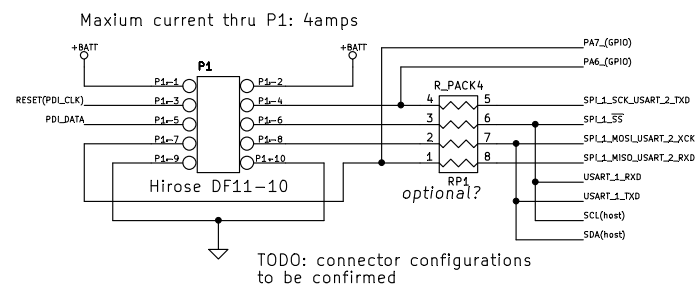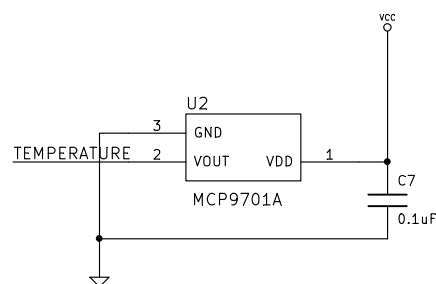

NOTE: Decoupling capacitors to be placed close to the device for each supply pin pair in a signal group.

**NOTE: This is a "Work In Progress"; implement at your own risk.**

TODO: Do we need to Reinststate R9, R10, R13 and R14? If yes, then they should be an RPACK to save PCB space.

TODO: What value is needed for the protection diode D2?

TODO: R1 and R3 need adjustment for V4.

File: OSv4\_H-bridge.sch  
Sheet: /OSv4\_H-bridge/  
**Title: OpenServo v4 preliminary work-up. © OpenServo project 2010**  
Size: A4 Date: 13 apr 2010 Rev: 0.0  
KiCad E.D.A. eeschema (20100406 SVN-R2508)-final Id: 3/3

TODO: What value is needed for the protection diode D2?

TODO: R1 and R3 n  
adjustment for V4.

U1

lout

T1009

Potential MOSFETs for Q1/Q4:  
SP8M4  
FDS8858CZ  
FDS9934C??

File: OSv4_H-bridge.sch		
Sheet: /OSv4_H-bridge/		
<b>Title: OpenServo v4 preliminary work-up, © OpenServo project 2010</b>		
Size: A4	Date: 13 apr 2010	Rev: 0.0
KiCad E.D.A. eeschema (20100406 SVN-R2508)-final		Id: 3/3