

S32K1 Arm® Cortex®-based MCUs for Automotive and Industrial Applications

The S32K1 family of 32-bit AEC-Q100 qualified MCUs combines a breakthrough suite of production-grade tools and software with a scalable family of Arm Cortex-M based MCUs built on future-proof features. S32K1 MCUs are included in NXP's Product Longevity Program which guarantees a minimum of 15 years assured supply.

Value Proposition

Scalable Single Platform

- ▶ Hardware and software compatible families
- ▶ 48 MHz Arm Cortex M0+ core; or up to 112 MHz Arm Cortex M4F core
- ▶ Memory range from 128 KB to 2 MB
- ▶ Pin count from 32 to 176 pins
- ▶ QFN, LQFP, MAPBGA packages

Superior Features and Performance

- ▶ ISO CAN FD
- ▶ CSEc hardware security
- ▶ Ultra-low power performance
- ▶ ASIL B ISO26262 functional safety

Complete Software Solution





- ▶ Production-grade Software Development Kit (SDK)
- ▶ S32 Design Studio IDE
- ▶ Third-party ecosystem support to reduce time-to-market

S32K1 Family Overview


S32K116		S32K118		Common Features				S32K142		S32K144		S32K146		S32K148	
Cortex-M0+ @ 48MHz				AEC-Q100				Cortex-M4F @ up to 112MHz							
up to 43 I/Os		up to 58 I/Os		Security Module (CSEc)				up to 89 I/Os		up to 128 I/Os		up to 156 I/Os			
4 channel eDMA				ASIL-B compliant				16 channel eDMA							
1x FlexCAN with 1x FD				Low Power				2x FlexCAN with 1x FD		3x FlexCAN with 1x FD		3x FlexCAN with 2x FD		3x FlexCAN with 3x FD	
1x 13-ch 12-bit ADC		1x 16-ch 12-bit ADC		FlexIO				2x 16-ch 12-bit ADC		2x 24-ch 12-bit ADC		2x 32-ch 12-bit ADC			
				MPU											
				FlexTimer											

Key Features

The S32K1 MCU family provides a scalable platform with next generation safety, security, connectivity and low-power features.

 <h3>Scalability</h3> <ul style="list-style-type: none"> • Memory range from 128 KB to 2 MB • Pin count from 32 to 176 pins • QFN, LQFP, MAPBGA packages • IP compatability across family 	 <h3>Security</h3> <ul style="list-style-type: none"> • Cryptographic Services Engine (CSEc) Module • SHE Compliant • AES128 Encryption and Decryption • Up to 20 Key Firmware • Unique ID • Secure Boot • Flash content protection in normal test mode
 <h3>Safety</h3> <ul style="list-style-type: none"> • ISO26262 ASIL-B • ECC on falsh and SRAM MPU; CRC Watchdog • Core Self Test Library • FMEDA • Safety Manual • Technical Support 	 <h3>Connectivity</h3> <p>FlexCAN</p> <ul style="list-style-type: none"> • Support CAN-FD and standard CAN • 64 byte CAN-FD at 8 Mbps <p>FlexIO</p> <ul style="list-style-type: none"> • Emulation of UART, SPI, I²C, I²S, LCD RGB, PWM, LIN, etc. <p>QUADSPI</p> <ul style="list-style-type: none"> • Interface to external flash device • Support SDR and HyperRAM modes <p>Ethernet & Audio Interface</p> <ul style="list-style-type: none"> • 10/100 Mbps MAC • IEEE802.3-2002 • AVB • IEEE-1588 timestamping

S32K1 Memory & Package Scalability

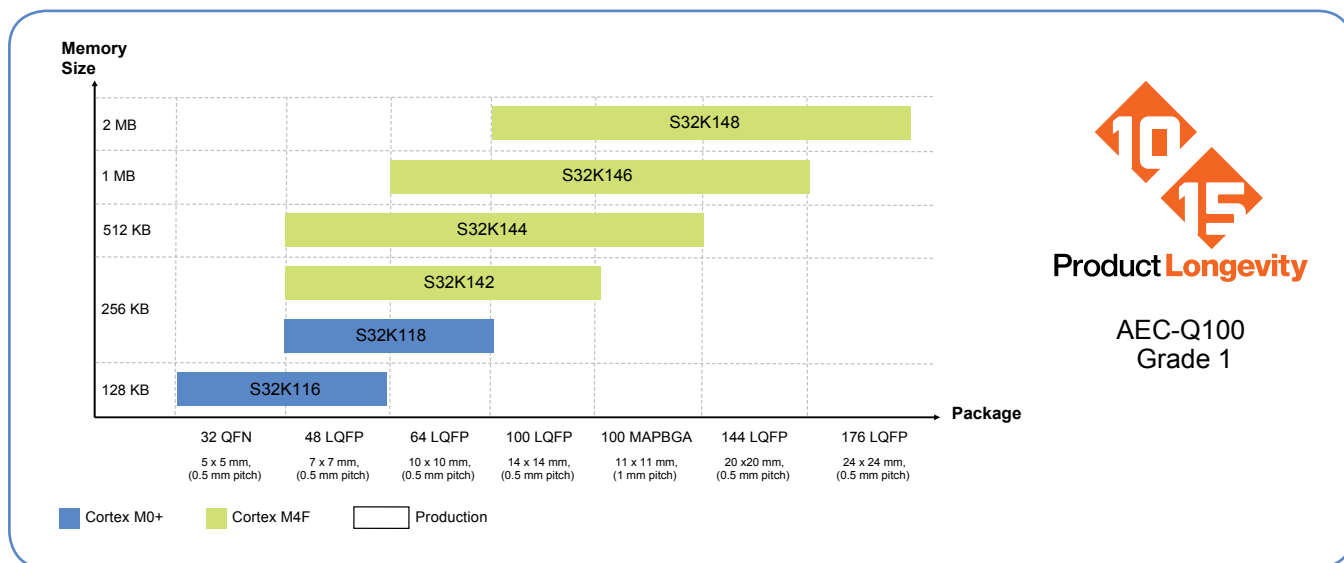

Ultra-Low Power

Typical consumption values across S32K1xx power modes


VLPS	40 µA	at 5V with LPTMR enabled
VLPR	1.07 mA	at 5V @ 8 MHz
STOP1	6.3 mA	at 5V @ 48 MHz
STOP2	7.2 mA	at 5V @ 48 MHz
RUN	20.3 mA	at 5V @ 48 MHz
HRUN	52.2 mA	at 5V @ 112 MHz

S32K1 MCUs combine multiple low power operating modes with autonomous, low power peripherals providing complete control over the dynamic and static power profiles.

- ▶ Seven active and standby modes (RUN/WAIT/STOP) with all memory & register contents and IO pin states maintained in all modes
- ▶ All I/O pins and several peripherals function as fast wake-up sources
- ▶ Analog, communication and timing peripherals operate autonomously via DMA with no CPU intervention
- ▶ Extensive clock gating for core & peripherals

Enablement

The S32K1 MCUs are supported by a complete ecosystem to minimize development effort and reduce time-to-market.

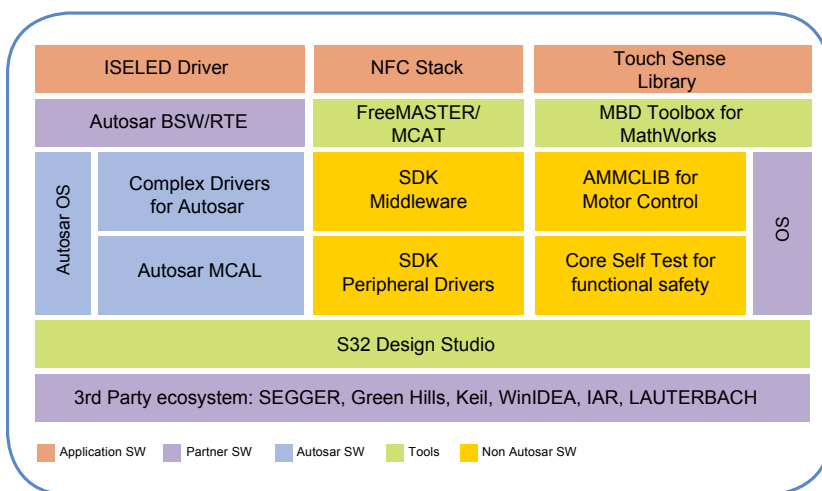

- ▶ S32 Design Studio IDE
 - Free of charge, zero code limit, Eclipse based, supports GCC and third-party compilers
 - Compatible with NXP's Advanced Math and Motor Control Library (AMMCLIB)
- ▶ Software Development Kit (SDK)
 - Free of charge, production-grade
 - MISRA and SPICE Level 3 compliant low-level drivers for all MCU peripherals
 - Free RTOS operating system
- ▶ AUTOSAR MCAL and Core Self-Test Library

S32K1 Evaluation Boards

Ardunio™ UNO compliant, touch sense pads, OpenSDA serial and debug adaptor, microUSB or 12 V supply




S32K116EVB-Q048	
UJA1169 CAN/LIN PHY SBC	\$49 SRP
S32K118EVB-Q064	
UJA1169 CAN/LIN PHY SBC	\$49 SRP
S32K142EVB-Q100	
UJA1169 CAN/LIN PHY SBC	\$65 SRP
S32K144EVB-Q100	
UJA1169 CAN/LIN PHY SBC	\$65 SRP
S32K146EVB-Q144	
UJA1169 CAN/LIN PHY SBC	\$149 SRP
S32K148EVB-Q176	
UJA1132 CAN/LIN PHY SBC	\$149 SRP
ADTJA1101-RMII Ethernet daughter card	\$75 SRP

MTRDEVKSBNK144 / MTRDEVKSPNK144 \$299 SRP
3-phase BLDC/PMSM Development Kit with S32K144 MCU



DEVKIT-MOTORGD \$299 SRP
Low-Cost Motor Control Solution for DEVKIT Platform

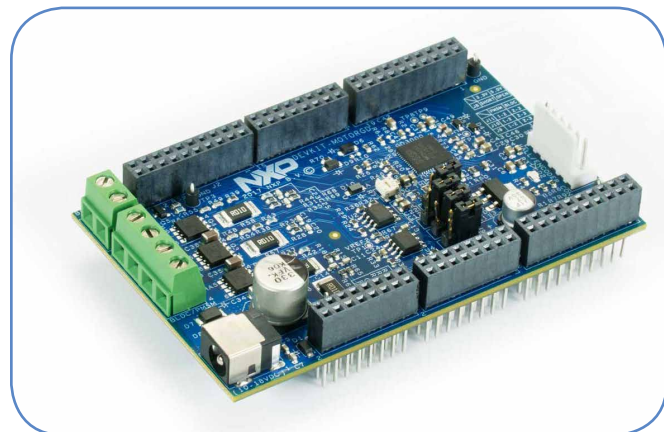

Partners

- ▶ Arm
- ▶ AUTOSAR
- ▶ Keil®
- ▶ Cosmic Software
- ▶ IAR Systems
- ▶ Vector
- ▶ Green Hills®
- ▶ Elektrobit
- ▶ Wind River
- ▶ MathWorks®
- ▶ ARCCORE
- ▶ FreeRTOS

Target Applications

- | | |
|---------------------|----------------------|
| Automotive | Industrial |
| ▶ Seat Control | ▶ Factory Automation |
| ▶ Window | ▶ Inverters |
| ▶ Interior Lighting | ▶ Home Audio |
| ▶ Door | ▶ Sensing |
| ▶ Sunroof | ▶ Avionics |
| ▶ Pump & Fans, HVAC | ▶ Medical |

S32K1 Ordering Information

Part numbers below are available for sampling on www.nxp.com/S32K. For a full list of all orderable part numbers see the attachment included with S32K1xx MCU Family data sheet.

Part Number	Flash Size/ RAM	Features	Cores	Package	Ambient Temperature
FS32K116LAT0MFMFT	128 KB/17 KB	CAN FD; FlexIO; Crypto Security Engine; eDMA (4 ch)	Cortex M0+ core; 48 MHz	32 QFN	-40 to 125C
FS32K116LAT0MLFT				48 LQFP	
FS32K118LAT0MLFT	256 KB/25 KB			48 LQFP	
FS32K118LAT0MLHT				64 LQFP	
FS32K142HAT0MLFT	256 KB/32 KB	CAN FD; FlexIO; Crypto Security Engine; eDMA (16 ch)	Cortex M4F core; 80 MHz	48 LQFP	
FS32K142HAT0MLHT				64 LQFP	
FS32K142HAT0MLLT				100 LQFP	
FS32K144HAT0MLFT	512 KB/64 KB			48 LQFP	
FS32K144HAT0MLHT				64 LQFP	
FS32K144HAT0MLLT				100 LQFP	
FS32K144HAT0MMHT				100 MAPBGA	
FS32K146HAT0MLHT	1 MB/128 KB			64 LQFP	
FS32K146HAT0MLLT				100 LQFP	
FS32K146HAT0MLQT				144 LQFP	
FS32K146HAT0MMHT				100 MAPBGA	
FS32K148UJT0VLLT	2 MB/256 KB		CAN FD; FlexIO; Crypto Security Engine; eDMA (16 ch); Ethernet; Serial Audio Interface; QSPI	Cortex M4F core; 112 MHz	100 LQFP*
FS32K148UJT0VLQT		144 LQFP			
FS32K148UJT0VLUT		176 LQFP			
FS32K148UJT0VMHT		100 MAPBGA			

*QSPI not supported by S32K148-100 LQFP derivatives

S32K1 Resources

For more information visit:

S32K1 Product Information

nxp.com/S32K

S32K community

nxp.com/S32K1Community

SafeAssure community

nxp.com/SafeAssureCommunity

Product Longevity Information

nxp.com/ProductLongevity

nxp.com/S32K

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners.
© 2019 NXP B.V.

Date of release: August 2019
Document Number: S32K1AUTOMCUBRA4 REV 4

