

Variable-Order Fractional Operators from Fixed-Pole Banks: Definition by Structure, Error Guarantees, and Order Tracking

First Author and Second Author

Abstract—Variable-order (VO) fractional operators have several inequivalent definitions that differ in how past orders enter the memory, and it is unclear which definition a finite-dimensional realization implements when it switches coefficients as the order varies. We show that an exact switching state map exists only between similar realizations, so realizations whose poles move with the order cannot implement the A- or B-type Grünwald–Letnikov (GL) definitions under switching. A Beta-integral representation instead realizes the GL weights with order-independent poles. With the order in the output weights the bank is the A-type, with it in the input weights the B-type, for every order sequence; inverting it gives the recursive D- and E-types with exact duality, all at $O(K)$ cost. In the ℓ^1 and ℓ^∞ norms the relative operator error of the forward types never exceeds the relative weight error. The construction extends to every kernel family that is completely monotone in the lag, with $K = O(\ln(1/\varepsilon) \ln(R/\varepsilon))$ common poles for tolerance ε and memory R . A fit-free design rule met all 400 specifications of a sealed holdout. For tracking a time-varying order, the A-type bank makes an exact grid filter affordable, and a B-type extended Kalman filter on the bank comes within 6% of the causal Bayesian Cramér–Rao bound. On measured lithium-ion drive cycles, running a fitted VO model with the other definition increased its held-out error in 51 of 56 cases, while the bank matched the literal GL sum to 3×10^{-6} at a fixed cost.

Index Terms—Variable-order fractional calculus, Grünwald–Letnikov, fixed-pole approximation, completely monotone kernels, order tracking, posterior Cramér–Rao bound, lithium-ion battery.

I. INTRODUCTION

FRACTIONAL-ORDER operators describe systems whose memory decays as a power law. When the exponent itself changes in time, the natural model is a variable-order (VO) operator with order $\alpha(t)$ [1]–[4]. Unlike the constant-order case, the generalization is not unique: different ways of letting the order enter the memory give operators that coincide for constant order but differ as soon as the order changes [2], [5], [6]. For Grünwald–Letnikov (GL) operators, Sierociuk et al. use four types [7]–[10]. The A-type weights the whole history with the current order; the B-type weights each past sample with the order that was active when the sample entered; the recursive D- and E-types are the inverses of the A- and B-types of opposite order. After a single switch these definitions differ by as much as the output itself, so the definition is part of the model.

Practical realizations are finite-dimensional. Constant-order operators are approximated by rational transfer functions,

most often by Oustaloup’s recursive distribution of poles and zeros [11] and related schemes [12], [13], whose poles move with the order. Fixed-pole approximations exist for constant orders [14]–[16], and diffusive and sum-of-exponentials representations lead to fixed nodes [17]–[21]. When the order varies, a constant-order realization is switched between orders, by switching circuits [7], [22], [23] or by changing coefficients while keeping the state (a “hot swap”). Direct GL convolutions with current-order weights [24], [25] are A-type operators whose cost grows with the memory. Order-independent exponents have been used for the A-type VO Caputo derivative in fast solvers [26]–[28], without the B-, D- or E-types, a design rule over the order range, or hardware. Transients after coefficient changes in recursive filters are a classical topic [29], [30], but none of these lines asks which VO definition a switched realization implements.

Table I summarizes how existing realizations treat a varying order. This paper answers two questions for GL operators of order $-1 < \alpha < 1$ and, more generally, for kernel families that are completely monotone in the lag: which VO definition does a finite-dimensional realization implement for an arbitrary order sequence, and can its structure select the definition at no extra cost? The contributions are:

- 1) *Necessity*: an exact switching state map exists only between similar realizations (Theorem 2); moving-pole realizations cannot implement the A- or B-type at a switch.
- 2) *Definition by structure*: a Beta-integral representation gives a discrete bank with order-independent poles that realizes the A-type with the order in the output weights and the B-type with it in the input weights, for every order sequence (Proposition 1); inverting it gives the D- and E-types with exact duality (Proposition 2).
- 3) *Guarantees*: the relative operator error of the forward types never exceeds the relative weight error in ℓ^1 and ℓ^∞ (Theorem 1); the results hold for every completely monotone kernel family, with explicit constants for GL (Theorem 3); a fit-free rule sizes the bank, and the inverse is stable if and only if a realized DC gain is positive (Proposition 3).
- 4) *Order tracking*: the A-type bank has order-independent regressors, which makes an exact grid filter affordable; we derive the posterior Cramér–Rao bound and compare the estimators with it (Sect. VIII).
- 5) *Measured data*: on lithium-ion drive cycles, the defini-

TABLE I
HOW EXISTING REALIZATIONS TREAT A VARYING ORDER. “INFERRED” MARKS ENTRIES OBTAINED BY APPLYING PROPOSITION 1 OR THEOREM 2 TO THE STRUCTURE DESCRIBED IN THE CITED WORK

Work	Structure	Definition	Order changes	Cost per sample
serial switching [7]	analog; complementary-order block added at each switch	B	any number of switches	grows with switches
recursive, parallel schemes [8], [10], [31]	analog; switched constant-order ladders	D; B; B $\leftrightarrow$ D	a few switches	—
[32]	analog; one transfer function order as a design parameter	LTI (third) type of [2]	smooth $\alpha(t)$	fixed
tunable elements, filters [33]–[36]		FIR with current-order coefficients: A (inferred)	re-tuning	—
programmable ladder [37]	element values change with the order (moving poles)	compared with B; approximate (Thm. 2)	jumps, continuous	fixed
FPGA GL [24]; VO PID [25]	direct GL convolution	A (inferred [24]; stated [25])	at run time	$O(L)$, L = memory
hot-swapped Oustaloup (Sect. VII)	moving poles, state kept	none exactly (Thm. 2)	any	$O(S)$
exponential sums [26], [27]	fixed exponents, continuous-time Caputo	A	any $\alpha(t) \in (0, 1)$	$O(\log^2 n)$
hidden memory [38]	Taylor / hierarchical matrices	B-like (Caputo)	any	$O(N \log N)$ in total
this work	discrete fixed-pole bank	A, B; D, E by inversion	every sample	$O(K)$, $K \approx 20$ –50

tion and the memory length decide the error of a fitted VO model, and one bank fits and runs both definitions at a fixed cost (Sect. IX).

A fixed-point core realizes all four types and was verified bit-exact on an FPGA board (Sect. X). Proofs are in the Appendix; continuous-time results and implementation details are in the Supplementary Material; code, seeds and results are public.

II. VARIABLE-ORDER GL OPERATORS

Let T_s be the sampling period and $\alpha_n \in (-1, 1)$ the order at sample $n \geq 0$; $\alpha > 0$ is a derivative, $\alpha < 0$ an integral, and signals vanish for $n < 0$. With

$$w_r(a) = (-1)^r \binom{a}{r} = w_{r-1}(a) \frac{r-1-a}{r}, \quad g_r(a) = T_s^{-a} w_r(a), \quad (1)$$

with $w_0 = 1$, the four types are [7], [8], [10]

$$({}^A\Delta^\alpha x)_n = \sum_{r=0}^n g_r(\alpha_n) x_{n-r}, \quad (2)$$

$$({}^B\Delta^\alpha x)_n = \sum_{r=0}^n g_r(\alpha_{n-r}) x_{n-r}, \quad (3)$$

$$z_n = T_s^{-\alpha_n} x_n - \sum_{r=1}^n w_r(-\alpha_n) z_{n-r}, \quad (4)$$

$$z_n = T_s^{-\alpha_n} x_n - \sum_{r=1}^n w_r(-\alpha_{n-r}) T_s^{\alpha_{n-r}-\alpha_n} z_{n-r}, \quad (5)$$

with $z = {}^D\Delta^\alpha x$ in (4) and $z = {}^E\Delta^\alpha x$ in (5). The A-type has no memory of past orders: a change of α_n reweights the entire history. The B-type keeps each sample with the weights of its entry order. On a horizon of N samples, $[W_A(\alpha)]_{n,j} = g_{n-j}(\alpha_n)$ and $[W_B(\alpha)]_{n,j} = g_{n-j}(\alpha_j)$ are lower triangular, and row n of $W_A(-\alpha)z = x$ is (4), row n of $W_B(-\alpha)z = x$ is (5). Hence

$$W_D(\alpha) = W_A(-\alpha)^{-1}, \quad W_E(\alpha) = W_B(-\alpha)^{-1}, \quad (6)$$

the duality of [8], [10], [39]. For a varying order $W_A(\alpha)W_A(-\alpha) \neq I$, so the recursive types are genuinely different operators. For $0 < a < 1$ and $S_a = \sin(\pi a)/\pi$, the diffusive representations $s^{-a} = S_a \int_0^\infty \xi^{-a}(s+\xi)^{-1} d\xi$ and $s^a = S_a \int_0^\infty \xi^{a-1} s(s+\xi)^{-1} d\xi$ [17], [21] express every order on the same first-order elements: the order enters only through

the density in ξ . This is the property the paper builds on, in discrete time.

III. FIXED-POLE BANKS

Lemma 1. For $r \geq 1$ and $-1 < a < 1$, $w_r(a) = -S_a B(r-a, 1+a) = -S_a \int_0^1 \theta^{r-a-1} (1-\theta)^a d\theta$.

Proof. $w_r(a) = \Gamma(r-a)/(\Gamma(-a)\Gamma(r+1))$, $B(r-a, 1+a) = \Gamma(r-a)\Gamma(1+a)/\Gamma(r+1)$ and $\Gamma(-a)\Gamma(1+a) = -\pi/\sin(\pi a)$; for $a = 0$ both sides vanish. $\square$

The GL weights are thus a superposition of geometric sequences with an order-dependent density. With $\theta = e^{-u}$, $u = e^x$,

$$w_r(a) = -S_a \int_{-\infty}^{\infty} \varphi_a(e^x) e^{-(r-1)e^x} dx, \quad (7)$$

$$\varphi_a(u) = u e^{-(1-a)u} (1 - e^{-u})^a.$$

The trapezoidal rule on $u_k = u_{10} e^{kh}$, $k = 0, \dots, K-1$, gives order-independent poles $\theta_k = e^{-u_k}$ (the zero-order-hold images of continuous-time poles $-u_k/T_s$) and the realized weights

$$\hat{g}_r(a) = \delta_{r1} c_d(a) + \sum_k c_k(a) \theta_k^{r-1} \quad (r \geq 1), \quad (8)$$

$$c_k(a) = -S_a T_s^{-a} h \varphi_a(u_k), \quad \hat{g}_0(a) = T_s^{-a},$$

with frozen-order transfer function $\hat{H}_a(z) = T_s^{-a} + c_d(a)/z + \sum_k c_k(a)/(z-\theta_k)$. The tails are closed by the virtual trapezoid nodes beyond the grid: those below it are lumped onto θ_0 (matched at $r = 1$), and those above it contribute only at $r = 1$ and form the delay mode c_d . Since $\varphi_a > 0$, all residues have the sign of $-a$; $\hat{g}_0$ is exact, and at $a = 0$ the bank is exactly the identity, so it crosses the order zero continuously. A continuous-time version is given in the Supplementary Material.

The bank has K states s_k and a delay state s_d , and the order can be scheduled in two places (Fig. 1). In the output schedule (OS), $s_k[n+1] = \theta_k s_k[n] + v_n$, $s_d[n+1] = v_n$ and $y_n = T_s^{-\alpha_n} v_n + \eta_n$ with $\eta_n = c_d(\alpha_n) s_d[n] + \sum_k c_k(\alpha_n) s_k[n]$.

In the input schedule (IS), $s_k[n+1] = \theta_k s_k[n] + c_k(\alpha_n) v_n$, $s_d[n+1] = c_d(\alpha_n) v_n$ and $\eta_n = s_d[n] + \sum_k s_k[n]$. In both, the history η_n depends only on $v_0, \dots, v_{n-1}$, and changing the order never touches the state.

IV. DEFINITION BY STRUCTURE

Proposition 1 (Definition by structure). *For every order sequence in $(-1, 1)$, every input v and zero initial state, OS gives $y_n = \sum_{r=0}^n \hat{g}_r(\alpha_n) v_{n-r}$ and IS gives $y_n = \sum_{r=0}^n \hat{g}_r(\alpha_{n-r}) v_{n-r}$: the output-scheduled bank is the A-type and the input-scheduled bank the B-type, with the realized weights.*

Proof. In OS, $s_k[n] = \sum_{r \geq 1} \theta_k^{r-1} v_{n-r}$ and $s_d[n] = v_{n-1}$, so $\eta_n = \sum_{r \geq 1} \hat{g}_r(\alpha_n) v_{n-r}$. In IS, $s_k[n] = \sum_{r \geq 1} \theta_k^{r-1} c_k(\alpha_{n-r}) v_{n-r}$ and $s_d[n] = c_d(\alpha_{n-1}) v_{n-1}$, so $\eta_n = \sum_{r \geq 1} \hat{g}_r(\alpha_{n-r}) v_{n-r}$. $\square$

No switching term appears, so the accuracy is set by the frozen-order design alone. Let $\varepsilon_R = \sup_a \max_{1 \leq r < R} |\hat{g}_r(a)/g_r(a) - 1|$ over the design range of orders. For $n < R$, in OS,

$$|y_n - (\Delta^\alpha v)_n| \leq \varepsilon_R \sum_{r \geq 1} |g_r(\alpha_n)| |v_{n-r}|, \quad (9)$$

and the same with α_{n-r} for IS and the B-type. The bound is relative to the weights: for derivatives, whose weights nearly cancel, relative output errors for smooth inputs can exceed ε_R .

Proposition 2 (Recursive types by inversion). *Run the OS (IS) bank at the orders $-\alpha$ with history η_n . The recursion $v_n = T_s^{-\alpha_n}(x_n - \eta_n)$, $z_n = v_n$, gives $z = \hat{W}_A(-\alpha)^{-1}x$ ($\hat{W}_B(-\alpha)^{-1}x$): the D-type (E-type) with realized weights, with the duality (6) exact in exact arithmetic, at $O(K)$ per sample.*

Proof. By Proposition 1, row n of $\hat{W}_A(-\alpha)v = x$ is $T_s^{\alpha_n} v_n + \eta_n = x_n$, solved forward since $T_s^{\alpha_n} \neq 0$. $\square$

Because every row of the A-type error matrix and every column of the B-type error matrix holds a single order, the weight errors also bound the realized operators as a whole. Let $\|\cdot\|_p$ be the induced ℓ^p norm of an $N \times N$ matrix and $|M|$ its entrywise modulus.

Theorem 1 (Operator-norm bounds). *Let $\mathcal{S} \subset (-1, 1)$, $N \leq R$, $e_r(a) = \hat{g}_r(a) - g_r(a)$, $\rho_{\text{row}} = \sup_{a \in \mathcal{S}} \sum_{r=1}^{N-1} |e_r(a)|$ and $\rho_{\text{col}} = \sum_{r=1}^{N-1} \sup_{a \in \mathcal{S}} |e_r(a)|$. For every order sequence in $\mathcal{S}$, with $E_T = \hat{W}_T - W_T$:*

- (a) $\|E_A\|_\infty \leq \rho_{\text{row}}$, $\|E_A\|_1 \leq \rho_{\text{col}}$, $\|E_B\|_1 \leq \rho_{\text{row}}$, $\|E_B\|_\infty \leq \rho_{\text{col}}$; each bound is attained for finite $\mathcal{S}$.
- (b) $\|E_T\|_p \leq \varepsilon_R \|W_T\|_p$ for $1 \leq p \leq \infty$, $T \in \{A, B\}$; for $p \in \{1, \infty\}$ the relative operator error, i.e. the worst-case relative output error, never exceeds ε_R .
- (c) For $(T, F) \in \{(D, A), (E, B)\}$, let E_F^- be the error of $\hat{W}_F(-\alpha)$ and $q = \|W_T\|_p \|E_F^-\|_p < 1$. Then $\|E_T\|_p \leq \frac{q}{1-q} \|W_T\|_p$, and the same holds with the realized $\hat{W}_T$ in place of W_T . If all orders are negative and $\hat{g}_1(-\alpha_n) < 0$ for all n , then $\hat{W}_T \geq 0$ entrywise and $\|\hat{W}_T\|_\infty$ is the peak of the realized step response: one step response of the bank ($O(NK)$) certifies the error a posteriori.

The proof is in Appendix C. By (b), $q \leq \varepsilon_R \kappa_p$ with $\kappa_p = \|W_F\|_p \|W_F^{-1}\|_p$; for a constant order a , $\kappa_\infty = (2 - w_{N-1}(a - 1)) w_{N-1}(-a - 1) \approx 2N^a / \Gamma(1 + a)$, 71 for $a = 0.5$, $N = 1000$. For recursive integrals this amplification is real, so a guaranteed design uses $\varepsilon / \kappa_\infty$.

The fixed-pole structure is also necessary in the following sense.

Theorem 2 (Necessity). *Let $\Sigma_i = (F_i, b_i, c_i^\top, d_i)$, $i = 1, 2$, be minimal realizations of dimension S of two frozen-order operators, run as Σ_1 for $n < m$ and Σ_2 for $n \geq m$, $m \geq S + 1$, with the state mapped as $x[m] \leftarrow \Phi x[m]$. (a) For every input, the output for $n \geq m$ is the response of Σ_2 to the whole input (A-type behaviour) iff $F_2 = \Phi F_1 \Phi^{-1}$ and $b_2 = \Phi b_1$. (b) It is the response of Σ_1 to the inputs before m plus that of Σ_2 to the inputs from m on (B-type behaviour) iff $F_2 = \Phi F_1 \Phi^{-1}$ and $c_2^\top = c_1^\top \Phi^{-1}$.*

The proof is in Appendix A; the same statement holds in continuous time.

Corollary 1. *If the poles of a frozen-order realization depend on the order, as in the Oustaloup family [11], no state map (in particular not the hot swap $\Phi = I$) realizes the A- or B-type at a switch. The fixed-pole bank satisfies (a) with $\Phi = I$ in OS and (b) with $\Phi = I$ in IS.*

Least-squares maps fitted to an input ensemble can make the definitional error small in floating point, but they are dense, specific to each pair of orders, depend on the input statistics, and lose 3 to 9 orders of magnitude of accuracy in 24-bit arithmetic (Supplementary Material).

V. COMPLETELY MONOTONE KERNEL FAMILIES

The construction used two properties of the GL weights: for each order they are a superposition of geometric sequences with a density of one sign, smooth on a logarithmic scale. A family of causal kernels $\{k_a\}_{a \in \mathcal{A}}$ is a *completely monotone (CM) family* if $k_a(0) \neq 0$ and $k_a(r) = \sigma_a \int_0^\infty e^{-(r-1)u} m_a(u) du$ for $r \geq 1$, with $\sigma_a \in \mathbb{R}$ and $m_a \geq 0$; by Hausdorff's theorem these are the completely monotone sequences [40]. Its A- and B-types are (2), (3) with $k_a(r)$ in place of $g_r(a)$, and its D- and E-types follow from (6). The bank is built as above, with residues $c_k(a) = \sigma_a h u_k m_a(u_k)$.

Theorem 3 (CM families). (a) *Propositions 1 and 2 and Theorems 1 and 2 hold for every CM family; the parameter a need not be an order, and all residues have the sign of σ_a .* (b) *Assume: (H1) $f_{a,r}(x) = e^x m_a(e^x) e^{-(r-1)e^x}$ is analytic in $|\text{Im } x| < d < \pi/2$ with $L_d = \sup_{a,r,|y|<d} \int |f_{a,r}(x + iy)| dx / \int f_{a,r} < \infty$; (H2) $c_- u^{\beta_a-1} \leq m_a(u) \leq c_+ u^{\beta_a-1}$ on $(0, u_*)$, $\beta_a \in [\beta_-, \beta_+]$; (H3) $m_a(u) \leq C_\infty e^{-\gamma u}$ on $[u_*, \infty)$. Let $\vartheta = \min_{\beta_- \leq \beta \leq \beta_+} \int_0^{u_*} t^{\beta-1} e^{-t} dt$, $C_{\text{lo}} = c_+ / (c_- \beta_- \vartheta)$ and $C_{\text{hi}} = C_\infty / ((1 + \gamma) c_- \vartheta)$. Then, for $u_{\text{lo}} \leq u_*$, $u_{\text{hi}} \geq \max(u_*, 1, \beta_+ \ln 2)$ and $1 \leq r < R$,*

$$\left| \frac{\hat{k}_a(r)}{k_a(r)} - 1 \right| \leq \frac{2L_d}{e^{2\pi d/h} - 1} + C_{\text{lo}} ((R-1)u_{\text{lo}})^{1+\beta_a} + C_{\text{hi}} e^{-(1+\gamma)u_{\text{hi}}}. \quad (10)$$

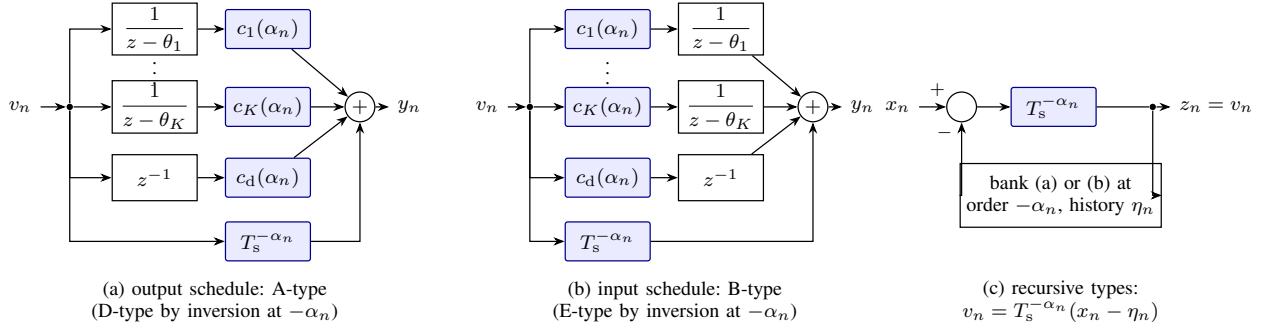


Fig. 1. Fixed-pole bank. The poles θ_k and the delay z^{-1} are common to every order; only the shaded weights depend on α_n . (a) Order in the output weights. (b) Order in the input weights. (c) Recursive types: the history of bank (a) or (b) at order $-\alpha_n$ is removed and scaled by $1/\hat{g}_0(-\alpha_n) = T_s^{-\alpha_n}$.

(c) For $0 < \varepsilon \leq \min(1, 4C_{lo})$, $h = 2\pi d / \ln(1 + 4L_d/\varepsilon)$, $u_{lo} = \min(u_*, (\varepsilon/4C_{lo})^{1/(1+\beta_-)} / (R-1))$, $u_{hi} = \max(u_*, 1, \beta_+ \ln 2, \ln(4C_{hi}/\varepsilon)/(1+\gamma))$ and $K = \lceil \ln(u_{hi}/u_{lo})/h \rceil + 1$, the relative weight error is at most ε for all a and $1 \leq r < R$, and $K = O(\ln(1/\varepsilon) \ln(R/\varepsilon))$ uniformly in a .

Lemma 2 (GL constants). For $|a| \leq \bar{a} < 1$, the GL family satisfies (H1)–(H3) for every $d < \pi/2$ with $\beta_a = 1 + a$, $\gamma = 1 - \bar{a}$, $u_* = 1$, $c_- = (1 - e^{-1})e^{-2}$, $c_+ = C_\infty = (1 - e^{-1})^{-1}$ and $L_d \leq (2/(1 - e^{-2}))^{\bar{a}} (\cos d)^{-(1+\bar{a})}$.

The proofs are in Appendix D. With $h \approx \pi^2 / \ln(1/\varepsilon)$, part (c) gives $K \approx \ln(1/\varepsilon) \ln(R/\varepsilon) / \pi^2$ to leading order. Examples are time-varying distributed orders, whose bank has the same poles and averaged residues (A- and B-types still at $O(K)$), and fixed tempering $e^{-\lambda r} g_r(a)$ [41], realized exactly by the poles $e^{-\lambda} \theta_k$; a tempering parameter that varies in time moves the poles and falls under Theorem 2. In continuous time Bernstein’s theorem plays the role of Hausdorff’s [40], [42].

VI. DESIGN RULE AND INVERSE STABILITY

The rule chooses h , u_{lo} , u_{hi} and K from ε , the memory R (samples) and an order range, without fitted constants. With the tail closure the realized weights are the infinite trapezoidal rule applied to (7) apart from two tail residuals, so the error has three terms. The quadrature term is the first alias of the strip-analytic integrand (Poisson summation [43]); for large r , Stirling’s formula gives

$$E_q^\infty(a, h) = 2\sqrt{2\pi} (2\pi/h)^{a+1/2} e^{-\pi^2/h} / \Gamma(1+a), \quad (11)$$

and small lags are evaluated directly. The lower-tail residual grows with the lag, $E_{lo} = (r-1)u_{lo}^{2+a} H_h(1+a, 2+a) / B(r-a, 1+a)$ at $r = R-1$ with $H_h(p, q) = G_h(p) - G_h(q)$, $G_h(p) = h/(e^{ph} - 1)$, which ties u_{lo} to the memory; the upper-tail residual appears first at $r = 2$. The tolerance is split $\varepsilon/2$, $\varepsilon/4$, $\varepsilon/4$: h from the quadrature term (a one-dimensional root), u_{lo} in closed form, u_{hi} by a monotone root, and $K = \lceil \ln(u_{hi}/u_{lo})/h \rceil + 1$.

The recursive types run $1/\hat{H}$, whose dynamics matrix has the characteristic polynomial $z \prod_k (z - \theta_k) \hat{H}(z) / \hat{g}_0$ in both schedules.

Proposition 3 (Inverse stability). Let $\hat{H}(z) = g_0 + c_d/z + \sum_k c_k/(z - \theta_k)$, $g_0 > 0$, distinct $\theta_k \in (0, 1)$. (i) If all $c_k > 0$ and $c_d \geq 0$ (integral bank), $1/\hat{H}$ is stable iff $\hat{H}(-1) > 0$. (ii) If all $c_k < 0$ (derivative bank), $1/\hat{H}$ is stable iff $\hat{H}(1) > 0$ and either $c_d \leq 0$ or $\hat{H}(-1) > 0$. (iii) If $|\hat{g}_r/g_r - 1| \leq 1/3$ for $r = 1, 2$, then $\hat{H}(-1) > 0$.

The proof is in Appendix B. So an integral bank of the rule always has a stable inverse, and a derivative bank has one iff its realized DC gain $\hat{H}(1) = \sum_r \hat{g}_r$ is positive. The exact GL derivative has $\sum_r g_r = 0$; the finite memory adds about $S_a T_s^{-a} u_{lo}^a / (a(1+a))$, which for large orders can be smaller than the quadrature error. A DC floor raises the delay residue to $\hat{H}(1) \geq 0.01 S_a T_s^{-a} u_{lo}^a / (a(1+a))$, changing only $\hat{g}_1$, and makes every inverse stable. The signs of $\hat{H}(\pm 1)$ are computed to full precision, unlike the dominant pole, which lies within 10^{-9} of $z = 1$.

VII. NUMERICAL RESULTS

Unless stated otherwise, $T_s = 1$ ms; references are the literal definitions (2)–(5) evaluated in $O(N^2)$. The *definitional error* is the distance of a switched realization from its own A-, B-, D- or E-type built from the same frozen-order systems. Baselines are Oustaloup approximations [11] with $S = 2N + 1$ states in parallel and cascade form, discretized by zero-order hold and hot-swapped.

Definition consistency. A bank with 32 modes was compared with the GL types over 7 order profiles and 3 inputs: OS against the A-type and IS against the B-type gave total errors of 1.9×10^{-6} to 2.0×10^{-3} . The definitional errors (Table II) are zero to rounding for the bank, as Proposition 1 predicts, and reach 3×10^3 for the hot-swapped cascade. One bank ($K = 41$) ran all four types within 6.9×10^{-5} of the literal definitions, with the duality (6) exact to 2×10^{-14} .

Design rule on a sealed holdout. With each error term isolated, the ratio of measured to predicted error was 0.49–1.05 in discrete and 0.99–1.01 in continuous time. We then drew 400 random specifications ($\varepsilon \in [10^{-5}, 10^{-2}]$, $R \in [10^2, 10^5]$ or 0.5 to 6 decades, random order ranges in $[-0.95, 0.95]$), recorded their SHA-256 digest before evaluation, and evaluated them once (Fig. 2): all 400 were met (one-sided 95% Clopper–Pearson bound 98.5% per domain [44]), at a median 0.41–0.50 of ε , with K at most three modes above

TABLE II
DEFINITIONAL ERROR UNDER PIECEWISE-CONSTANT ORDERS (DISCRETE TIME; OUSTALOUP WITH $S = 31$)

Realization	vs own A-type	vs own B-type
bank, output schedule	0 (exact)	= A-B gap
bank, input schedule	= A-B gap	$\leq 10^{-14}$
Oustaloup parallel, hot swap	4×10^{-6} –0.13	7×10^{-3} –1.0
Oustaloup cascade, hot swap	7×10^{-3} – 3×10^3	0.03– 4.8×10^2

TABLE III
THEOREM 1 ON DENSE OPERATORS ($N = 1000$, ELEVEN ORDER SEQUENCES): MEASURED OVER BOUNDED QUANTITIES

Types	Quantity	$K = 22$	$K = 49$
A, B	$\ E\ _p/\text{bound (a), } p = 1, \infty$	0.28–1.00	0.45–1.00
A, B	$(\ E\ _p/\ W\ _p)/\varepsilon_R$	0.04–0.39	0.03–0.45
D, E integrals	$\ E\ _\infty/\text{bound (c)}$	0.23–0.31	0.006–0.23
D, E	$\max(\ E\ _\infty/\ W\ _\infty)/\varepsilon_R$	22	17

the smallest sufficient size. Each decade of memory adds about three modes and each decade of accuracy seven to ten ($K = 29$ for $\varepsilon = 10^{-4}$, $R = 10^3$). Over 35 designs the fit $K \approx 0.57 + 1.06 \ln(1/\varepsilon) + 0.53 \ln R + 0.106 \ln(1/\varepsilon) \ln(R/\varepsilon)$ reproduces every K within 0.7 modes; Theorem 3 predicts $1/\pi^2 = 0.101$ for the product term. With the constants of Lemma 2, part (c) of Theorem 3 gives guaranteed banks 1.4–1.6 times the size of the rule, with errors 13–17 times below ε . With the DC floor the inverse was stable in all 200 discrete-time holdout designs (101 of 200 without it).

Operator norms. For $N = 1000$ and eleven order sequences, including two adversarial ones, the dense realized and literal operators gave Table III. No A- or B-type norm exceeded its bound, the bounds of part (a) were attained to four digits, and the relative operator error was at most $0.45 \varepsilon_R$. For the recursive types the relative error reached 22 times ε_R , as the conditioning predicts, and the certificate of part (c) held.

Cost against accuracy. Fig. 3 compares four realizations of the A-type over 39 order levels ($N = 1000$): the fixed-pole bank of the rule; fixed poles with residues fitted per level by a linear program, without and with the sign and DC constraints of Proposition 3; moving poles (a rule-designed grid per level, hot-swapped); and truncated GL convolution. Moving poles reach a constant-order accuracy with two thirds of the states, but stay at 0.72–1.1 (A) and 0.17–0.23 (B) under switching for every K , as Theorem 2 predicts. Integral orders need the whole memory: truncation leaves 0.41 at $L = 512$. Fitted residues save 40–50 % of the poles unconstrained, but then lose the stability certificate at up to 11 of 19 derivative levels; with the constraints the saving is 20–30 %. The rule thus trades a fifth to a quarter of the states for a closed-form, validated design that keeps the residue signs.

VIII. ORDER TRACKING

Consider a fractional element, such as an ultracapacitor or a viscoelastic material, excited by a known input x while its memory exponent drifts. The task is to track the order from

$$y_n = (\mathbf{T}^\top \Delta^\alpha x)_n + v_n, \quad v_n \sim \mathcal{N}(0, \sigma^2), \quad \mathbf{T} \in \{\mathbf{A}, \mathbf{B}\}, \quad (12)$$

with a random walk $\alpha_{n+1} = \alpha_n + w_n$, $w_n \sim \mathcal{N}(0, q)$. Unscented fractional-order Kalman filters (UFOKF) keep the order in the filter state and evaluate the GL memory directly [39]. The bank provides the measurement model and its derivative at $O(K)$ cost for either type, and its structure decides which estimator is natural.

A-type. With the order in the output weights, the states of OS are driven by the known input alone, so $y_n = \varphi_n(\alpha_n) + v_n$ with $\varphi_n(a) = T_s^{-a} x_n + c_d(a) s_d[n] + c(a)^\top s_n$: a memoryless measurement of the current order whose regressors are shared by all orders. An extended Kalman filter (EKF) needs φ_n and φ'_n , at $O(K)$; the exact likelihood of G order hypotheses costs $O(GK)$, so a grid (point-mass) Bayes filter becomes affordable.

B-type. With the order in the input weights, the state of IS carries the order history, and an EKF on (s, s_d, α) of dimension $K + 2$ costs $O(K^2)$; in the literal GL form the filter would have to carry the whole order history.

Bayesian Cramér–Rao bound. With Gaussian noise of known variance, the Fisher information of the order path given the path is $G^\top G/\sigma^2$, where G is the Jacobian of the noise-free output. It is diagonal for the A-type, $G_{nn} = h_n = \sum_{r \geq 1} w'_r(\alpha_n) x_{n-r}$, and strictly lower triangular for the B-type, $G_{nm} = w'_{n-m}(\alpha_m) x_m$ for $m < n$, where $w'_r = \partial w_r / \partial a$ follows by differentiating the recursion (1). Its expectation over the prior of the path, plus the information of the random walk, is the Bayesian (Van Trees) information, whose inverse bounds the mean-square error of every estimator; restricted to the data up to n it gives the filtering bound of causal estimators [45]. For the A-type the information is diagonal and $J_n = (q + J_{n-1}^{-1})^{-1} + \mathbb{E}[h_n^2]/\sigma^2$. For the B-type in sample units, $\hat{g}_0 = 1$ for every order, so α_n does not enter y_n ; its information arrives only later, through the memory. The causal estimate of the present B-type order is therefore essentially a prediction from the past, and the smoothing bound (all data) can lie far below the filtering bound. We condition on the known input, average the information over prior paths by Monte Carlo, and obtain both bounds from a Kalman recursion on the growing path ($O(n^3)$, off line).

Experiments. In sample units ($n = 2000$), with a known AR(1) input of pole 0.98, data from the literal GL definitions, white noise at 20, 40 and 60 dB and 50 Monte Carlo runs, one rule-designed bank ($\varepsilon = 10^{-5}$, $|\alpha| \leq 0.95$, $K = 40$, co-efficients interpolated by cubic splines) served all estimators. In the first scenario the order is constant at 0.3, ramps to 0.7, jumps to 0.2 and then oscillates; the EKFs inflate the order variance when the normalized innovation exceeds 16, which detects jumps, and the grid filter (381 orders) mixes its random walk ($q = 10^{-5}$) with a uniform switch. Every estimator was also run on data of the other type. In the second scenario the orders are drawn from the random-walk prior itself ($q = 10^{-5}$, $\alpha_0 \sim \mathcal{N}(0.3, 0.01)$), and the estimators, tuned to it without jump gating, are compared with the bounds.

Results with a jump (Table IV, Fig. 4). With the matched type the error decreases with the SNR, to 1.3×10^{-3} for the A-type grid filter and 1.2×10^{-2} for the B-type EKF at 60 dB. With the wrong type it *increases* with the SNR, to 0.14–0.24 at 60 dB: a wrong definition biases the estimate, and more

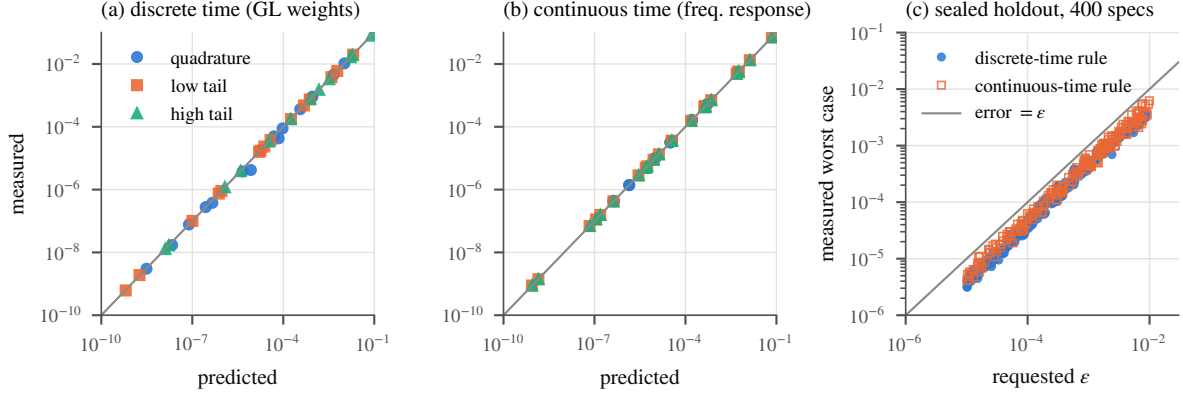


Fig. 2. Analytic error model. (a, b) Each term isolated, measured against predicted. (c) Sealed holdout: measured worst-case error against the requested tolerance for 400 random specifications.

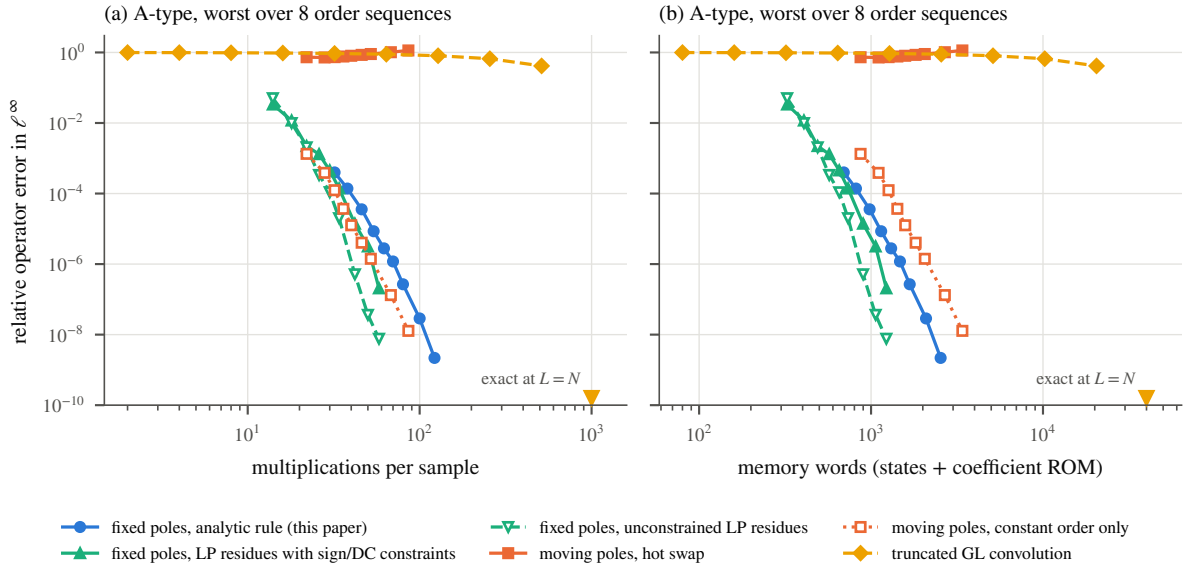


Fig. 3. Accuracy against cost for the A-type ($N = 1000$, 39 order levels). Solid: worst relative operator error over eight variable-order sequences; dotted: moving poles at constant order only.

TABLE IV
ORDER TRACKING WITH A RAMP AND A JUMP: MEDIAN RMSE OF THE ORDER OVER $0.2 \leq t < 4$ s (50 RUNS). “WRONG”: DATA OF THE OTHER TYPE. COSTS ARE MULTIPLICATIONS PER SAMPLE ($K = 40$, $G = 381$, $n = 2000$)

Estimator (cost)	Data	20 dB	40 dB	60 dB
A-type grid filter ($\approx 16\,000$)	A	0.018	0.0040	0.0013
	B, wrong	0.029	0.059	0.140
A-type EKF ($\approx 3(K+2)/\text{iteration}$)	A	0.026	0.0083	0.017
	B, wrong	0.037	0.099	0.213
B-type EKF ($\approx 4(K+2)^2$)	B	0.027	0.015	0.012
	A, wrong	0.032	0.054	0.238
<i>UFOKF-type unscented filters on the GL sum (our implementation)</i>				
A-type, memory 100 (≈ 600)	A	0.036	0.138	0.244
A-type, full memory ($\approx 3n$)	A	0.027	0.016	0.039
B-type, window 5 ($\approx n$)	B	0.028	0.014	0.012

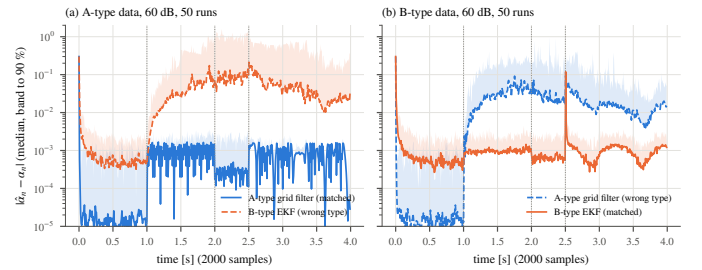


Fig. 4. Ramp-and-jump scenario at 60 dB: absolute error of the order (median over 50 runs, band to the 90th percentile). Solid: filter of the type that generated the data; dashed: the other type. Dotted lines: start and end of the ramp, and the jump.

data do not remove the bias. While the order is constant the two definitions coincide and both filters are accurate; the bias appears as soon as the order varies. The A-type EKF has a heavy tail at high SNR (90th percentile 0.11–0.15), because the

likelihood of one sample has several maxima at the jump; the grid filter avoids this. The A-type EKF on the bank reproduced the same EKF on the literal GL weights to 9×10^{-6} , at about $3(K+2)$ instead of $3n$ multiplications per iteration, and the full-memory UFOKF-type filter and the same filter on the bank

TABLE V
RANDOM-WALK ORDERS DRAWN FROM THE PRIOR: RMSE OF THE ORDER OVER RUNS AND OVER $0.2 \leq t < 4$ s, AND THE BAYESIAN CRB CONDITIONED ON THE KNOWN INPUT (50 RUNS; RATIO TO THE FILTERING BOUND IN BRACKETS)

Data		20 dB	40 dB	60 dB
A	grid filter	0.0128 [1.14]	0.0046 [1.30]	0.0016 [2.14]
	EKF	0.0128 [1.15]	0.0046 [1.30]	0.0014 [1.82]
	filtering BCRB	0.0112	0.0035	0.00074
	smoothing BCRB	0.0079	0.0027	0.00067
B	augmented EKF	0.0134 [1.06]	0.0056 [1.01]	0.0035 [1.00]
	filtering BCRB	0.0127	0.0055	0.0035
	smoothing BCRB	0.0083	0.0032	0.0011

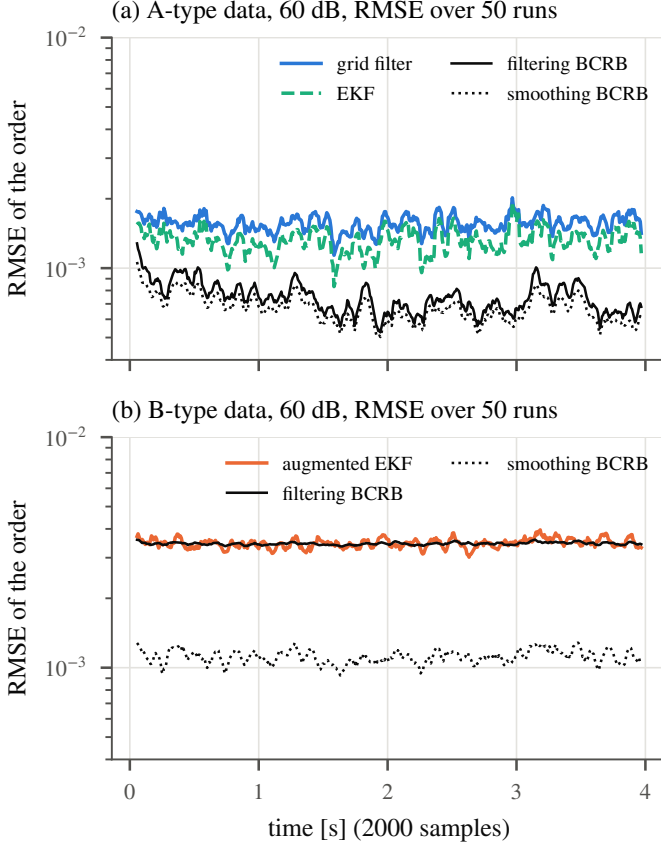


Fig. 5. Random-walk orders at 60dB: RMSE of the order over 50 runs (running mean over 28 samples) and the Bayesian CRB conditioned on the input, for causal estimators (filtering) and with all data (smoothing).

agreed to 10^{-4} in 144 of 150 runs. A truncated GL memory biases the estimate (0.24 at 60 dB with 100 lags). For the B-type, the windowed unscented filter matched the bank's EKF, but it keeps and updates the whole input history, $O(n)$ per sample, whereas the bank's state has $K + 2$ entries.

Results against the bound (Table V, Fig. 5). The B-type EKF attains the filtering bound: its RMSE is 1.06, 1.01 and 1.00 times the bound at 20, 40 and 60 dB. The A-type filters are within a factor of 1.15 at 20 dB and 1.3 at 40 dB. At 60 dB the grid filter is limited by its spacing (0.005, i.e. 1.4×10^{-3} RMS), and the EKF stays 1.8 times above the bound. The EKF on the bank reproduces the EKF on the literal GL weights (to 9×10^{-6} in the first scenario), so the gap is not due to

the bank; a Bayesian bound need not be attainable. The two types differ structurally. For the A-type the smoothing bound is close to the filtering bound, because each sample measures the present order. For the B-type it is three times lower at 60 dB: the present order is observed only through later samples, so a fixed-lag smoother could gain up to a factor of three, while no causal estimator can.

IX. MEASURED DATA: A LITHIUM-ION CELL

Fractional elements are common in battery models [46], and variable-order versions let the order depend on the state of charge [47]–[49]. Once the order moves, a model identified with one definition and executed by a realization of the other is a different model. We tested how much this matters on public measurements of a Panasonic 18650PF cell [50]: four drive cycles (UDDS, LA92, US06, HWFET) at each of five chamber temperatures from 25 to -20°C , and two warming runs of four mixed cycles each (10 to $24\text{--}27^\circ\text{C}$ and -20 to $12\text{--}17^\circ\text{C}$).

Model. With the terminal voltage v , the current i (positive for charge), the state of charge z from coulomb counting and the open-circuit voltage U of the C/20 test at 25°C ,

$$v_n - U(z_n) = c(z_n) + R_0(z_n)i_n + R_1(z_n)(\psi_\tau i)_n + \kappa(z_n)(^T\Delta^{-\beta(z)}i)_n, \quad T \in \{A, B\}, \quad (13)$$

at $T_s = 1$ s, where ψ_τ is a unit-gain first-order lag, the gains are piecewise linear in z (knots 0.1 apart), and the order is piecewise linear in z on six knots, so it changes at every sample. In the A-type the present order weights the whole past current; in the B-type each current sample keeps the order of the moment it flowed. Baselines are a constant order ($A = B$) and one or two lags instead of the fractional term (1RC, 2RC). For fixed τ and order knots the gains follow from least squares; τ (1 to 5000 s) and the knots (0.02 to 0.95) were found by coordinate search. One rule-designed bank ($\varepsilon = 10^{-4}$, $R = 25\,000$, $K = 29$) served all orders and both types; the A-type columns of all 94 grid orders come from one state, and a candidate order path costs $O(nK)$ for either type.

Protocol. In each group, every model was fitted jointly to three cycles and simulated the fourth from its current alone, with every parameter, the order included, read from the z of the held-out record. Fits to a single cycle did not transfer (RC+FO: 12 mV in sample, 92–101 mV on other cycles, over 84 runs): the slow terms are nearly collinear with z , the integral of the current.

Results. Run with the A-type operator, the B-type models were worse in all 28 folds, by a median factor of 4.4 (at least 1.06); run with the B-type operator, the A-type models were worse in 23 of 28 folds, by a median factor of 2.1 (Table VI, Fig. 6a). The fitted order laws themselves depend on the definition (Fig. 6b, c): at the five constant temperatures the B-type order drops at the start of the discharge, to 0.11–0.21 at $z = 1$ against 0.23–0.64 below, whereas the A-type laws stay within 0.33–0.43 away from $z = 1$ (0.22–0.47 at 25°C) and lie above the B-type ones at $z = 1$. An order law reported for a VO battery model is therefore meaningful only with its definition. A varying order helped only at 25°C , where the

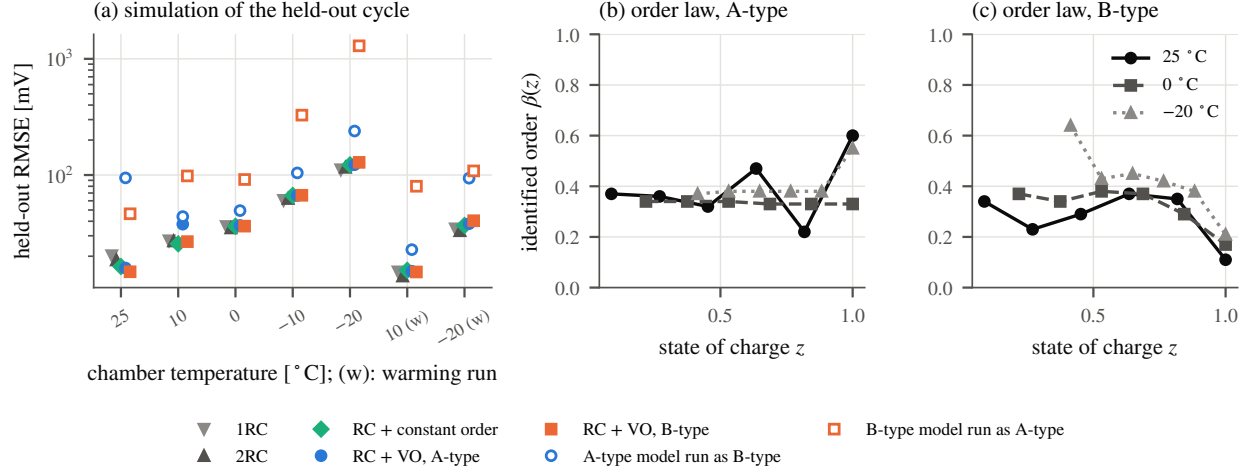


Fig. 6. Battery data. (a) Held-out RMSE (Table VI); hollow markers: fitted VO models run with the operator of the other type. (b, c) Order laws $\beta(z)$ fitted to all four cycles of a temperature with the A- and B-type operators.

TABLE VI

BATTERY DATA: RMSE (mV) OF THE SIMULATED VOLTAGE ON THE HELD-OUT CYCLE, MEAN OVER FOUR FOLDS. THE LAST TWO COLUMNS RUN THE FITTED VO MODELS WITH THE OPERATOR OF THE OTHER TYPE. BOLD: LOWEST OF THE ROW

Group	1RC	2RC	RC + fractional			other type	
			const.	VO-A	VO-B	A as B	B as A
25 °C	20.2	18.6	16.3	15.8	14.7	94	46
10 °C	27.2	27.0	25.6	37.7	26.7	44	98
0 °C	36.1	35.0	36.2	36.8	36.3	49	92
−10 °C	60.6	62.7	66.7	66.7	66.9	104	328
−20 °C	111.1	116.4	122.3	122.8	128.5	239	1295
10 °C, warming	14.7	13.5	15.1	14.9	14.6	23	80
−20 °C, warming	34.4	33.1	36.8	38.1	40.4	94	109

TABLE VII

BATTERY DATA: FITTED VO MODELS WITH THE FRACTIONAL TERM REALIZED IN OTHER WAYS (HELD-OUT RMSE IN mV, MEAN OVER 28 FOLDS; MEDIAN RATIO TO THE BANK; LARGEST DEVIATION OF THE FRACTIONAL TERM FROM THE LITERAL GL SUM, RELATIVE TO ITS PEAK)

Realization	mult./sample	A	B	ratio	dev. from GL
bank, $K = 29$	60	47.5	46.9	1	3.2×10^{-6}
GL, full memory	$n/2$ (mean)	47.5	46.9	1.00	0
GL, 600 lags	600	251	245	6.4–7.7	0.74
GL, 60 lags	60	347	358	10.3–11.5	0.89
moving poles, hot swap, $K = 22$	46	48.3	47.5	1.01	0.10

B-type model had the lowest held-out error (14.7 mV against 16.3 for a constant order and 18.6 for 2RC; best in three of four folds). At 0 °C and below, and in both warming runs, an RC model was best, and at 0 °C and below every model erred by 35–128.5 mV. Linearized at the states of charge of the impedance sweeps in the same data set, every model's impedance magnitude between 1.4 mHz and 0.1 Hz was about 0.9 of the measured one at 25 and 10 °C, 0.7 at 0 °C and 0.4 at −20 °C: the drive cycles see a much lower impedance than a small-signal sweep, consistent with a current-dependent charge-transfer resistance and self-heating, which no model linear in the current contains.

Other realizations. With the same gains and order laws (Table VII), the bank reproduced the literal GL sum to

3.2×10^{-6} at a fixed cost, where the GL sum costs $O(n)$ per sample. Truncating the memory multiplied the error by 6 to 11: the cell remembers its current far beyond 600 s. Moving poles (one rule-designed bank per order level of a 0.01 grid, hot-swapped) did almost as well as the bank here, because the order laws are smooth and the level changed only between neighbouring grid values; the fractional term deviated from its definition by up to 10 %. A moving-pole realization fails at large order steps (Sect. VII), not at small ones. On these data the definition and the memory length decide the error; the pole structure matters little. The experiment does not show that a variable order improves battery models in general.

X. FIXED-POINT REALIZATION AND FURTHER APPLICATIONS

In sample units ($T_s = 1$) the inversion of Proposition 2 needs no divider, and the physical gain $T_s^{-\alpha_n}$ is applied once per sample. A time-multiplexed Verilog core realizes all four types with order and type as inputs at every sample: an order change is a ROM address, with no reload and no extra cycle. With an exact rational test of the signs of $\hat{H}_q(\pm 1)$ for every quantized ROM row, 64 (A/B) and 51 (A/B/D/E) of 512 derivative rows had unstable inverses with the floating-point DC floor alone; a quantization-aware floor, which raises the delay mantissa in LSB steps, brings both to zero. The smallest configurations meeting 0.1ϵ on a stress set use 36/49/16 (A/B) and 48/61/25 (A/B/D/E) bits for signal, state and coefficient mantissa. On a Zynq-7020 (Vivado, out of context) they need 3214/4278 LUTs, 11/15 DSP slices and 46/64 block RAMs and close at 44.3/39.3 MHz, i.e. 0.33/0.29 million samples per second at 135 cycles per sample. On a PYNQ-Z1 board both were bit-exact on all 31 744 and 62 464 test vectors, and a 2^{24} -sample D-type run at the worst quantized row matched the golden model in all 256 block records without overflow.

The same bank streams multifractional Brownian motion of both types: the Riemann–Liouville form is an A-type integral of white noise of order $H(t) + \frac{1}{2}$ [51], [52], and the B-type variant corresponds to memory-multifractional Brownian

motion [53]. An integer integration is split off exactly, before the bank for the A-type and after it for the B-type, so one bank of order $\frac{1}{2} - H$ covers $0 < H < 1$ at 47–55 multiplications per sample; at a jump of H the A-type path is discontinuous and the B-type path is not (Supplementary Material).

XI. CONCLUSION

For a finite-dimensional realization of a VO operator, the definition it implements is a property of its structure. If the poles move with the order, no state map makes a switched realization exact for the A- or B-type; if the poles are fixed and the order sits in the output or input weights, the realization is the A- or B-type for every order sequence, and inverting it gives the D- and E-types with exact duality. The weight error bounds the realized operators as a whole, the construction covers every completely monotone kernel family, and an analytic rule with a DC floor sizes the bank and keeps every inverse stable. In estimation, the bank makes the order-independent regressors of the A-type available at $O(K)$ and exact grid filtering affordable, and on measured battery data the definition and the memory length, not the pole structure of a smooth realization, decide the error of a fitted VO model.

APPENDIX A PROOF OF THEOREM 2

Write $\mathcal{C}_i = [b_i, F_i b_i, \dots, F_i^{S-1} b_i]$ and $\mathcal{O}_i = [c_i, F_i^\top c_i, \dots, (F_i^\top)^{S-1} c_i]^\top$, both invertible by minimality [54].

(a) For $n \geq m$ the switched output is $d_2 v_n + c_2^\top F_2^{n-m} \Phi x_1[m] + c_2^\top \sum_{m \leq j < n} F_2^{n-1-j} b_2 v_j$. The response of Σ_2 to the whole input differs from it only by $\Phi x_1[m]$ being replaced by $x_2[m] = \sum_{j < m} F_2^{m-1-j} b_2 v_j$. Equality for all inputs and all $n \geq m$ means $c_2^\top F_2^k (\Phi x_1[m] - x_2[m]) = 0$ for all $k \geq 0$. By observability this holds if and only if $\Phi x_1[m] = x_2[m]$ for every input history, that is, if and only if $\Phi F_1^k b_1 = F_2^k b_2$ for $k = 0, \dots, m-1$. Since $m \geq S+1$, this gives $\Phi \mathcal{C}_1 = \mathcal{C}_2$, so Φ is invertible. It also gives $(\Phi F_1 - F_2 \Phi) F_1^k b_1 = \Phi F_1^{k+1} b_1 - F_2^{k+1} b_2 = 0$ for $k = 0, \dots, S-1$, hence $(\Phi F_1 - F_2 \Phi) \mathcal{C}_1 = 0$ and $F_2 = \Phi F_1 \Phi^{-1}$. Conversely, if $F_2 = \Phi F_1 \Phi^{-1}$ and $b_2 = \Phi b_1$, then $\Phi F_1^k b_1 = F_2^k b_2$ for all k .

(b) The B-type behaviour requires that the stored state continue as in Σ_1 : $c_2^\top F_2^k \Phi x = c_1^\top F_1^k x$ for all $k \geq 0$ and every reachable x . By controllability every x is reachable within $S \leq m-1$ samples, so $\mathcal{O}_2 \Phi = \mathcal{O}_1$. Then Φ is invertible, $c_2^\top = c_1^\top \Phi^{-1}$, and $\mathcal{O}_2 (F_2 \Phi - \Phi F_1) = 0$ follows in the same way, so $F_2 = \Phi F_1 \Phi^{-1}$. The converse is immediate. $\square$

APPENDIX B PROOF OF PROPOSITION 3

N has degree $K+1$. If $c_d = 0$, then $z = 0$ is a root of N ; it cancels the delay pole and lies inside the disc. We give the argument for $c_d \neq 0$; the case $c_d = 0$ is the same with the pole at 0 removed.

(i) All residues are positive, so $\hat{H}$ decreases from $+\infty$ to $-\infty$ between consecutive poles of $\{0, \theta_0, \dots, \theta_{K-1}\}$. This gives K roots in $(0, \max_k \theta_k)$. On $(\max_k \theta_k, \infty)$, $\hat{H}$ decreases

from $+\infty$ to $g_0 > 0$, so there is no root there. On $(-\infty, 0)$, $\hat{H}$ decreases from $g_0 > 0$ to $-\infty$, so there is exactly one root z_* . It lies in $(-1, 0)$ if and only if $\hat{H}(-1) > 0$.

(ii) Between consecutive θ_k the negative residues make $\hat{H}$ rise from $-\infty$ to $+\infty$, which gives $K-1$ roots. For $z > \max_k \theta_k$,

$$z\hat{H}(z) = g_0 z + c_d + \sum_k c_k (1 + \theta_k/(z - \theta_k))$$

is strictly increasing from $-\infty$ to $+\infty$. Hence there is exactly one root there, and it is smaller than 1 if and only if $\hat{H}(1) > 0$. If $c_d < 0$, then $z\hat{H}(z)$ rises from $c_d < 0$ at $z = 0$ to $+\infty$ at $\min_k \theta_k^-$, giving the last root in $(0, \min_k \theta_k)$. If $c_d > 0$, then $z\hat{H}(z)$ rises from $-\infty$ at $z \rightarrow -\infty$ to $c_d > 0$ at $z = 0$. Counting shows there is exactly one root $z_* < 0$, with $z\hat{H}(z) < 0$ for $z < z_*$. Hence $z_* > -1$ if and only if $-\hat{H}(-1) < 0$, that is, $\hat{H}(-1) > 0$. In all cases the $K+1$ roots are real, so no complex root can lie outside the disc.

(iii) Integral bank, order $-a$ with $0 < a < 1$. Since $\hat{g}_1 = c_d + \sum_k c_k$ and $\hat{g}_2 = \sum_k c_k \theta_k$,

$$\hat{H}(-1) = g_0 - \hat{g}_1 + \sum_k \frac{c_k \theta_k}{1 + \theta_k} \geq g_0 - \hat{g}_1 + \frac{1}{2} \hat{g}_2.$$

With $g_1 = a g_0$, $g_2 = \frac{1}{2} a(1+a) g_0$ and relative errors at most $\delta = \frac{1}{3}$, the right-hand side is at least $g_0(1-a)(6-a)/6 > 0$. Derivative bank, order a : here $\sum_k c_k \theta_k/(1+\theta_k) \geq \hat{g}_2$ because $c_k < 0$. Hence $\hat{H}(-1) \geq g_0 - \hat{g}_1 + \hat{g}_2$. With $g_1 = -a g_0$ and $g_2 = -\frac{1}{2} a(1-a) g_0$, this is at least $g_0(1 + \frac{2}{3} a^2) > 0$. $\square$

APPENDIX C PROOF OF THEOREM 1

(a) Row n of E_A is $(e_n(\alpha_n), \dots, e_1(\alpha_n), 0, \dots, 0)$. It contains a single order, so its absolute sum is at most ρ_{row} . Column j of E_A contains $e_{n-j}(\alpha_n)$ for $n > j$, one entry per lag, each at most $\sup_a |e_{n-j}(a)|$, so its absolute sum is at most ρ_{col} . In E_B column j contains the single order α_j , and row n contains one entry per lag. This gives the four bounds. The ℓ^2 bound follows from $\|E\|_2^2 \leq \|E\|_1 \|E\|_\infty$. For a finite $\mathcal{S}$, let a^* maximize $\sum_r |e_r(a)|$ and a_r maximize $|e_r(a)|$. The constant sequence a^* attains ρ_{row} in the last row of E_A and in the first column of E_B . The sequence $\alpha_n = a_n$ attains ρ_{col} in the first column of E_A , and the reversed sequence $\alpha_n = a_{N-1-n}$ attains it in the last row of E_B .

(b) The off-diagonal entries satisfy $|(E_T)_{n,j}| \leq \varepsilon_R |[W_T]_{n,j}|$ because $n-j < N \leq R$, and the diagonal of E_T vanishes. For any x , $|E_T x| \leq |E_T| |x| \leq \varepsilon_R |W_T| |x|$ entrywise, so $\|E_T x\|_p \leq \varepsilon_R \|W_T\|_p \|x\|_p$. For $p \in \{1, \infty\}$ the induced norm depends only on the absolute values of the entries.

(c) Since $\hat{W}_T = \hat{W}_F(-\alpha)^{-1}$ and $W_T = W_F(-\alpha)^{-1}$,

$$\hat{W}_T - W_T = \hat{W}_T (W_F(-\alpha) - \hat{W}_F(-\alpha)) W_T = -\hat{W}_T E_F^- W_T.$$

Hence $\|E_T\|_p \leq \|\hat{W}_T\|_p \|E_F^-\|_p \|W_T\|_p \leq (\|W_T\|_p + \|E_T\|_p) q$, which rearranges to the first bound. Writing $\|W_T\|_p \leq \|\hat{W}_T\|_p + \|E_T\|_p$ instead gives the second. If all orders are negative, $\hat{W}_F(-\alpha)$ is a derivative bank at every sample: its diagonal $T_s^{\alpha_n}$ is positive, and its off-diagonal entries $\hat{g}_r(-\alpha_n)$, $r \geq 1$, are nonpositive, for $r \geq 2$ because all

$c_k < 0$ and for $r = 1$ by assumption. (The DC floor changes $\hat{g}_1$ only by about the DC quadrature error; in the 200 discrete-time holdout designs, $\hat{g}_1 < 0$ at all 4294 checked derivative orders.) Write $\hat{W}_F(-\alpha) = \Delta - L$ with Δ diagonal positive and $L \geq 0$ strictly lower triangular. Then $\hat{W}_T = \sum_{k=0}^{N-1} (\Delta^{-1} L)^k \Delta^{-1} \geq 0$, and for a nonnegative matrix $\|M\|_\infty = \|M\mathbf{1}\|_\infty$. $\square$

APPENDIX D

PROOF OF THEOREM 3 AND LEMMA 2

Part (a) is stated after the theorem. For (b), fix a and r , and write $f = f_{a,r}$ and $I = \int f dx = k_a(r)/\sigma_a$. The realized weight is σ_a times the infinite trapezoidal sum $T_h = h \sum_{j \in \mathbb{Z}} f(x_j)$, $x_j = \ln u_{10} + jh$, minus two residuals. Let $u_j = e^{x_j}$.

Quadrature. By (H1) and [43, Thm. 5.1], $|T_h - I| \leq 2M/(e^{2\pi d/h} - 1)$ with $M = \sup_{|y| < d} \int |f(x + iy)| dx \leq L_d I$.

Lower bound on I . For $r \geq 2$, (H2) gives $I \geq c_- \int_0^{u_*} e^{-(r-1)u} u^{\beta_a-1} du \geq c_- \vartheta (r-1)^{-\beta_a}$.

Lower tail. The nodes $j < 0$ are replaced by one node at $u_0 = u_{10}$ with the same total weight. At lag r the residual is $\sum_{j < 0} h u_j m_a(u_j) (e^{-(r-1)u_j} - e^{-(r-1)u_0})$, which lies between 0 and $(r-1)u_0 \sum_{j < 0} h u_j m_a(u_j)$. By (H2) this is at most $(r-1)c_+ u_{10}^{1+\beta_a} \sum_{j \geq 1} h e^{-j\beta_a h} \leq (r-1)c_+ u_{10}^{1+\beta_a} / \beta_a$. Divided by the lower bound on I , it gives the second term of (10). It vanishes at $r = 1$.

Upper tail. The nodes $j \geq K$ are replaced by the delay mode, which is exact at $r = 1$. For $r \geq 2$ the residual is $\sum_{j \geq K} h u_j m_a(u_j) e^{-(r-1)u_j} \leq C_\infty e^{-(r-2)u_{hi}} \sum_{j \geq K} h u_j e^{-(1+\gamma)u_j}$ by (H3). The function $x \mapsto e^x e^{-(1+\gamma)e^x}$ decreases for $e^x \geq 1/(1+\gamma)$, so for $u_{hi} \geq 1$ the sum is at most $\int_{u_{hi}}^\infty e^{-(1+\gamma)u} du = e^{-(1+\gamma)u_{hi}} / (1+\gamma)$. Relative to I , this leaves the factor $(r-1)^{\beta_a} e^{-(r-2)u_{hi}}$. That factor is 1 at $r = 2$ and does not increase for $u_{hi} \geq \beta_+ \ln 2$, which gives the third term.

For (c), the choices of h , u_{10} and u_{hi} make the three terms at most $\varepsilon/2$, $\varepsilon/4$ and $\varepsilon/4$; the second uses $(R-1)u_{10} \leq 1$, so that the exponent $1 + \beta_a$ may be replaced by $1 + \beta_-$. A grid with $K = \lceil \ln(u_{hi}/u_{10})/h \rceil + 1$ nodes has a spacing at most h , and none of the three bounds increases when the spacing decreases. Finally, $1/h = O(\ln(1/\varepsilon))$ and $\ln(u_{hi}/u_{10}) = O(\ln R + \ln(1/\varepsilon))$, which gives the scaling of part (c). $\square$

Proof of Lemma 2. With $u = e^x$, $c = \cos y$ and $z = u e^{iy}$,

$$|f_{a,r}(x + iy)| = u e^{-(r-a)cu} |1 - e^{-z}|^a,$$

$$\int_{\mathbb{R}} |f_{a,r}(x + iy)| dx = \int_0^\infty e^{-(r-a)cu} |1 - e^{-z}|^a du,$$

and $I = \int_0^\infty e^{-(r-a)u} (1 - e^{-u})^a du$. For $\operatorname{Re} z > 0$, $1 - e^{-z}$ lies in the disc $|w - 1| < 1$, so $f_{a,r}$ is analytic in the strip. Two bounds hold for $|y| < \pi/2$:

- $|1 - e^{-z}| \leq \min(u, 2) \leq (1 - e^{-u})/\kappa_0$ with $\kappa_0 = (1 - e^{-2})/2$, because $(1 - e^{-u})/\min(u, 2)$ is smallest at $u = 2$;
- $|1 - e^{-z}| \geq 1 - e^{-cu} \geq c(1 - e^{-u})$, by concavity of $1 - e^{-u}$.

Hence $|1 - e^{-z}|^a \leq \kappa_0^{-a} (1 - e^{-u})^a$ for $a \geq 0$ and $\leq c^a (1 - e^{-u})^a$ for $a < 0$. Substituting $v = cu$ and using

$1 - e^{-v} \leq 1 - e^{-v/c} \leq (1 - e^{-v})/c$ gives $\int_0^\infty e^{-(r-a)cu} (1 - e^{-u})^a du \leq c^{-1-\max(a,0)} I$. The ratio in (H1) is therefore at most $\kappa_0^{-a} c^{-1-a}$ for $a \geq 0$ and $c^{-1-|a|}$ for $a < 0$, for every r , which gives the bound on L_d . The same bounds show that $|f_{a,r}|$ vanishes at both ends of the strip, since $1 + a > 0$ and $r - a > 0$. For (H2), $e^{-(1-a)u} \in [e^{-2}, 1]$ and $(1 - e^{-u})/u \in [1 - e^{-1}, 1]$ on $(0, 1]$. For (H3), $(1 - e^{-u})^a \leq (1 - e^{-1})^{-1}$ and $e^{-(1-a)u} \leq e^{-(1-\bar{a})u}$ on $[1, \infty)$. $\square$

REFERENCES

- [1] S. G. Samko and B. Ross, "Integration and differentiation to a variable fractional order," *Integral Transforms and Special Functions*, vol. 1, no. 4, pp. 277–300, 1993.
- [2] C. F. Lorenzo and T. T. Hartley, "Variable order and distributed order fractional operators," *Nonlinear Dynamics*, vol. 29, pp. 57–98, 2002.
- [3] H. Sun, A. Chang, Y. Zhang, and W. Chen, "A review on variable-order fractional differential equations: mathematical foundations, physical models, numerical methods and applications," *Fractional Calculus and Applied Analysis*, vol. 22, no. 1, pp. 27–59, 2019.
- [4] S. Patnaik, J. P. Holkamp, and F. Semperlotti, "Applications of variable-order fractional operators: a review," *Proceedings of the Royal Society A*, vol. 476, no. 2234, p. 20190498, 2020.
- [5] D. Valério and J. Sá da Costa, "Variable-order fractional derivatives and their numerical approximations," *Signal Processing*, vol. 91, no. 3, pp. 470–483, 2011.
- [6] R. Garrappa, A. Giusti, and F. Mainardi, "Variable-order fractional calculus: a change of perspective," *Communications in Nonlinear Science and Numerical Simulation*, vol. 102, p. 105904, 2021.
- [7] D. Sierociuk, W. Malesza, and M. Macias, "Derivation, interpretation, and analog modelling of fractional variable order derivative definition," *Applied Mathematical Modelling*, vol. 39, no. 13, pp. 3876–3888, 2015.
- [8] —, "On the recursive fractional variable-order derivative: equivalent switching strategy, duality, and analog modeling," *Circuits, Systems, and Signal Processing*, vol. 34, no. 4, pp. 1077–1113, 2015.
- [9] W. Malesza and D. Sierociuk, "Recursive variable type and order difference, its definition and basic properties," in *Proceedings of the 17th International Carpathian Control Conference (ICCC)*, 2016, pp. 473–478.
- [10] D. Sierociuk, M. Macias, W. Malesza, and M. S. Wiraszka, "Analog realization of a fractional recursive variable-type and order operator for a particular switching strategy," *Electronics*, vol. 9, no. 5, p. 855, 2020.
- [11] A. Oustaloup, F. Levron, B. Mathieu, and F. M. Nanot, "Frequency-band complex noninteger differentiator: characterization and synthesis," *IEEE Transactions on Circuits and Systems I: Fundamental Theory and Applications*, vol. 47, no. 1, pp. 25–39, 2000.
- [12] A. Charef, H. H. Sun, Y. Y. Tsao, and B. Onaral, "Fractal system as represented by singularity function," *IEEE Transactions on Automatic Control*, vol. 37, no. 9, pp. 1465–1470, 1992.
- [13] B. M. Vinagre, I. Podlubny, A. Hernández, and V. Feliu, "Some approximations of fractional order operators used in control theory and applications," *Fractional Calculus and Applied Analysis*, vol. 3, no. 3, pp. 231–248, 2000.
- [14] Y. Wei, P. W. Tse, B. Du, and Y. Wang, "An innovative fixed-pole numerical approximation for fractional order systems," *ISA Transactions*, vol. 62, pp. 94–102, 2016.
- [15] Y. Wei, J. Wang, T. Liu, and Y. Wang, "Fixed pole based modeling and simulation schemes for fractional order systems," *ISA Transactions*, vol. 84, pp. 43–54, 2019.
- [16] Y. Wei, H. Zhang, Y. Hou, and K. Cheng, "Multiple fixed pole-based rational approximation for fractional order systems," *Journal of Dynamic Systems, Measurement, and Control*, vol. 143, no. 6, p. 061008, 2021.
- [17] G. Montseny, "Diffusive representation of pseudo-differential time-operators," *ESAIM: Proceedings*, vol. 5, pp. 159–175, 1998.
- [18] J. C. Trigeassou, N. Maamri, J. Sabatier, and A. Oustaloup, "State variables and transients of fractional order differential systems," *Computers & Mathematics with Applications*, vol. 64, no. 10, pp. 3117–3140, 2012.
- [19] D. Baffet and J. S. Hesthaven, "A kernel compression scheme for fractional differential equations," *SIAM Journal on Numerical Analysis*, vol. 55, no. 2, pp. 496–520, 2017.
- [20] S. Jiang, J. Zhang, Q. Zhang, and Z. Zhang, "Fast evaluation of the Caputo fractional derivative and its applications to fractional diffusion equations," *Communications in Computational Physics*, vol. 21, no. 3, pp. 650–678, 2017.

- [21] K. Diethelm, "Diffusive representations for the numerical evaluation of fractional integrals," in *Proceedings of the International Conference on Fractional Differentiation and its Applications (ICFDA)*, 2023, arXiv:2301.11931.
- [22] M. Macias, D. Sierociuk, and W. Malesza, "Realization of the fractional variable-order model with symmetric property," in *Advances in Non-Integer Order Calculus and Its Applications*, ser. Lecture Notes in Electrical Engineering. Cham: Springer, 2020, pp. 43–54.
- [23] C. Zhou, Z. Li, and F. Xie, "Coexisting attractors, crisis route to chaos in a novel 4D fractional-order system and variable-order circuit implementation," *The European Physical Journal Plus*, vol. 134, no. 2, p. 73, 2019.
- [24] M. F. Tolba, H. Saleh, B. Mohammad, M. Al-Qutayri, A. S. Elwakil, and A. G. Radwan, "Enhanced FPGA realization of the fractional-order derivative and application to a variable-order chaotic system," *Nonlinear Dynamics*, vol. 99, no. 4, pp. 3143–3154, 2020.
- [25] P. Oziabło, D. Mozyrska, and M. Wyrwas, "Discrete-time fractional, variable-order PID controller for a plant with delay," *Entropy*, vol. 22, no. 7, p. 771, 2020.
- [26] J.-L. Zhang, Z.-W. Fang, and H.-W. Sun, "Exponential-sum-approximation technique for variable-order time-fractional diffusion equations," *Journal of Applied Mathematics and Computing*, vol. 68, no. 1, pp. 323–347, 2022.
- [27] —, "Fast second-order evaluation for variable-order Caputo fractional derivative with applications to fractional sub-diffusion equations," *Numerical Mathematics: Theory, Methods and Applications*, vol. 15, no. 1, pp. 200–226, 2022.
- [28] Y. Huang, Q. Li, R. Li, F. Zeng, and L. Guo, "A unified fast memory-saving time-stepping method for fractional operators and its applications," *Numerical Mathematics: Theory, Methods and Applications*, vol. 15, no. 3, pp. 679–714, 2022.
- [29] L. H. Zetterberg and Q. Zhang, "Elimination of transients in adaptive filters with application to speech coding," *Signal Processing*, vol. 15, no. 4, pp. 419–428, 1988.
- [30] V. Välimäki and T. I. Laakso, "Suppression of transients in variable recursive digital filters with a novel and efficient cancellation method," *IEEE Transactions on Signal Processing*, vol. 46, no. 12, pp. 3408–3414, 1998.
- [31] D. Sierociuk, M. Macias, and W. Malesza, "Analog realization of fractional variable-type and -order iterative operator," *Applied Mathematics and Computation*, vol. 336, pp. 138–147, 2018.
- [32] B. Arıcıoğlu, "Circuit design and implementation of a time-varying fractional-order chaotic system," *Axioms*, vol. 14, no. 4, p. 310, 2025.
- [33] G. Tsirimokou, C. Psychalinos, and A. S. Elwakil, "Fractional-order electronically controlled generalized filters," *International Journal of Circuit Theory and Applications*, vol. 45, no. 5, pp. 595–612, 2017.
- [34] A. Charef and D. Idiou, "Design of analog variable fractional order differentiator and integrator," *Nonlinear Dynamics*, vol. 69, no. 4, pp. 1577–1588, 2012.
- [35] C.-C. Tseng, "Design of variable and adaptive fractional order FIR differentiators," *Signal Processing*, vol. 86, no. 10, pp. 2554–2566, 2006.
- [36] A. Charef and T. Bensouici, "Design of digital FIR variable fractional order integrator and differentiator," *Signal, Image and Video Processing*, vol. 6, no. 4, pp. 679–689, 2012.
- [37] B. Yu, Y. Pu, Q. He, and X. Yuan, "Circuit implementation of variable-order scaling fractal-ladder fractor with high resolution," *Fractal and Fractional*, vol. 6, no. 7, p. 388, 2022.
- [38] J. Jia, H. Wang, and X. Zheng, "Numerical analysis of a fast finite element method for a hidden-memory variable-order time-fractional diffusion equation," *Journal of Scientific Computing*, vol. 91, no. 2, p. 54, 2022.
- [39] D. Sierociuk, M. Macias, W. Malesza, and G. Sarwas, "Dual estimation of fractional variable order based on the unscented fractional order Kalman filter for direct and networked measurements," *Circuits, Systems, and Signal Processing*, vol. 35, no. 6, pp. 2055–2082, 2016.
- [40] D. V. Widder, *The Laplace Transform*, ser. Princeton Mathematical Series. Princeton: Princeton University Press, 1941, vol. 6, crossref lists the digital edition with issue date 1942.
- [41] F. Sabzikar, M. M. Meerschaert, and J. Chen, "Tempered fractional calculus," *Journal of Computational Physics*, vol. 293, pp. 14–28, 2015.
- [42] F. Mainardi and R. Garrappa, "On complete monotonicity of the Prabhakar function and non-Debye relaxation in dielectrics," *Journal of Computational Physics*, vol. 293, pp. 70–80, 2015.
- [43] L. N. Trefethen and J. A. C. Weideman, "The exponentially convergent trapezoidal rule," *SIAM Review*, vol. 56, no. 3, pp. 385–458, 2014.
- [44] C. J. Clopper and E. S. Pearson, "The use of confidence or fiducial limits illustrated in the case of the binomial," *Biometrika*, vol. 26, no. 4, pp. 404–413, 1934.
- [45] P. Tichavský, C. H. Muravchik, and A. Nehorai, "Posterior Cramér–Rao bounds for discrete-time nonlinear filtering," *IEEE Transactions on Signal Processing*, vol. 46, no. 5, pp. 1386–1396, 1998.
- [46] C. Zou, L. Zhang, X. Hu, Z. Wang, T. Wik, and M. Pecht, "A review of fractional-order techniques applied to lithium-ion batteries, lead-acid batteries, and supercapacitors," *Journal of Power Sources*, vol. 390, pp. 286–296, 2018.
- [47] X. Lu, H. Li, J. Xu, S. Chen, and N. Chen, "Rapid estimation method for state of charge of lithium-ion battery based on fractional continual variable order model," *Energies*, vol. 11, no. 4, p. 714, 2018.
- [48] D. Wang, H. Wei, J. Xue, F. Wu, and A. M. Lopes, "Variable fractional-order equivalent circuit model for lithium-ion battery via chaotic adaptive fractional particle swarm optimization method," *Symmetry*, vol. 14, no. 11, p. 2407, 2022.
- [49] S. Mao, Z. Yu, Z. Zhang, B. Lv, Z. Sun, R. Huai, L. Chang, and H. Li, "Parameter identification method for the variable order fractional-order equivalent model of lithium-ion battery," *Journal of Energy Storage*, vol. 57, p. 106273, 2023.
- [50] P. Kollmeyer, "Panasonic 18650PF Li-ion battery data," Mendeley Data, version 1, 2018, licence CC BY 4.0.
- [51] S. C. Lim, "Fractional Brownian motion and multifractional Brownian motion of Riemann–Liouville type," *Journal of Physics A: Mathematical and General*, vol. 34, no. 7, pp. 1301–1310, 2001.
- [52] S. V. Muniandy and S. C. Lim, "Modeling of locally self-similar processes using multifractional Brownian motion of Riemann–Liouville type," *Physical Review E*, vol. 63, no. 4, p. 046104, 2001.
- [53] W. Wang, M. Balcerak, K. Burnecki, A. V. Chechkin, S. Janušonis, J. Ślęzak, T. Vojta, A. Wyłomańska, and R. Metzler, "Memory-multifractional Brownian motion with continuous correlations," *Physical Review Research*, vol. 5, p. L032025, 2023.
- [54] T. Kailath, *Linear Systems*. Englewood Cliffs, NJ: Prentice-Hall, 1980.