KB-C5 | C向五层铜梳排

BREP-derived orthographic projections | First-angle orientation | Not for manufacture

FEATURE / DIMENSION SCHEDULE | 特征尺寸表

01 5-layer C negative-X copper comb; 6 x 8 spine section
02 Finger indices i=0,2,4; active height 25.75 mm; layer pitch 6.35
03 Finger blank 34 x 8 x 2; through-hole Ø4.5 along Z at X=-90
04 2 x M4x0.7 tapped cross-holes, core Ø3.3, through the 6 mm spine along X at Z=1 and H-3

MATERIAL / 材料

Copper, grade TBD; current rating not established

TOLERANCES / 公差

Unspecified unless individually stated; confirm before release.

Copper grade TBD; allowable current rating not established; beam cross-section preliminary

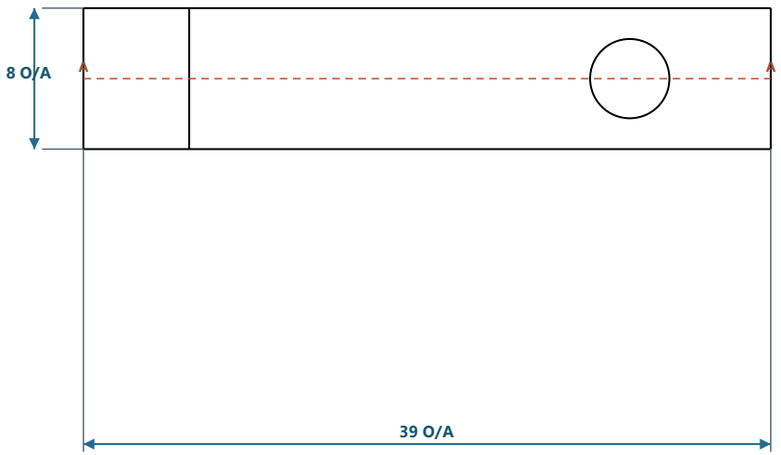

PLAN / FRONT (3.2:1)



SECTION A-A / 剖视 (Y=0, Z=12.875)

SIDE / 侧视 (1.6:1)



ISOMETRIC / 轴测 (1.2:1)

Copper grade/current rating unconfirmed; finger beam section is preliminary. No current capacity assigned.

ASSEMBLY	PART / DRAWING	SCALE / 比例	STATUS
Compact plate-press cell	KB-C5 / DWG-KB-C5	See each view; dimensions govern	REVIEW