REVIEW DRAFT

FIDO UAF Authenticator-Specific Module API

FIDO Alliance Review Draft 09 July 2016

This version:
https://fidoalliance.org/specs/fido-uaf-v1.1-rd-20160709/fido-uaf-asm-api-v1.1-rd-20160709.html
Previous version:
https://fidoalliance.org/specs/fido-uaf-v1.0-ps-20141208/fido-uaf-asm-api-v1.0-ps-20141208.html
Editors:
Dr. Rolf Lindemann, Nok Nok Labs, Inc.
John Kemp, FIDO Alliance
Contributors:
Davit Baghdasaryan, Nok Nok Labs, Inc.
Brad Hill, PayPal, Inc.
Roni Sasson, Discretix, Inc.
Jeff Hodges, PayPal, Inc.
Ka Yang, Nok Nok Labs, Inc.

Abstract

UAF authenticators may be connected to a user device via various physical interfaces (SPI, USB, Bluetooth, etc). The UAF Authenticator-Specific Module (ASM) is a software interface on top of UAF authenticators which gives a standardized way for FIDO UAF Clients to detect and access the functionality of UAF authenticators and hides internal communication complexity from FIDO UAF Client.

This document describes the internal functionality of ASMs, defines the UAF ASM API and explains how FIDO UAF Clients should use the API.

This document's intended audience is FIDO authenticator and FIDO FIDO UAF Client vendors.

Status of This Document

This section describes the status of this document at the time of its publication. Other documents may supersede this document. A list of current FIDO Alliance publications and the latest revision of this technical report can be found in the FIDO Alliance specifications index at https://www.fidoalliance.org/specifications/.

This document was published by the FIDO Alliance as a Review Draft. This document is intended to become a FIDO Alliance Proposed Standard. If you wish to make comments regarding this document, please Contact Us. All comments are welcome.

This is a Review Draft Specification and is not intended to be a basis for any implementations as the Specification may change. Permission is hereby granted to use the Specification solely for the purpose of reviewing the Specification. No rights are granted to prepare derivative works of this Specification. Entities seeking permission to reproduce portions of this Specification for other uses must contact the FIDO Alliance to determine whether an appropriate license for such use is available.

Implementation of certain elements of this Specification may require licenses under third party intellectual property rights, including without limitation, patent rights. The FIDO Alliance, Inc. and its Members and any other contributors to the Specification are not, and shall not be held, responsible in any manner for identifying or failing to identify any or all such third party intellectual property rights.

THIS FIDO ALLIANCE SPECIFICATION IS PROVIDED “AS IS” AND WITHOUT ANY WARRANTY OF ANY KIND, INCLUDING, WITHOUT LIMITATION, ANY EXPRESS OR IMPLIED WARRANTY OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Table of Contents

1. Notation

Type names, attribute names and element names are written as`code`.

String literals are enclosed in “”, e.g. “UAF-TLV”.

In formulas we use “|” to denote byte wise concatenation operations.

DOM APIs are described using the ECMAScript [ECMA-262] bindings for WebIDL [WebIDL-ED].

The notation base64url refers to "Base 64 Encoding with URL and Filename Safe Alphabet" [RFC4648] *without padding*.

Following [WebIDL-ED], dictionary members are optional unless they are explicitly marked as `required`.

WebIDL dictionary members must not have a value of null.

Unless otherwise specified, if a WebIDL dictionary member is DOMString, it must not be empty.

Unless otherwise specified, if a WebIDL dictionary member is a List, it must not be an empty list.

UAF specific terminology used in this document is defined in [FIDOGlossary].

All diagrams, examples, notes in this specification are non-normative.

> NOTE
>
> Note: Certain dictionary members need to be present in order to comply with FIDO requirements. Such members are marked in the WebIDL definitions found in this document, as `required`. The keyword `required` has been introduced by [WebIDL-ED], which is a work-in-progress. If you are using a WebIDL parser which implements [WebIDL], then you may remove the keyword `required` from your WebIDL and use other means to ensure those fields are present.

1.1 Key Words

The key words “must”, “must not”, “required”, “shall”, “shall not”, “should”, “should not”, “recommended”, “may”, and “optional” in this document are to be interpreted as described in [RFC2119].

2. Overview

This section is non-normative.

UAF authenticators may be connected to a user device via various physical interfaces (SPI, USB, Bluetooth, etc). The UAF Authenticator-Specific

module (ASM) is a software interface on top of UAF authenticators which gives a standardized way for FIDO UAF Clients to detect and access the functionality of UAF authenticators, and hides internal communication complexity from clients.

The ASM is a platform-specific software component offering an API to FIDO UAF Clients, enabling them to discover and communicate with one or more available authenticators.

A single ASM may report on behalf of multiple authenticators.

The intended audience for this document is FIDO UAF authenticator and FIDO UAF Client vendors.

> NOTE
>
> Platform vendors might choose to not expose the ASM API defined in this document to applications. They might instead choose to expose ASM functionality through some other API (such as, for example, the Android KeyStore API, or iOS KeyChain API). In these cases it's important to make sure that the underlying ASM communicates with the FIDO UAF authenticator in a manner defined in this document.

The FIDO UAF protocol and its various operations is described in the FIDO UAF Protocol Specification [UAFProtocol]. The following simplified architecture diagram illustrates the interactions and actors this document is concerned with:

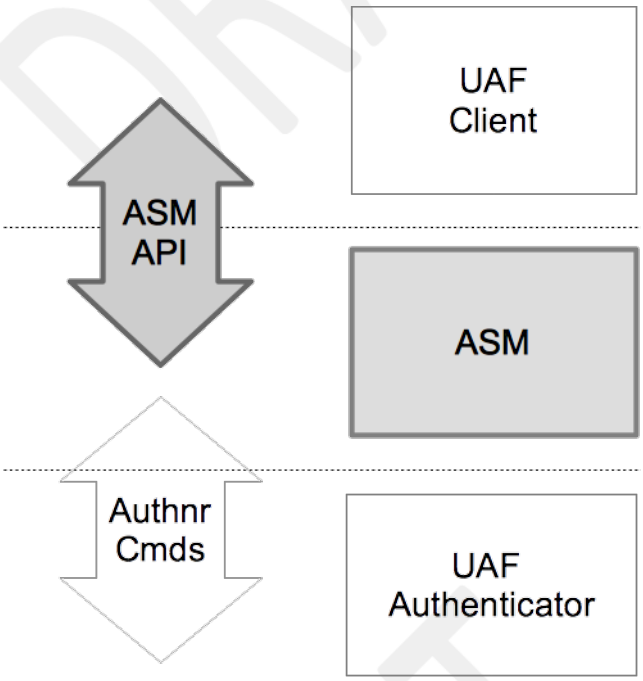

Fig. 1 UAF ASM API Architecture

2.1 Code Example format

ASM requests and responses are presented in WebIDL format.

3. ASM Requests and Responses

This section is normative.

The ASM API is defined in terms of JSON-formatted [ECMA-404] request and reply messages. In order to send a request to an ASM, a FIDO UAF Client creates an appropriate object (e.g., in ECMAscript), "stringifies" it (also known as serialization) into a JSON-formated string, and sends it to the ASM. The ASM de-serializes the JSON-formatted string, processes the request, constructs a response, stringifies it, returning it as a JSON-formatted string.

> NOTE
>
> The ASM request processing rules in this document explicitly assume that the underlying authenticator implements the "UAFV1TLV" assertion scheme (e.g. references to TLVs and tags) as described in [UAFProtocol]. If an authenticator supports a different assertion scheme then the corresponding processing rules must be replaced with appropriate assertion scheme-specific rules.

Authenticator implementers may create custom authenticator command interfaces other than the one defined in [UAFAuthnrCommands]. Such implementations are not required to implement the exact message-specific processing steps described in this section. However,

1. the command interfaces must present the ASM with external behavior equivalent to that described below in order for the ASM to properly respond to the client request messages (e.g. returning appropriate UAF status codes for specific conditions).
2. all authenticator implementations must support an assertion scheme as defined [UAFRegistry] and must return the related objects, i.e. `TAG_UAFV1_REG_ASSERTION` and `TAG_UAFV1_AUTH_ASSERTION` as defined in [UAFAuthnrCommands].

3.1 Request enum

WebIDL

```
enum Request {
    "GetInfo",
    "Register",
    "Authenticate",
    "Deregister",
    "GetRegistrations",
    "OpenSettings"
};
```

Enumeration description	
GetInfo	GetInfo
Register	Register
Authenticate	Authenticate
Deregister	Deregister
GetRegistrations	GetRegistrations
OpenSettings	OpenSettings

3.2 StatusCode Interface

If the ASM needs to return an error received from the authenticator, it shall map the status code received from the authenticator to the appropriate ASM status code as specified here.

If the ASM doesn't understand the authenticator's status code, it shall treat it as `UAF_CMD_STATUS_ERR_UNKNOWN` and map it to `UAF_ASM_STATUS_ERROR` if it cannot be handled otherwise.

If the caller of the ASM interface (i.e. the FIDO Client) doesn't understand a status code returned by the ASM, it shall treat it as `UAF_ASM_STATUS_ERROR`. This might occur when new error codes are introduced.

WebIDL

```
interface StatusCode {
    const short UAF_ASM_STATUS_OK = 0x00;
    const short UAF_ASM_STATUS_ERROR = 0x01;
    const short UAF_ASM_STATUS_ACCESS_DENIED = 0x02;
    const short UAF_ASM_STATUS_USER_CANCELLED = 0x03;
    const short UAF_ASM_STATUS_CANNOT_RENDER_TRANSACTION_CONTENT = 0x04;
    const short UAF_ASM_STATUS_KEY_DISAPPEARED_PERMANENTLY = 0x09;
    const short UAF_ASM_STATUS_AUTHENTICATOR_DISCONNECTED = 0x0b;
    const short UAF_ASM_STATUS_USER_NOT_RESPONSIVE = 0x0e;
    const short UAF_ASM_STATUS_INSUFFICIENT_AUTHENTICATOR_RESOURCES = 0x0f;
    const short UAF_ASM_STATUS_USER_LOCKOUT = 0x10;
    const short UAF_ASM_STATUS_USER_NOT_ENROLLED = 0x11;
};
```

3.2.1 Constants

`UAF_ASM_STATUS_OK` of type short
: No error condition encountered.

`UAF_ASM_STATUS_ERROR` of type short
: An unknown error has been encountered during the processing.

`UAF_ASM_STATUS_ACCESS_DENIED` of type short
: Access to this request is denied.

`UAF_ASM_STATUS_USER_CANCELLED` of type short
: Indicates that user explicitly canceled the request.

`UAF_ASM_STATUS_CANNOT_RENDER_TRANSACTION_CONTENT` of type short
: Transaction content cannot be rendered, e.g. format doesn't fit authenticator's need.

`UAF_ASM_STATUS_KEY_DISAPPEARED_PERMANENTLY` of type short
: Indicates that the UAuth key disappeared from the authenticator and canot be restored.

`UAF_ASM_STATUS_AUTHENTICATOR_DISCONNECTED` of type short
: Indicates that the authenticator is no longer connected to the ASM.

`UAF_ASM_STATUS_USER_NOT_RESPONSIVE` of type short
: The user took too long to follow an instruction, e.g. didn't swipe the finger within the accepted time.

`UAF_ASM_STATUS_INSUFFICIENT_AUTHENTICATOR_RESOURCES` of type short
: Insufficient resources in the authenticator to perform the requested task.

`UAF_ASM_STATUS_USER_LOCKOUT` of type short
: The operation failed because the user is locked out and the authenticator cannot automatically trigger an action to change that. Typically the user would have to enter an alternative password (formally: undergo some other alternative user verification method) to re-enable the use of the main user verification method.

> NOTE
>
> Any method the user can use to (re-) enable the main user verification method is considered an alternative user verification method and must be properly declared as such. For example, if the user can enter an alternative password to re-enable the use of fingerprints or to add additional fingers, the authenticator obviously supports fingerprint *or* password based user verification.

`UAF_ASM_STATUS_USER_NOT_ENROLLED` of type short
: The operation failed because the user is not enrolled to the authenticator and the authenticator cannot automatically trigger user enrollment.

3.2.2 Mapping Authenticator Status Codes to ASM Status Codes

Authenticators are returning a status code in their responses to the ASM. The ASM needs to act on those responses and also map the status code returned by the authenticator to an ASM status code.

The mapping of authenticator status codes to ASM status codes is specified here:

Authenticator Status Code	ASM Status Code	Comment
`UAF_CMD_STATUS_OK`	`UAF_ASM_STATUS_OK`	Pass-through success status.
`UAF_CMD_STATUS_ERR_UNKNOWN`	`UAF_ASM_STATUS_ERROR`	Pass-through unspecific error sta
`UAF_CMD_STATUS_ACCESS_DENIED`	`UAF_ASM_STATUS_ACCESS_DENIED`	Pass-through status code.

Authenticator Status Code	ASM Status Code	Comment
UAF_CMD_STATUS_USER_NOT_ENROLLED	UAF_ASM_STATUS_USER_NOT_ENROLLED (or UAF_ASM_STATUS_ACCESS_DENIED in some situations)	According to [UAF AuthnCommand] might occur at the *Sign* command or *Register* command if the authenticator automatically trigger user enrollment. The mapping depends on the command. In the case of "Register" command, it is mapped to UAF_ASM_STATUS_USER_NOT_ENROLLED in order to tell the calling FIDO Client that there is an authenticator present but the user enrollment needs to be triggered on the authenticator. In the case of the "Sign" command, the key needs to be protected by one of the authenticator's user verification methods. So if this error occurs it is considered an internal error and hence mapped to UAF_ASM_STATUS_ACCESS_DENIED.
UAF_CMD_STATUS_CANNOT_RENDER_TRANSACTION_CONTENT	UAF_ASM_STATUS_CANNOT_RENDER_TRANSACTION_CONTENT	Pass-through status code as it indicates a problem to be resolved by the end user: the transaction text.
UAF_CMD_STATUS_USER_CANCELLED	UAF_ASM_STATUS_USER_CANCELLED	Map to UAF_ASM_STATUS_USER_CANCELLED
UAF_CMD_STATUS_CMD_NOT_SUPPORTED	UAF_ASM_STATUS_OK or UAF_ASM_STATUS_ERROR	If the ASM is able to handle that command on behalf of the authenticator (e.g. re-wrapping the key handle in the case of *Dereg* command for a bound authenticator), the UAF_ASM_STATUS_OK must be returned. Map the status to UAF_ASM_STATUS_ERROR otherwise.
UAF_CMD_STATUS_ATTESTATION_NOT_SUPPORTED	UAF_ASM_STATUS_ERROR	Indicates an ASM issue as the ASM obviously not requested one of the attestation types indicated in the authenticator response to the *GetInfo* command.
UAF_CMD_STATUS_PARAMS_INVALID	UAF_ASM_STATUS_ERROR	Indicates an ASM issue as the ASM obviously not provided the correct parameters to the authenticator when sending the command.
UAF_CMD_STATUS_KEY_DISAPPEARED_PERMANENTLY	UAF_ASM_STATUS_KEY_DISAPPEARED_PERMANENTLY	Pass-through status code. It indicates that the Uauth key disappeared permanently. The RP App might want to trigger re-registration with the authenticator.
UAF_STATUS_CMD_TIMEOUT	UAF_ASM_STATUS_ERROR	Retry operation and map to UAF_ASM_STATUS_ERROR if the problem persists.
UAF_CMD_STATUS_USER_NOT_RESPONSIVE	UAF_ASM_STATUS_USER_NOT_RESPONSIVE	Pass-through status code. The RP App might want to retry the operation once the user has given attention to the application again.
UAF_CMD_STATUS_INSUFFICIENT_RESOURCES	UAF_ASM_STATUS_INSUFFICIENT_AUTHENTICATOR_RESOURCES	Pass-through status code.
UAF_CMD_STATUS_USER_LOCKOUT	UAF_ASM_STATUS_USER_LOCKOUT	Pass-through status code.
Any other status code	UAF_ASM_STATUS_ERROR	Map any unknown error code to UAF_ASM_STATUS_ERROR. This might happen if an ASM communicates with an authenticator implementing a newer UAF specification than the ASM.

3.3 ASMRequest Dictionary

All ASM requests are represented as `ASMRequest` objects.

WebIDL

```
dictionary ASMRequest {
    required Request requestType;
    Version          asmVersion;
    unsigned short   authenticatorIndex;
    object           args;
    Extension[]      exts;
};
```

3.3.1 Dictionary `ASMRequest` Members

`requestType` of type required Request
: Request type

`asmVersion` of type Version
: ASM message version to be used with this request. For the definition of the `Version` dictionary see [UAFProtocol]. The **asmVersion** must be 1.1 (i.e. major version is 1 and minor version is 1) for this version of the specification.

`authenticatorIndex` of type unsigned short
: Refer to the `GetInfo` request for more details. Field `authenticatorIndex` must not be set for `GetInfo` request.

`args` of type object
: Request-specific arguments. If set, this attribute may take one of the following types:

- `RegisterIn`

- `AuthenticateIn`
- `DeregisterIn`

`exts` of type array of Extension
: List of UAF extensions. For the definition of the `Extension` dictionary see [UAFProtocol].

3.4 ASMResponse Dictionary

All ASM responses are represented as `ASMResponse` objects.

WebIDL

```
dictionary ASMResponse {
    required short statusCode;
    object         responseData;
    Extension[]    exts;
};
```

3.4.1 Dictionary `ASMResponse` Members

`statusCode` of type required short
: must contain one of the values defined in the `StatusCode` interface

`responseData` of type object
: Request-specific response data. This attribute must have one of the following types:

- `GetInfoOut`
- `RegisterOut`
- `AuthenticateOut`
- `GetRegistrationOut`

`exts` of type array of Extension
: List of UAF extensions. For the definition of the `Extension` dictionary see [UAFProtocol].

3.5 GetInfo Request

Return information about available authenticators.

1. Enumerate all of the authenticators this ASM supports
2. Collect information about all of them
3. Assign indices to them (`authenticatorIndex`)
4. Return the information to the caller

> NOTE
>
> Where possible, an `authenticatorIndex` should be a persistent identifier that uniquely identifies an authenticator over time, even if it is repeatedly disconnected and reconnected. This avoids possible confusion if the set of available authenticators changes between a `GetInfo` request and subsequent ASM requests, and allows a FIDO client to perform caching of information about removable authenticators for a better user experience.

> NOTE
>
> It is up to the ASM to decide whether authenticators which are disconnected temporarily will be reported or not. However, if disconnected authenticators are reported, the FIDO Client might trigger an operation via the ASM on those. The ASM will have to notify the user to connect the authenticator and report an appropriate error if the authenticator isn't connected in time.

For a GetInfo request, the following `ASMRequest` member(s) must have the following value(s). The remaining `ASMRequest` members should be omitted:

- `ASMRequest.requestType` must be set to `GetInfo`

For a GetInfo response, the following `ASMResponse` member(s) must have the following value(s). The remaining `ASMResponse` members should be omitted:

- `ASMResponse.statusCode` must have one of the following values
  - `UAF_ASM_STATUS_OK`
  - `UAF_ASM_STATUS_ERROR`
- `ASMResponse.responseData` must be an object of type `GetInfoOut`. In the case of an error the values of the fields might be empty (e.g. array with no members).

See section 3.2.2 Mapping Authenticator Status Codes to ASM Status Codes for details on the mapping of authenticator status codes to ASM status codes.

3.5.1 GetInfoOut Dictionary

WebIDL

```
dictionary GetInfoOut {
    required AuthenticatorInfo[] Authenticators;
};
```

3.5.1.1 Dictionary `GetInfoOut` Members

`Authenticators` of type array of required AuthenticatorInfo
: List of authenticators reported by the current ASM. may be empty an empty list.

3.5.2 AuthenticatorInfo Dictionary

```
WebIDL
```

```
dictionary AuthenticatorInfo {
    required unsigned short                 authenticatorIndex;
    required Version[]                      asmVersions;
    required boolean                        isUserEnrolled;
    required boolean                        hasSettings;
    required AAID                           aaid;
    required DOMString                      assertionScheme;
    required unsigned short                 authenticationAlgorithm;
    required unsigned short[]               attestationTypes;
    required unsigned long                  userVerification;
    required unsigned short                 keyProtection;
    required unsigned short                 matcherProtection;
    required unsigned long                  attachmentHint;
    required boolean                        isSecondFactorOnly;
    required boolean                        isRoamingAuthenticator;
    required DOMString[]                    supportedExtensionIDs;
    required unsigned short                 tcDisplay;
    DOMString                               tcDisplayContentType;
    DisplayPNGCharacteristicsDescriptor[]   tcDisplayPNGCharacteristics;
    DOMString                               title;
    DOMString                               description;
    DOMString                               icon;
};
```

3.5.2.1 Dictionary `AuthenticatorInfo` Members

`authenticatorIndex` of type required unsigned short
: Authenticator index. Unique, within the scope of all authenticators reported by the ASM, index referring to an authenticator. This index is used by the UAF Client to refer to the appropriate authenticator in further requests.

`asmVersions` of type array of required Version
: A list of ASM Versions that this authenticator can be used with. For the definition of the `Version` dictionary see [UAFProtocol].

`isUserEnrolled` of type required boolean
: Indicates whether a user is enrolled with this authenticator. Authenticators which don't have user verification technology must always return true. Bound authenticators which support different profiles per operating system (OS) user must report enrollment status for the current OS user.

`hasSettings` of type required boolean
: A boolean value indicating whether the authenticator has its own settings. If so, then a FIDO UAF Client can launch these settings by sending a `OpenSettings` request.

`aaid` of type required AAID
: The "Authenticator Attestation ID" (AAID), which identifies the type and batch of the authenticator. See [UAFProtocol] for the definition of the AAID structure.

`assertionScheme` of type required DOMString
: The assertion scheme the authenticator uses for attested data and signatures.

  AssertionScheme identifiers are defined in the UAF Protocol specification [UAFProtocol].

`authenticationAlgorithm` of type required unsigned short
: Indicates the authentication algorithm that the authenticator uses. Authentication algorithm identifiers are defined in are defined in [FIDORegistry] with `ALG_` prefix.

`attestationTypes` of type array of required unsigned short
: Indicates attestation types supported by the authenticator. Attestation type TAGs are defined in [UAFRegistry] with `TAG_ATTESTATION` prefix

`userVerification` of type required unsigned long
: A set of bit flags indicating the user verification method(s) supported by the authenticator. The values are defined by the `USER_VERIFY` constants in [FIDORegistry].

`keyProtection` of type required unsigned short
: A set of bit flags indicating the key protections used by the authenticator. The values are defined by the `KEY_PROTECTION` constants in [FIDORegistry].

`matcherProtection` of type required unsigned short
: A set of bit flags indicating the matcher protections used by the authenticator. The values are defined by the `MATCHER_PROTECTION` constants in [FIDORegistry].

`attachmentHint` of type required unsigned long
: A set of bit flags indicating how the authenticator is currently connected to the system hosting the FIDO UAF Client software. The values are defined by the `ATTACHMENT_HINT` constants defined in [FIDORegistry].

> NOTE
>
> Because the connection state and topology of an authenticator may be transient, these values are only hints that can be used by server-supplied policy to guide the user experience, e.g. to prefer a device that is connected and ready for authenticating or confirming a low-value transaction, rather than one that is more secure but requires more user effort. These values are not reflected in authenticator metadata and cannot be relied on by the relying party, although some models of authenticator may provide attested measurements with similar semantics as part of UAF protocol messages.

`isSecondFactorOnly` of type required boolean
: Indicates whether the authenticator can be used only as a second factor.

`isRoamingAuthenticator` of type required boolean
: Indicates whether this is a roaming authenticator or not.

`supportedExtensionIDs` of type array of required DOMString
: List of supported UAF extension Ids. may be an empty list.

`tcDisplay` of type required unsigned short
: A set of bit flags indicating the availability and type of the authenticator's transaction confirmation display. The values are defined by the

`TRANSACTION_CONFIRMATION_DISPLAY` constants in [FIDORegistry].

This value must be 0 if transaction confirmation is not supported by the authenticator.

`tcDisplayContentType` of type DOMString
Supported transaction content type [FIDOMetadataStatement].

This value must be present if transaction confirmation is supported, i.e. `tcDisplay` is non-zero.

`tcDisplayPNGCharacteristics` of type array of DisplayPNGCharacteristicsDescriptor
Supported transaction Portable Network Graphic (PNG) type [FIDOMetadataStatement]. For the definition of the `DisplayPNGCharacteristicsDescriptor` structure see [FIDOMetadataStatement].

This list must be present if PNG-image based transaction confirmation is supported, i.e. `tcDisplay` is non-zero and `tcDisplayContentType` is `image/png`.

`title` of type DOMString
A human-readable short title for the authenticator. It should be localized for the current locale.

> NOTE
>
> If the ASM doesn't return a title, the FIDO UAF Client must provide a title to the calling App. See section "Authenticator interface" in [UAFAppAPIAndTransport].

`description` of type DOMString
Human-readable longer description of what the authenticator represents.

> NOTE
>
> This text should be localized for current locale.
>
> The text is intended to be displayed to the user. It might deviate from the description specified in the metadata statement for the authenticator [FIDOMetadataStatement].
>
> If the ASM doesn't return a description, the FIDO UAF Client will provide a description to the calling application. See section "Authenticator interface" in [UAFAppAPIAndTransport].

`icon` of type DOMString
Portable Network Graphic (PNG) format image file representing the icon encoded as a data: url [RFC2397].

> NOTE
>
> If the ASM doesn't return an icon, the FIDO UAF Client will provide a default icon to the calling application. See section "Authenticator interface" in [UAFAppAPIAndTransport].

3.6 Register Request

Verify the user and return an authenticator-generated UAF registration assertion.

For a Register request, the following **`ASMRequest`** member(s) must have the following value(s). The remaining **`ASMRequest`** members should be omitted:

- `ASMRequest.requestType` must be set to `Register`
- `ASMRequest.asmVersion` must be set to the desired version
- `ASMRequest.authenticatorIndex` must be set to the target authenticator index
- `ASMRequest.args` must be set to an object of type `RegisterIn`

For a Register response, the following **`ASMResponse`** member(s) must have the following value(s). The remaining **`ASMResponse`** members should be omitted:

- `ASMResponse.statusCode` must have one of the following values:
  - `UAF_ASM_STATUS_OK`
  - `UAF_ASM_STATUS_ERROR`
  - `UAF_ASM_STATUS_ACCESS_DENIED`
  - `UAF_ASM_STATUS_USER_CANCELLED`
  - `UAF_ASM_STATUS_AUTHENTICATOR_DISCONNECTED`
  - `UAF_ASM_STATUS_USER_NOT_RESPONSIVE`
  - `UAF_ASM_STATUS_INSUFFICIENT_AUTHENTICATOR_RESOURCES`
  - `UAF_ASM_STATUS_USER_LOCKOUT`
  - `UAF_ASM_STATUS_USER_NOT_ENROLLED`
- `ASMResponse.responseData` must be an object of type `RegisterOut`. In the case of an error the values of the fields might be empty (e.g. empty strings).

3.6.1 RegisterIn Object

WebIDL

```
dictionary RegisterIn {
    required DOMString      appID;
    required DOMString      username;
    required DOMString      finalChallenge;
    required unsigned short attestationType;
};
```

3.6.1.1 Dictionary `RegisterIn` Members

appID of type required DOMString
: The FIDO server Application Identity.

username of type required DOMString
: Human-readable user account name

finalChallenge of type required DOMString
: base64url-encoded challenge data [RFC4648]

attestationType of type required unsigned short
: Single requested attestation type

3.6.2 RegisterOut Object

WebIDL

```
dictionary RegisterOut {
    required DOMString assertion;
    required DOMString assertionScheme;
};
```

3.6.2.1 Dictionary `RegisterOut` Members

assertion of type required DOMString
: FIDO UAF authenticator registration assertion, base64url-encoded

assertionScheme of type required DOMString
: Assertion scheme.

  AssertionScheme identifiers are defined in the UAF Protocol specification [UAFProtocol].

3.6.3 Detailed Description for Processing the Register Request

Refer to [UAFAuthnrCommands] document for more information about the TAGs and structure mentioned in this paragraph.

1. Locate authenticator using `authenticatorIndex`. If the authenticator cannot be located, then fail with `UAF_ASM_STATUS_AUTHENTICATOR_DISCONNECTED`.
2. If a user is already enrolled with this authenticator (such as biometric enrollment, PIN setup, etc. for example) then the ASM must request that the authenticator verifies the user.

   > NOTE
   >
   > If the authenticator supports `UserVerificationToken` (see [UAFAuthnrCommands]), then the ASM must obtain this token in order to later include it with the `Register` command.

   If the user is locked out (e.g. too many failed attempts to get verified) and the authenticator cannot automatically trigger unblocking, return `UAF_ASM_STATUS_USER_LOCKOUT`.

   - If verification fails, return `UAF_ASM_STATUS_ACCESS_DENIED`
3. If the user is not enrolled with the authenticator then take the user through the enrollment process.
   - If neither the ASM nor the Authenticator can trigger the enrollment process, return `UAF_ASM_STATUS_USER_NOT_ENROLLED`.
   - If enrollment fails, return `UAF_ASM_STATUS_ACCESS_DENIED`
4. Construct `KHAccessToken` (see section KHAccessToken for more details)
5. Hash the provided `RegisterIn.finalChallenge` using the authenticator-specific hash function (`FinalChallengeHash`)

   An authenticator's preferred hash function information must meet the algorithm defined in the `AuthenticatorInfo.authenticationAlgorithm` field.
6. Create a `TAG_UAFV1_REGISTER_CMD` structure and pass it to the authenticator
   1. Copy `FinalChallengeHash`, `KHAccessToken`, `RegisterIn.Username`, `UserVerificationToken`, `RegisterIn.AppID`, `RegisterIn.AttestationType`
      1. Depending on `AuthenticatorType` some arguments may be optional. Refer to [UAFAuthnrCommands] for more information on authenticator types and their required arguments.
7. Invoke the command and receive the response. If the authenticator returns an error, handle that error appropriately. If the connection to the authenticator gets lost and cannot be restored, return `UAF_ASM_STATUS_AUTHENTICATOR_DISCONNECTED`. If the operation finally fails, map the authenticator error code to the the appropriate ASM error code (see section 3.2.2 Mapping Authenticator Status Codes to ASM Status Codes for details).
8. Parse `TAG_UAFV1_REGISTER_CMD_RESP`
   1. Parse the content of `TAG_AUTHENTICATOR_ASSERTION` (e.g. `TAG_UAFV1_REG_ASSERTION`) and extract `TAG_KEYID`
9. If the authenticator is a bound authenticator
   1. Store `CallerID`, `AppID`, `TAG_KEYHANDLE`, `TAG_KEYID` and `CurrentTimestamp` in the ASM's database.

      > NOTE
      >
      > What data an ASM will store at this stage depends on underlying authenticator's architecture. For example some authenticators might store AppID, KeyHandle, KeyID inside their own secure storage. In this case ASM doesn't have to store these data in its database.
10. Create a `RegisterOut` object
    1. Set `RegisterOut.assertionScheme` according to `AuthenticatorInfo.assertionScheme`
    2. Encode the content of `TAG_AUTHENTICATOR_ASSERTION` (e.g. `TAG_UAFV1_REG_ASSERTION`) in base64url format and set as `RegisterOut.assertion`.
    3. Return `RegisterOut` object

3.7 Authenticate Request

Verify the user and return authenticator-generated UAF authentication assertion.

For an Authenticate request, the following **`ASMRequest`** member(s) must have the following value(s). The remaining **`ASMRequest`** members should be omitted:

- `ASMRequest.requestType` must be set to `Authenticate`.
- `ASMRequest.asmVersion` must be set to the desired version.
- `ASMRequest.authenticatorIndex` must be set to the target authenticator index.
- `ASMRequest.args` must be set to an object of type `AuthenticateIn`

For an Authenticate response, the following **`ASMResponse`** member(s) must have the following value(s). The remaining **`ASMResponse`** members should be omitted:

- `ASMResponse.statusCode` must have one of the following values:
  - `UAF_ASM_STATUS_OK`
  - `UAF_ASM_STATUS_ERROR`
  - `UAF_ASM_STATUS_ACCESS_DENIED`
  - `UAF_ASM_STATUS_USER_CANCELLED`
  - `UAF_ASM_STATUS_CANNOT_RENDER_TRANSACTION_CONTENT`
  - `UAF_ASM_STATUS_KEY_DISAPPEARED_PERMANENTLY`
  - `UAF_ASM_STATUS_AUTHENTICATOR_DISCONNECTED`
  - `UAF_ASM_STATUS_USER_NOT_RESPONSIVE`
  - `UAF_ASM_STATUS_USER_LOCKOUT`
  - `UAF_ASM_STATUS_USER_NOT_ENROLLED`
- `ASMResponse.responseData` must be an object of type `AuthenticateOut`. In the case of an error the values of the fields might be empty (e.g. empty strings).

3.7.1 AuthenticateIn Object

WebIDL

```
dictionary AuthenticateIn {
    required DOMString appID;
    DOMString[]        keyIDs;
    required DOMString finalChallenge;
    Transaction[]      transaction;
};
```

3.7.1.1 Dictionary `AuthenticateIn` Members

`appID` of type required DOMString
: appID string

`keyIDs` of type array of DOMString
: base64url [RFC4648] encoded keyIDs

`finalChallenge` of type required DOMString
: base64url [RFC4648] encoded final challenge

`transaction` of type array of *Transaction*
: An array of transaction data to be confirmed by user. If multiple transactions are provided, then the ASM must select the one that best matches the current display characteristics.

> NOTE
>
> This may, for example, depend on whether user's device is positioned horizontally or vertically at the moment of transaction.

3.7.2 Transaction Object

WebIDL

```
dictionary Transaction {
    required DOMString                  contentType;
    required DOMString                  content;
    DisplayPNGCharacteristicsDescriptor tcDisplayPNGCharacteristics;
};
```

3.7.2.1 Dictionary `Transaction` Members

`contentType` of type required DOMString
: Contains the MIME Content-Type supported by the authenticator according to its metadata statement (see [FIDOMetadataStatement])

`content` of type required DOMString
: Contains the base64url-encoded [RFC4648] transaction content according to the `contentType` to be shown to the user.

`tcDisplayPNGCharacteristics` of type DisplayPNGCharacteristicsDescriptor
: Transaction content PNG characteristics. For the definition of the `DisplayPNGCharacteristicsDescriptor` structure See [FIDOMetadataStatement].

3.7.3 AuthenticateOut Object

WebIDL

```
dictionary AuthenticateOut {
    required DOMString assertion;
    required DOMString assertionScheme;
};
```

3.7.3.1 Dictionary `AuthenticateOut` Members

`assertion` of type required DOMString
Authenticator UAF authentication assertion.

`assertionScheme` of type required DOMString
Assertion scheme

3.7.4 Detailed Description for Processing the Authenticate Request

Refer to the [UAFAuthnrCommands] document for more information about the TAGs and structure mentioned in this paragraph.

1. Locate the authenticator using `authenticatorIndex`. If the authenticator cannot be located, then fail with `UAF_ASM_STATUS_AUTHENTICATOR_DISCONNECTED`.
2. If no user is enrolled with this authenticator (such as biometric enrollment, PIN setup, etc.), return `UAF_ASM_STATUS_ACCESS_DENIED`
3. The ASM must request the authenticator to verify the user.
   - If the user is locked out (e.g. too many failed attempts to get verified) and the authenticator cannot automatically trigger unblocking, return `UAF_ASM_STATUS_USER_LOCKOUT`.
   - If verification fails, return `UAF_ASM_STATUS_ACCESS_DENIED`

   > NOTE
   >
   > If the authenticator supports `UserVerificationToken` (see [UAFAuthnrCommands]), the ASM must obtain this token in order to later pass to `Sign` command.

4. Construct `KHAccessToken` (see section KHAccessToken for more details)
5. Hash the provided `AuthenticateIn.finalChallenge` using an authenticator-specific hash function (`FinalChallengeHash`).

   The authenticator's preferred hash function information must meet the algorithm defined in the `AuthenticatorInfo.authenticationAlgorithm` field.

6. If this is a Second Factor authenticator and `AuthenticateIn.keyIDs` is empty, then return `UAF_ASM_STATUS_ACCESS_DENIED`
7. If AuthenticateIn.keyIDs is not empty,
   1. If this is a bound authenticator, then look up ASM's database with `AuthenticateIn.appID` and `AuthenticateIn.keyIDs` and obtain the KeyHandles associated with it.
      - Return `UAF_ASM_STATUS_KEY_DISAPPEARED_PERMANENTLY` if the related key disappeared permanently from the authenticator.
      - Return `UAF_ASM_STATUS_ACCESS_DENIED` if no entry has been found.
   2. If this is a roaming authenticator, then treat `AuthenticateIn.keyIDs` as KeyHandles
8. Create `TAG_UAFV1_SIGN_CMD` structure and pass it to the authenticator.
   1. Copy `AuthenticateIn.AppID`, `AuthenticateIn.Transaction.content` (if not empty), `FinalChallengeHash`, `KHAccessToken`, `UserVerificationToken`, `KeyHandles`
      - Depending on AuthenticatorType some arguments may be optional. Refer to [UAFAuthnrCommands] for more information on authenticator types and their required arguments.
      - If multiple transactions are provided, select the one that best matches the current display characteristics.

        > NOTE
        >
        > This may, for example, depend on whether user's device is positioned horizontally or vertically at the moment of transaction.

      - Decode the base64url encoded `AuthenticateIn.Transaction.content` before passing it to the authenticator
9. Invoke the command and receive the response. If the authenticator returns an error, handle that error appropriately. If the connection to the authenticator gets lost and cannot be restored, return `UAF_ASM_STATUS_AUTHENTICATOR_DISCONNECTED`. If the operation finally fails, map the authenticator error code to the appropriate ASM error code (see section 3.2.2 Mapping Authenticator Status Codes to ASM Status Codesfor details).
10. Parse `TAG_UAFV1_SIGN_CMD_RESP`
    - If it's a first-factor authenticator and the response includes `TAG_USERNAME_AND_KEYHANDLE`, then
      1. Extract usernames from `TAG_USERNAME_AND_KEYHANDLE` fields
      2. If two or more equal usernames are found, then choose the one which has registered most recently

         > NOTE
         >
         > After this step, a first-factor bound authenticator which stores KeyHandles inside the ASM's database may delete the redundant KeyHandles from the ASM's database. This avoids having unusable (old) private key in the authenticator which (surprisingly) might become active after deregistering the newly generated one.

      3. Show remaining distinct usernames and ask the user to choose a single username
      4. Set `TAG_UAFV1_SIGN_CMD.KeyHandles` to the single KeyHandle associated with the selected username.
      5. Go to step #8 and send a new `TAG_UAFV1_SIGN_CMD command`
11. Create the `AuthenticateOut` object
    1. Set `AuthenticateOut.assertionScheme` as `AuthenticatorInfo.assertionScheme`
    2. Encode the content of `TAG_AUTHENTICATOR_ASSERTION` (e.g. `TAG_UAFV1_AUTH_ASSERTION`) in base64url format and set as `AuthenticateOut.assertion`
    3. Return the `AuthenticateOut` object

> NOTE
>
> Some authenticators might support "Transaction Confirmation Display" functionality not inside the authenticator but within the boundaries of the ASM. Typically these are software based Transaction Confirmation Displays. When processing the `Sign` command with a given transaction such ASM should show transaction content in its own UI and after user confirms it -- pass the content to authenticator so that the authenticator includes it in the final assertion.

See [FIDORegistry] for flags describing Transaction Confirmation Display type.

The authenticator metadata statement must truly indicate the type of transaction confirmation display implementation. Typically the "Transaction Confirmation Display" flag will be set to `TRANSACTION_CONFIRMATION_DISPLAY_ANY` (bitwise) or `TRANSACTION_CONFIRMATION_DISPLAY_PRIVILEGED_SOFTWARE`.

3.8 Deregister Request

Delete registered UAF record from the authenticator.

For a Deregister request, the following **`ASMRequest`** member(s) must have the following value(s). The remaining **`ASMRequest`** members should be omitted:

- `ASMRequest.requestType` must be set to `Deregister`
- `ASMRequest.asmVersion` must be set to the desired version
- `ASMRequest.authenticatorIndex` must be set to the target authenticator index
- `ASMRequest.args` must be set to an object of type `DeregisterIn`

For a Deregister response, the following **`ASMResponse`** member(s) must have the following value(s). The remaining **`ASMResponse`** members should be omitted:

- `ASMResponse.statusCode` must have one of the following values:
  - `UAF_ASM_STATUS_OK`
  - `UAF_ASM_STATUS_ERROR`
  - `UAF_ASM_STATUS_ACCESS_DENIED`
  - `UAF_ASM_STATUS_AUTHENTICATOR_DISCONNECTED`

3.8.1 DeregisterIn Object

WebIDL

```
dictionary DeregisterIn {
    required DOMString appID;
    required DOMString keyID;
};
```

3.8.1.1 Dictionary `DeregisterIn` Members

`appID` of type required DOMString
: FIDO Server Application Identity

`keyID` of type required DOMString
: Base64url-encoded [RFC4648] key identifier of the authenticator to be de-registered. The `keyID` can be an empty string. In this case all `keyID`s related to this `appID` must be deregistered.

3.8.2 Detailed Description for Processing the Deregister Request

Refer to [UAFAuthnrCommands] for more information about the TAGs and structures mentioned in this paragraph.

1. Locate the authenticator using `authenticatorIndex`
2. Construct `KHAccessToken` (see section KHAccessToken for more details).
3. If this is a bound authenticator, then
   - If the value of `DeregisterIn.keyID` is an empty string, then lookup all pairs of this `appID` and any `keyID` mapped to this `authenticatorIndex` and delete them. Go to step 4.
   - Otherwise, lookup the authenticator related data in the ASM database and delete the record associated with `DeregisterIn.appID` and `DeregisterIn.keyID`. Go to step 4.
4. Create the `TAG_UAFV1_DEREGISTER_CMD` structure, copy `KHAccessToken` and `DeregisterIn.keyID` and pass it to the authenticator.

   > NOTE
   >
   > In the case of roaming authenticators, the `keyID` passed to the authenticator might be an empty string. The authenticator is supposed to deregister all keys related to this `appID` in this case.

5. Invoke the command and receive the response. If the authenticator returns an error, handle that error appropriately. If the connection to the authenticator gets lost and cannot be restored, return `UAF_ASM_STATUS_AUTHENTICATOR_DISCONNECTED`. If the operation finally fails, map the authenticator error code to the appropriate ASM error code (see section 3.2.2 Mapping Authenticator Status Codes to ASM Status Codes for details). Return proper ASMResponse.

3.9 GetRegistrations Request

Return all registrations made for the calling FIDO UAF Client.

For a GetRegistrations request, the following **`ASMRequest`** member(s) must have the following value(s). The remaining **`ASMRequest`** members should be omitted:

- `ASMRequest.requestType` must be set to `GetRegistrations`
- `ASMRequest.asmVersion` must be set to the desired version
- `ASMRequest.authenticatorIndex` must be set to corresponding ID

For a GetRegistrations response, the following **`ASMResponse`** member(s) must have the following value(s). The remaining **`ASMResponse`** members should be omitted:

- `ASMResponse.statusCode` must have one of the following values:
  - `UAF_ASM_STATUS_OK`
  - `UAF_ASM_STATUS_ERROR`

- UAF_ASM_STATUS_AUTHENTICATOR_DISCONNECTED

- The ASMResponse.responseData must be an object of type GetRegistrationsOut. In the case of an error the values of the fields might be empty (e.g. empty strings).

3.9.1 GetRegistrationsOut Object

```
WebIDL

dictionary GetRegistrationsOut {
    required AppRegistration[] appRegs;
};
```

3.9.1.1 Dictionary `GetRegistrationsOut` Members

`appRegs` of type array of required AppRegistration
: List of registrations associated with an appID (see AppRegistration below). may be an empty list.

3.9.2 AppRegistration Object

```
WebIDL

dictionary AppRegistration {
    required DOMString   appID;
    required DOMString[] keyIDs;
};
```

3.9.2.1 Dictionary `AppRegistration` Members

`appID` of type required DOMString
: FIDO Server Application Identity.

`keyIDs` of type array of required DOMString
: List of key identifiers associated with the appID

3.9.3 Detailed Description for Processing the GetRegistrations Request

1. Locate the authenticator using authenticatorIndex
2. If this is bound authenticator, then
   - Lookup the registrations associated with CallerID and AppID in the ASM database and construct a list of AppRegistration objects

   > NOTE
   >
   > Some ASMs might not store this information inside their own database. Instead it might have been stored inside the authenticator's secure storage area. In this case the ASM must send a proprietary command to obtain the necessary data.

3. Create GetRegistrationsOut object and return

3.10 OpenSettings Request

Display the authenticator-specific settings interface. If the authenticator has its own built-in user interface, then the ASM must invoke TAG_UAFV1_OPEN_SETTINGS_CMD to display it.

For an OpenSettings request, the following **`ASMRequest`** member(s) must have the following value(s). The remaining **`ASMRequest`** members should be omitted:

- ASMRequest.requestType must be set to OpenSettings
- ASMRequest.asmVersion must be set to the desired version
- ASMRequest.authenticatorIndex must be set to the target authenticator index

For an OpenSettings response, the following **`ASMResponse`** member(s) must have the following value(s). The remaining **`ASMResponse`** members should be omitted:

- ASMResponse.statusCode must have one of the following values:
  - UAF_ASM_STATUS_OK

4. Using ASM API

This section is non-normative.

In a typical implementation, the FIDO UAF Client will call GetInfo during initialization and obtain information about the authenticators. Once the information is obtained it will typically be used during FIDO UAF message processing to find a match for given FIDO UAF policy. Once a match is found the FIDO UAF Client will send the appropriate request (Register/Authenticate/Deregister...) to this ASM.

The FIDO UAF Client may use the information obtained from a GetInfo response to display relevant information about an authenticator to the user.

5. Using the ASM API on various platforms

This section is normative.

5.1 Android ASM Intent API

On Android systems FIDO UAF ASMs may be implemented as a separate APK-packaged application.

The FIDO UAF Client invokes ASM operations via Android Intents. All interactions between the FIDO UAF Client and an ASM on Android takes place through the following intent identifier:

`org.fidoalliance.intent.FIDO_OPERATION`

To carry messages described in this document, an intent must also have its `type` attribute set to `application/fido.uaf_asm+json`.

ASMs must register that intent in their manifest file and implement a handler for it.

FIDO UAF Clients must append an extra, `message`, containing a `String` representation of a **`ASMRequest`**, before invoking the intent.

FIDO UAF Clients must invoke ASMs by calling `startActivityForResult()`

FIDO UAF Clients should assume that ASMs will display an interface to the user in order to handle this intent, e.g. prompting the user to complete the verification ceremony. However, the ASM should not display any user interface when processing a `GetInfo` request.

After processing is complete the ASM will return the response intent as an argument to `onActivityResult()`. The response intent will have an extra, `message`, containing a `String` representation of a **`ASMResponse`**.

5.1.1 Discovering ASMs

FIDO UAF Clients can discover the ASMs available on the system by using `PackageManager.queryIntentActivities(Intent intent, int flags)` with the FIDO Intent described above to see if any activities are available.

A typical FIDO UAF Client will enumerate all ASM applications using this function and will invoke the `GetInfo` operation for each one discovered.

5.1.2 Alternate Android AIDL Service ASM Implementation

The Android Intent API can also be implemented using Android AIDL services as an alternative transport mechanism to Android Intents. Please see Android Intent API section [UAFAppAPIAndTransport] for differences between the Android AIDL service and Android Intent implementation.

5.2 Windows ASM API

On Windows, an ASM is implemented in the form of a Dynamic Link Library (DLL). The following is an example `asmplugin.h` header file defining a Windows ASM API:

EXAMPLE 1

```
/*! @file asm.h
*/

#ifndef __ASMH_
#define __ASMH_
#ifdef _WIN32
#define ASM_API __declspec(dllexport)
#endif

#ifdef _WIN32
#pragma warning ( disable : 4251 )
#endif

#define ASM_FUNC extern "C" ASM_API
#define ASM_NULL 0

/*! \brief Error codes returned by ASM Plugin API.
*  Authenticator specific error codes are returned in JSON form.
*  See JSON schemas for more details.
*/

enum asmResult_t
{
  Success = 0, /**< Success */
  Failure /**< Generic failure */
};

/*! \brief Generic structure containing JSON string in UTF-8
*  format.
*  This structure is used throughout functions to pass and receives
*  JSON data.
*/

struct asmJSONData_t
{
  int length; /**< JSON data length */
  char pData; /*< JSON data */
};

/*! \brief Enumeration event types for authenticators.
These events will be fired when an authenticator becomes
  available (plugged) or unavailable (unplugged).
*/

enum asmEnumerationType_t
{
  Plugged = 0, /**< Indicates that authenticator Plugged to system */
  Unplugged /**< Indicates that authenticator Unplugged from system */
};

namespace ASM
{
  /*! \brief Callback listener.
  FIDO UAF Client must pass an object implementating this interface to
  Authenticator::Process function. This interface is used to provide
  ASM JSON based response data.*/
  class ICallback
  {
    public
      virtual ~ICallback() {}
      /**
      This function is called when ASM's response is ready.
      *
      @param response JSON based event data
      @param exchangeData must be provided by ASM if it needs some
      data back right after calling the callback function.
      The lifecycle of this parameter must be managed by ASM. ASM must
      allocate enough memory for getting the data back.
      */

      virtual void Callback(const asmJSONData_t &response,
      asmJSONData_t &exchangeData) = 0;
  };

  /*! \brief Authenticator Enumerator.
  FIDO UAF Client must provide an object implementing this
  interface. It will be invoked when a new authenticator is plugged or
  when an authenticator has been unplugged. */

  class IEnumerator
```

```
    {
      public
        virtual ~IEnumerator() {}
        /**
          This function is called when an authenticator is plugged or
       unplugged.
        * @param eventType event type (plugged/unplugged)
          @param AuthenticatorInfo JSON based GetInfoResponse object
        */

        virtual void Notify(const asmEnumerationType_t eventType, const
        asmJSONData_t &AuthenticatorInfo) = 0;
    };
}

/**
Initializes ASM plugin. This is the first function to be
     called.
*
@param pEnumerationListener caller provided Enumerator
*/

ASM_FUNC asmResult_t asmInit(ASM::IEnumerator
   *pEnumerationListener);
/**
Process given JSON request and returns JSON response.
*
If the caller wants to execute a function defined in ASM JSON
     schema then this is the function that must be called.
*
@param pInData input JSON data
@param pListener event listener for receiving events from ASM
*/
ASM_FUNC asmResult_t asmProcess(const asmJSONData_t *pInData,
   ASM::ICallback *pListener);
/**
Unitializes ASM plugin.
*
*/
ASM_FUNC asmResult_t asmUninit();
#endif // __ASMPLUGINH_
```

A Windows-based FIDO UAF Client must look for ASM DLLs in the following registry paths:

```
HKCU\Software\FIDO\UAF\ASM
```

```
HKLM\Software\FIDO\UAF\ASM
```

The FIDO UAF Client iterates over all keys under this path and looks for "path" field:

```
[HK**\Software\FIDO\UAF\ASM\<exampleASMName>]
```

```
"path"="<ABSOLUTE_PATH_TO_ASM>.dll"
```

`path` must point to the absolute location of the ASM DLL.

6. Security and Privacy Guidelines

This section is normative.

ASM developers must carefully protect the FIDO UAF data they are working with. ASMs must follow these security guidelines:

- ASMs must implement a mechanism for isolating UAF credentials registered by two different FIDO UAF Clients from one another. One FIDO UAF Client must not have access to FIDO UAF credentials that have been registered via a different FIDO UAF Client. This prevents malware from exercising credentials associated with a legitimate FIDO Client.

  > NOTE
  >
  > ASMs must properly protect their sensitive data against malware using platform-provided isolation capabilities in order to follow the assumptions made in [FIDOSecRef]. Malware with root access to the system or direct physical attack on the device are out of scope for this requirement.

  > NOTE
  >
  > The following are examples for achieving this:
  >
  > - If an ASM is bundled with a FIDO UAF Client, this isolation mechanism is already built-in.
  > - If the ASM and FIDO UAF Client are implemented by the same vendor, the vendor may implement proprietary mechanisms to bind its ASM exclusively to its own FIDO UAF Client.
  > - On some platforms ASMs and the FIDO UAF Clients may be assigned with a special privilege or permissions which regular applications don't have. ASMs built for such platforms may avoid supporting isolation of UAF credentials per FIDO UAF Clients since all FIDO UAF Clients will be considered equally trusted.

- An ASM designed specifically for bound authenticators must ensure that FIDO UAF credentials registered with one ASM cannot be accessed by another ASM. This is to prevent an application pretending to be an ASM from exercising legitimate UAF credentials.
  - Using a KHAccessToken offers such a mechanism.
- An ASMs must implement platform-provided security best practices for protecting UAF related stored data.
- ASMs must not store any sensitive FIDO UAF data in its local storage, except the following:
  - `CallerID`, `ASMToken`, `PersonaID`, `KeyID`, `KeyHandle`, `AppID`

  > NOTE

> An ASM, for example, must never store a username provided by a FIDO Server in its local storage in a form other than being decryptable exclusively by the authenticator.

- ASMs should ensure that applications cannot use silent authenticators for tracking purposes. ASMs implementing support for a silent authenticator must show, during every registration, a user interface which explains what a silent authenticator is, asking for the users consent for the registration. Also, it is recommended that ASMs designed to support roaming silent authenticators either
  - Run with a special permission/privilege on the system, or
  - Have a built-in binding with the authenticator which ensures that other applications cannot directly communicate with the authenticator by bypassing this ASM.

6.1 KHAccessToken

`KHAccessToken` is an access control mechanism for protecting an authenticator's FIDO UAF credentials from unauthorized use. It is created by the ASM by mixing various sources of information together. Typically, a `KHAccessToken` contains the following four data items in it: `AppID`, `PersonaID`, `ASMToken` and `CallerID`.

`AppID` is provided by the FIDO Server and is contained in every FIDO UAF message.

`PersonaID` is obtained by the ASM from the operational environment. Typically a different `PersonaID` is assigned to every operating system user account.

`ASMToken` is a randomly generated secret which is maintained and protected by the ASM.

> NOTE
>
> In a typical implementation an ASM will randomly generate an ASMToken when it is launched the first time and will maintain this secret until the ASM is uninstalled.

`CallerID` is the ID the platform has assigned to the calling FIDO UAF Client (e.g. "bundle ID" for iOS). On different platforms the *CallerID* can be obtained differently.

> NOTE
>
> For example on Android platform ASM can use the hash of the caller's `apk-signing-cert`.

The ASM uses the `KHAccessToken` to establish a link between the ASM and the key handle that is created by authenticator on behalf of this ASM.

The ASM provides the `KHAccessToken` to the authenticator with every command which works with key handles.

> NOTE
>
> The following example describes how the ASM constructs and uses `KHAccessToken`.
>
> - During a `Register` request
>   - Set `KHAccessToken` to a secret value only known to the ASM. This value will always be the same for this ASM.
>   - Append `AppID`
>   - `KHAccessToken = AppID`
>   - If a bound authenticator, append `ASMToken`, `PersonaID` and `CallerID`
>   - `KHAccessToken |= ASMToken | PersonaID | CallerID`
>   - Hash `KHAccessToken`
>   - Hash `KHAccessToken` using the authenticator's hashing algorithm. The reason of using authenticator specific hash function is to make sure of interoperability between ASMs. If interoperability is not required, an ASM can use any other secure hash function it wants.
>   - `KHAccessToken=hash(KHAccessToken)`
>   - Provide `KHAccessToken` to the authenticator
>   - The authenticator puts the `KHAccessToken` into `RawKeyHandle` (see [UAFAuthnrCommands] for more details)
> - During other commands which require `KHAccessToken` as input argument
>   - The ASM computes `KHAccessToken` the same way as during the `Register` request and provides it to the authenticator along with other arguments.
>   - The authenticator unwraps the provided key handle(s) and proceeds with the command only if `RawKeyHandle.KHAccessToken` is equal to the provided `KHAccessToken`.

Bound authenticators must support a mechanism for binding generated key handles to ASMs. The binding mechanism must have at least the same security characteristics as mechanism for protcting `KHAccessToken` described above. As a consequence it is recommended to securely derive `KHAccessToken` from `AppID`, `ASMToken`, `PersonaID` and the `CallerID`.

> NOTE
>
> It is recommended for roaming authenticators that the `KHAccessToken` contains only the `AppID` since otherwise users won't be able to use them on different machines (`PersonaID`, `ASMToken` and `CallerID` are platform specific). If the authenticator vendor decides to do that in order to address a specific use case, however, it is allowed.
>
> Including `PersonaID` in the `KHAccessToken` is optional for all types of authenticators. However an authenticator designed for multi-user systems will likely have to support it.

If an ASM for roaming authenticators doesn't use a `KHAccessToken` which is different for each `AppID`, the ASM must include the `AppID` in the command for a `deregister` request containing an empty `KeyID`.

6.2 Access Control for ASM APIs

The following table summarizes the access control requirements for each API call.

ASMs must implement the access control requirements defined below. ASM vendorsmay implement additional security mechanisms.

Terms used in the table:

- `NoAuth` -- no access control
- `CallerID` -- FIDO UAF Client's platform-assigned ID is verified
- `UserVerify` -- user must be explicitly verified
- `KeyIDList` -- must be known to the caller

Commands	First-factor bound authenticator	Second-factor bound authenticator	First-factor roaming authenticator	Second-factor roaming authenticator
GetInfo	NoAuth	NoAuth	NoAuth	NoAuth
OpenSettings	NoAuth	NoAuth	NoAuth	NoAuth
Register	UserVerify	UserVerify	UserVerify	UserVerify
Authenticate	UserVerify AppID CallerID PersonaID	UserVerify AppID KeyIDList CallerID PersonaID	UserVerify AppID	UserVerify AppiD KeyIDList
GetRegistrations*	CallerID PersonaID	CallerID PersonaID	X	X
Deregister	AppID KeyID PersonaID CallerID	AppID KeyID PersonaID CallerID	AppID KeyID	AppID KeyID

A. References

A.1 Normative references

[ECMA-262]
ECMAScript Language Specification. URL: https://tc39.github.io/ecma262/

[FIDOGlossary]
R. Lindemann, D. Baghdasaryan, B. Hill, J. Hodges, *FIDO Technical Glossary.* FIDO Alliance Proposed Standard. URLs:
HTML: fido-glossary-v1.1-rd-20160709.html
PDF: fido-glossary-v1.1-rd-20160709.pdf

[FIDOMetadataStatement]
B. Hill, D. Baghdasaryan, J. Kemp, *FIDO Metadata Statements v1.0.* FIDO Alliance Proposed Standard. URLs:
HTML: fido-metadata-statements.html.-v1.1-rd-20160709
PDF: fido-metadata-statements.pdf.-v1.1-rd-20160709

[FIDORegistry]
R. Lindemann, D. Baghdasaryan, B. Hill, *FIDO Registry of Predefined Values.* FIDO Alliance Proposed Standard. URLs:
HTML: fido-registry-v1.1-rd-20160709.html
PDF: fido-registry-v1.1-rd-20160709.pdf

[RFC2119]
S. Bradner. *Key words for use in RFCs to Indicate Requirement Levels* March 1997. Best Current Practice. URL: https://tools.ietf.org/html/rfc2119

[RFC4648]
S. Josefsson, *The Base16, Base32, and Base64 Data Encodings (RFC 4648)*, IETF, October 2006, URL:http://www.ietf.org/rfc/rfc4648.txt

[UAFAuthnrCommands]
D. Baghdasaryan, J. Kemp, R. Lindemann, R. Sasson, B. Hill, *FIDO UAF Authenticator Commands v1.0.* FIDO Alliance Proposed Standard. URLs:
HTML: fido-uaf-authnr-cmds-v1.1-rd-20160709.html
PDF: fido-uaf-authnr-cmds-v1.1-rd-20160709.pdf

[UAFProtocol]
R. Lindemann, D. Baghdasaryan, E. Tiffany, D. Balfanz, B. Hill, J. Hodges, *FIDO UAF Protocol Specification v1.0.* FIDO Alliance Proposed Standard. URLs:
HTML: fido-uaf-protocol-v1.1-rd-20160709.html
PDF: fido-uaf-protocol-v1.1-rd-20160709.pdf

[UAFRegistry]
R. Lindemann, D. Baghdasaryan, B. Hill, *FIDO UAF Registry of Predefined Values.* FIDO Alliance Proposed Standard. URLs:
HTML: fido-uaf-reg-v1.1-rd-20160709.html
PDF: fido-uaf-reg-v1.1-rd-20160709.pdf

[WebIDL-ED]
Cameron McCormack, *Web IDL*, W3C. Editor's Draft 13 November 2014. URL: http://heycam.github.io/webidl/

A.2 Informative references

[ECMA-404]
The JSON Data Interchange Format. 1 October 2013. Standard. URL:http://www.ecma-international.org/publications/files/ECMA-ST/ECMA-404.pdf

[FIDOSecRef]
R. Lindemann, D. Baghdasaryan, B. Hill, *FIDO Security Reference*. FIDO Alliance Proposed Standard. URLs:
HTML: fido-security-ref-v1.1-rd-20160709.html
PDF: fido-security-ref-v1.1-rd-20160709.pdf

[RFC2397]
L. Masinter. *The "data" URL scheme*. August 1998. Proposed Standard. URL:https://tools.ietf.org/html/rfc2397

[UAFAppAPIAndTransport]
B. Hill, D. Baghdasaryan, B. Blanke, *FIDO UAF Application API and Transport Binding Specification* FIDO Alliance Proposed Standard. URLs:
HTML: fido-uaf-client-api-transport-v1.1-rd-20160709.html
PDF: fido-uaf-client-api-transport-v1.1-rd-20160709.pdf

[WebIDL]
Cameron McCormack; Boris Zbarsky. *WebIDL Level 1*. 8 March 2016. W3C Candidate Recommendation. URL: https://www.w3.org/TR/WebIDL-1/