# 0.8m³ Self-loading Concrete Mixer

| TECHNICAL SPECIFICATIONS | | | |
|---|---|---|---|
| **Place of Origin** | Shandong, China | **Dimension (L*W*H)** | 4576*2510*1880 mm |
| **Tank Volume** | 1.3 $m^3$ | **Tank discharge** | 0.8 $m^3$ |
| **Curb Weight** | 3100 kg | **Ground clearance** | 250 mm |
| **Hydraulic Tank Capacity** | 95 L | **Diesel Fuel Tank Volume** | 120 L |
| **Wheebase** | 1650 mm | **Max. Gradeability** | 30 ° |

| TANK/POWER SYSTEM | | | Standard ● Options ○ |
|---|---|---|---|
| **Engine Model** | ● Yunei 490 | **Rated Power** | ● 42 kw |
| **Torque Converter Model** | ● JBJ-265 Split torque converter | **Drive Axle** | ● JBJ-8T Full-time 4WD |
| **Tyre Size** | ● 12-16.5 ● 4 Rounds | **Brake Type** | ● Pneumatic Brakes Dual Circuit System |
| **Speed of agitator** | 20 r/min | | |

| DRIVE & CONTROL SYSTEM | | | Standard ● Options ○ |
|---|---|---|---|
| **Cab Location** | ● Rear-mounted | **Air Conditioning** | ○ |
| **Max. Travel Speed** | ≤35 km/h | **Hydraulic Motor** | ● A2FM63 Cycloid Motor |
| **Water Tank Capacity** | ● 400 L | **Dipper Capacity** | 0.25 $m^3$ |

| OTHER STANDARD & OPTIONAL | |
|---|---|
| **Standard** | Unloading Vibrator / Dual Camera System / Display Screen<br>Luxury Suspension Seat / Digital Dashboard / Timed Water Intake System |
| **Optional** | Electronic Weighing System / Air Conditioning (A/C) with Heating<br>Cement Hopper |

## Product Advantages

**All-in-One Integration:** Combines loading, mixing, and discharging—a mobile batching plant on wheels.

**Enhanced Efficiency:** Streamlines operations to boost productivity while minimizing labor and time costs.

**Superior Versatility:** From crowded urban centers to remote regions. It excels in concrete road maintenance, industrial parks, construction projects, mining, and forestry.

## Product Display
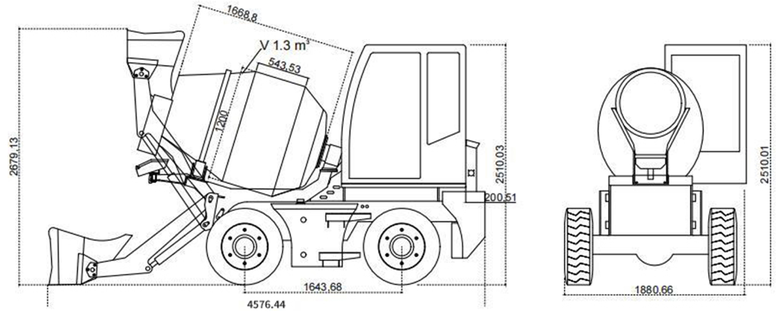
## Technical Drawings