2.6m³ Self-loading Concrete Mixer

TECHNICAL SPECIFICATIONS			
Place of Origin	Shandong, China	**Dimension (L*W*H)**	7040*2732*3189 mm
Tank Volume	3.95 m^3	**Tank discharge**	2.6 m^3
Curb Weight	6500 kg	**Ground clearance**	350 mm
Hydraulic Tank Capacity	95 L	**Diesel Fuel Tank Volume**	95 L
Wheebase	2570 mm	**Max. Gradeability**	40 °

TANK/POWER SYSTEM			Standard ● Options ○
Engine Model	● Yunei 4102 Turbo	**Rated Power**	● 78 kw
Torque Converter Model	● JBJ-278 Split torque converter	**Drive Axle**	● JBJ-10T Full-time 4WD
Tyre Size	● 16-70-20 ● 4 Rounds ○ 6 Rounds	**Brake Type**	● Pneumatic Brakes Dual Circuit System
Speed of agitator	20 r/min		

DRIVE & CONTROL SYSTEM			Standard ● Options ○
Cab Location	● Front-mounted	**Air Conditioning**	○
Max. Travel Speed	≤35 km/h	**Slewing support**	● Rotation Angle: 270°
Hydraulic Motor	● A2FM63 Cycloid Motor	**Water Tank Capacity**	● 750 L
Dipper Capacity	0.65 m^3		

OTHER STANDARD & OPTIONAL	
Standard	Unloading Vibrator / Dual Camera System / Display Screen / Luxury Suspension Seat Digital Dashboard / Pneumatic Ladder / Hydraulic Discharge Chute / LED Lighting System Timed Water Intake System / Diesel Self-priming Pump / High-Pressure Cleaning System
Optional	Electronic Weighing System / Air Conditioning (A/C) with Heating Cement Hopper / Luxury Operator Cab

Product Advantages

All-in-One Integration: Combines loading, mixing, and discharging—a mobile batching plant on wheels.

Enhanced Efficiency: Streamlines operations to boost productivity while minimizing labor and time costs.

Superior Versatility: From crowded urban centers to remote regions. It excels in concrete road maintenance, industrial parks, construction projects, mining, and forestry.

Product Display
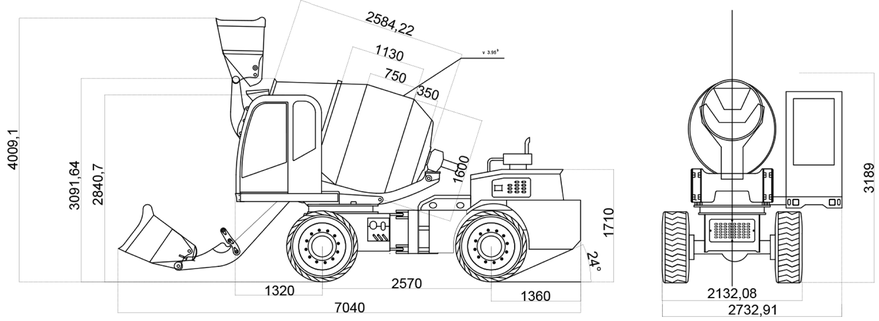
Technical Drawings