5m³ Self-loading Concrete Mixer

TECHNICAL SPECIFICATIONS			
Place of Origin	Shandong, China	**Dimension (L*W*H)**	8878*3050*3640 mm
Tank Volume	8.28 m^3	**Tank discharge**	5 m^3
Curb Weight	10800 kg	**Ground clearance**	380 mm
Hydraulic Tank Capacity	130 L	**Diesel Fuel Tank Volume**	130 L
Wheebase	2860 mm	**Max. Gradeability**	40 °

TANK/POWER SYSTEM			Standard ● Options ○
Engine Model	● YTO 6105 Turbo ○ Weichai 6105 Turbo	**Rated Power**	● 92 kw
Torque Converter Model	● JBJ-428 Split torque converter	**Drive Axle**	● JBJ-20T Full-time 4WD
Tyre Size	● 1200R 24 ● 6 Rounds	**Brake Type**	● Pneumatic Brakes Dual Circuit System
Speed of agitator	20 r/min		

DRIVE & CONTROL SYSTEM			Standard ● Options ○
Cab Location	● Front-mounted	**Air Conditioning**	○
Max. Travel Speed	≤35 km/h	**Slewing support**	● Rotation Angle: 270°
Hydraulic Motor	● A2FM63 Plunger Motor	**Water Tank Capacity**	● 1100 L
Dipper Capacity	0.75 m^3		

OTHER STANDARD & OPTIONAL	
Standard	Unloading Vibrator / Dual Camera System / Display Screen / Luxury Suspension Seat Digital Dashboard / Pneumatic Ladder / Hydraulic Discharge Chute / LED Lighting System Timed Water Intake System / Diesel Self-priming Pump / High-Pressure Cleaning System
Optional	Electronic Weighing System / Air Conditioning (A/C) with Heating Cement Hopper / Luxury Operator Cab

Product Advantages

All-in-One Integration: Combines loading, mixing, and discharging—a mobile batching plant on wheels.

Enhanced Efficiency: Streamlines operations to boost productivity while minimizing labor and time costs.

Superior Versatility: From crowded urban centers to remote regions. It excels in concrete road maintenance, industrial parks, construction projects, mining, and forestry.

Product Display
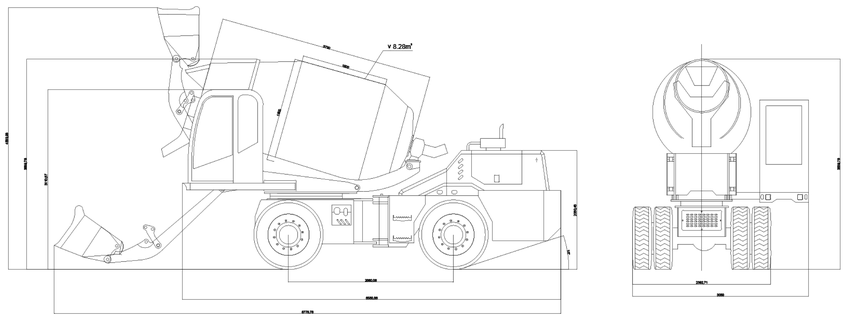
Technical Drawings