

Libraries contributed by users


The contributed libraries aren't available in the standard Arduino™ IDE installations and can be obtained from <http://dgit.in/ardlibrary>.

Installing the user contributed library:

1. Download the library.
2. In the menu bar, go to Sketch > Import Library > Add Library (as shown in the figure).
3. Select the downloaded .zip file and click on 'Open' to add the new library.
4. The new library will be added and can be seen at the end of the library list (Sketch > Import Library).



Adding user contributed libraries

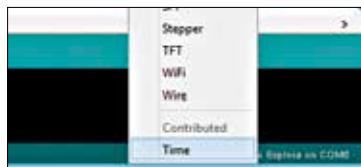

Library list showing newly added 'Time' library

Using user contributed libraries

Please note that user contributed libraries can't be used by the regular procedure of clicking on Time library in the list. They need to be included separately using the following code (This will be placed at the beginning of the code to be flashed on your board. See chapter 6 for more details on where to place this code):

- `#include<user _ contributed _ library.h>`
For the Time library we added, the syntax is:
- `#include<Time.h>`

Please be careful to use the proper case when adding libraries.

We'll be using libraries in the further chapter to interface a sensor and get the required data or to perform some tasks.

Arduino™ community

The Arduino™ community is an active group of Arduino™ enthusiasts and developers, both - beginners and experts. The Arduino™ forum at <http://dgit.in/ardforum> acts as a meeting place for the entire Arduino™ community. The forum is divided into sub-forums such as Using Arduino™, Topics, Development and Community for easy access.

From enthusiasts who create their own libraries and make them available to other users to third-party developers who create specialised hard-