

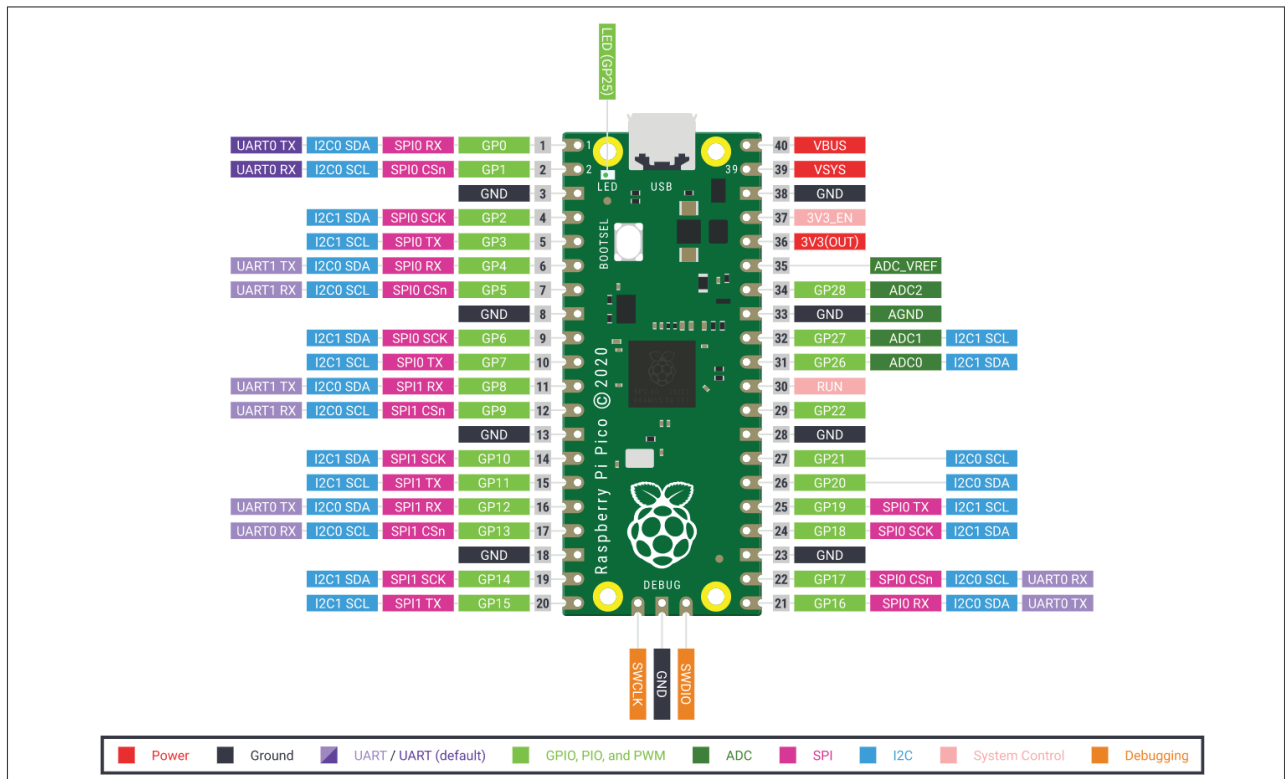


Figure 5: Official pin diagram of a Pico board

```
def gongrn():
    global rled, gled, yled
    rled.off()
    gled.on()
    yled.off()

def readyonylw():
    global rled, gled, yled
    rled.off()
    gled.off()
    yled.on()

while True:
    readyonylw()
    sleep(2)
    stoponred()
    sleep(5)
    gongrn()
    sleep(5)
```

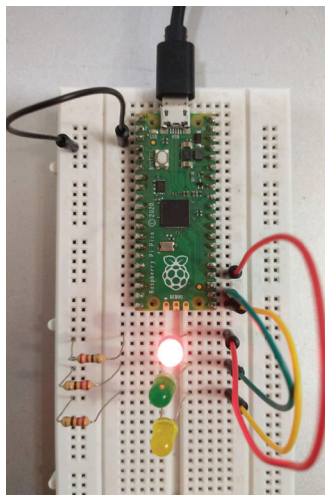


Figure 6: External LEDs in a traffic light pattern

batteries) connected through a micro-USB cable.

The low cost, power-efficient and versatile Raspberry Pi Pico boards have really opened the way for everyone to begin their IoT journey. We have just scratched the surface of the great IoT capabilities provided by the RPI Pico board to get you quickly started with it. Do explore the vast array of real-world projects available freely on the internet, as there is already a great open source ecosystem around it for you to create some breathtaking IoT systems. **END** 🐧

References

- RPI Pico official page, <https://www.raspberrypi.com/products/raspberry-pi-pico/>
- MicroPython firmware for Pico download page, https://micropython.org/download/RPI_PICO/
- Raspberry Pi Pico Python SDK official documentation, <https://datasheets.raspberrypi.com/pico/raspberry-pi-pico-python-sdk.pdf>
- Raspberry Pi Pico MicroPython official examples site, <https://github.com/raspberrypi/pico-micropython-examples>

By: Ankur Kumar

The author is a passionate hacker/researcher of free and open source software. He loves to explore cutting-edge technologies, ancient sciences, quantum spirituality, various genres of music, mystical literature and art.

Please note that the Pico board has multiple pins to supply the necessary voltage to drive external electronic components like LEDs, etc. Once programmed through the Thonny IDE on your computer, you can also power up your Pico board independently through a single battery of 5V (or 3 x 1.5V