

About the ZXU1

The ZXU1 lantern incorporates a Sealsafe® optical unit. This technology has been proven in service since 1985.

Assurance

The ZXU1 luminaire contains a Sealsafe® optical unit of IP66 tightness and is manufactured under quality systems in accordance with EN ISO 9001.

Main Benefits

Efficient photometry has been achieved using a metallised plastic or high purity aluminium reflector. Compact, slim, vandal resistant design, built with minimised maintenance in mind. Suitable for post-top or side-entry mounting.


Optical System

Incorporates a range of high performance IP66-rated reflector and protector bowl combinations.



ZXU1 Dished Polycarbonate

WEIGHTS & DIMENSIONS

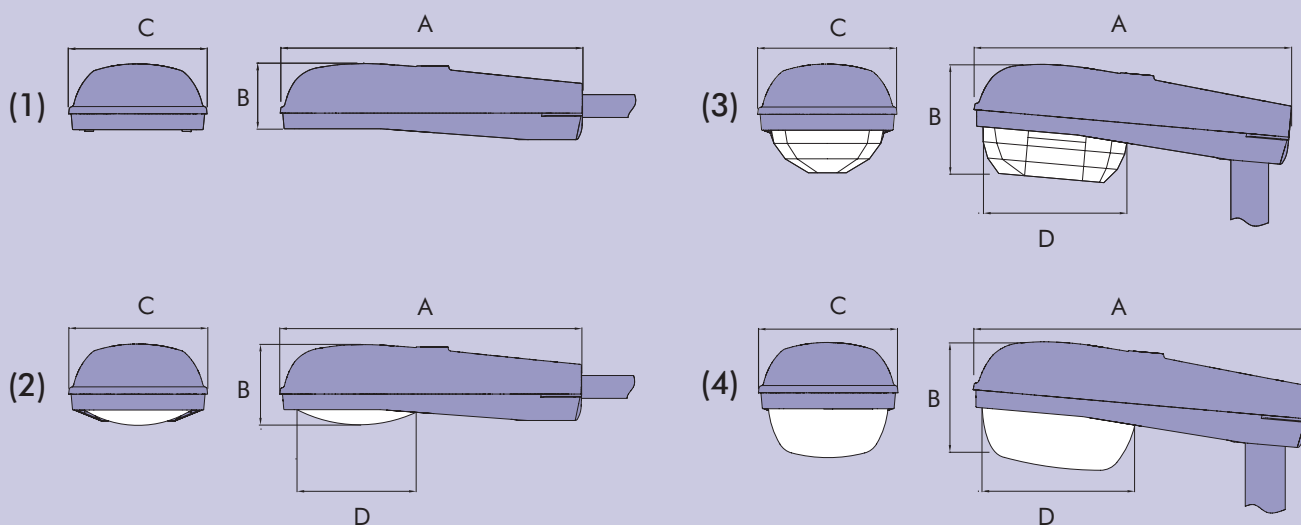

(1) FLAT GLASS

(2) DISHED POLYCARBONATE

(3) REFRACTOR BOWL

(4) DEEP BOWL

LAMP AND GEAR	WEIGHT	PROTECTOR	PROJECTED SIDE AREA	DIMENSIONS (mm)			
				A	B	C	D
50 Watt SON-T Plus 70 Watt SON-T Plus 100 Watt SON-T Plus	6.1kg 6.3kg 6.6kg	Flat Glass	0.081m ²	636	163	290	–
		Dished Polycarbonate	0.087m ²	636	172	290	292
		Prismatic Refractor	0.105m ²	636	231	290	292
		Deep Bowl	0.106m ²	636	239	290	292

f u n c t i o n a l

SPECIFICATIONS

How to specify

Luminaire for public lighting, for lamps with power rating of 50 Watts up to 100 Watts, that consists of an injection-moulded aluminium alloy body, with a cover made out of acrylonitrile polystyrene, stabilised against UV rays. An optical compartment comprising a protector permanently bonded onto a reflector. A reflector made out of deep drawn, polished and anodised aluminium or out of metallised plastic; a removable control gear plate and a mounting system for both horizontal ($\varnothing$ 32-42-48mm) or vertical ($\varnothing$ 60-76mm) mounting.

Applications

The design of the ZXU1 luminaire combines simplicity with high mechanical quality and effective light distribution. The ZXU1 is ideal for the lighting of subsidiary roads, associated pedestrian areas and traffic routes to EN 13201:2003 and BS5489:2003. Also ideal for security lighting and car parks.

Description

The luminaire comprises a high pressure die cast aluminium body finished in polyester powder coated grey, with an injection moulded acrylonitrile polystyrene protective cover, coloured in either grey or black. The protector is bonded to the reflector to form a Sealsafe® sealed beam optical unit, with an IP66 tightness rating. The control gear is integral, in a compartment sealed to IP54.

Lamps

50 Watt, 70 Watt or 100 Watt clear tubular high pressure sodium lamp.

Installation

Horizontal mounting on 48mm, 42mm and 32mm diameter bracket arm, with 95mm penetration. Locking by means of two M10 stainless steel Allen screws. Vertical mounting on a 76mm or 60mm diameter straight column, 85mm penetration, giving 5° lantern inclination (optional 0°). Locking by means of two M10 stainless steel Allen screws.

Maintenance: The control gear is accessed by lifting the top cover. This is retained in place by four clips and two retained cover screws, giving access to the Sealsafe® system and gear tray assembly. The Sealsafe® system is a sealed beam optical unit with an IP66 tightness rating.

Photometry: Available electronically or as a graphical report.

Options

- Post-top inclination shim to give 0° inclination
- Flat glass
- Dished polycarbonate (DP)
- Acrylic or polycarbonate refractor bowl
- Curved tempered glass (CTG)
- NEMA socket
- Miniature photocell control
- Various column adaptors and brackets
- Wall bracket
- Metal halide lamp packages
- Electronic control gear
- High pressure die cast aluminium body polyester powder coated in any British Standard or RAL colour
- Injection moulded acrylonitrile polystyrene protective cover available in various colours
- Canopy clips removed to provide flush finish (attachment by thumbs screws only)



Horizontal mounting.



Wakefield PFI.

Photograph courtesy of Wakefield Metropolitan Borough Council