



EVOL02 | 3

THE GREEN LIGHT



Design: Hyphen Design



CHARACTERISTICS – LUMINAIRE

Optical compartment tightness level:	IP 66 Sealsafe® (*)
Control gear tightness level:	IP 66 (*)
Impact resistance: - glass	IK 08 (**)
- polycarbonate	IK 10 (**)
Aerodynamic resistance (CxS):	
- Evolo 2:	0,055 m ²
- Evolo 3:	0,077 m ²
Nominal voltage:	230V
Electrical class:	I (*)
Weight (empty):	
- Evolo 2:	6,6 kg
- Evolo 3:	10,6 kg

(*) according to IEC - EN 60598

(**) according to IEC - EN 62262

OPTIONS

- Wide choice of reflectors
- Internal or external 'anti-glare' louvres
- 0° inclination system when post-top mounted (standard 5°)
- Evolo 2: low profile polycarbonate and flat glass
Evolo 3: flat glass
- Mounting insert to suit Ø 32x80mm 'hockey stick' type column (Evolo 2)
- Anti-tamper screw
- Photocell
- 35-150W ceramic metal halide lamps (G12)
- 42-57W compact fluorescent lamps
- All RAL or AKZO colours



DESCRIPTION

Designed with sustainable development in mind, the Sealsafe® IP 66 Evolo public lighting luminaire is available in two sizes and can be fitted with an extensive range of lamps, from 35W through to 400W: high pressure sodium, ceramic metal halide (E27/E40), Cosmopolis.

The body and cover are made of high-quality painted die-cast aluminium alloy. The optical compartment consists of a deep drawn, polished and anodised aluminium reflector (multiple solutions) and a low profile curved glass protector.

The control gear, either magnetic or electronic, is attached to a quick release gear tray, equipped with a plug and socket connector. An optional thermal shield between the optic and gear area reinforces the effect of the body's external cooling fins and so extends the component lifespan.

The IP 66 tightness level for both the control gear and the optical compartment ensures optimum optical performance throughout its lifetime.

The Evolo range features a simple and effective mounting system, allowing side-entry or post-top mounting.


Through its highly developed and contemporary design, the Evolo provides a sustainable solution, able to accommodate optics, control gear and monitoring systems of the future.

Coating: polyester powder

Standard colour: RAL 7030

ADVANTAGES

- Sealsafe® IP 66 tightness level for the entire luminaire
- Low temperature in control gear compartment ensures long life of electronic components
- Multiple photometrical solutions
- Environmentally friendly:
 - Easily-recyclable materials (glass and aluminium)
 - Minimised energy consumption thanks to high efficiency
 - Controlled light distribution to eliminate light pollution
- Simple and flexible mounting system
- Wide choice of electronic components (ballasts, photocells,...)
- Quick and easy maintenance

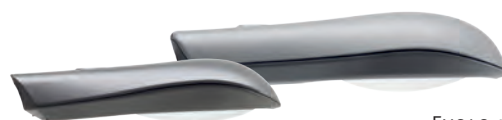

EVOLo 2

EVOLo 3

SUSTAINABLE SOLUTION WITH CONTEMPORARY DESIGN

Environmentally friendly, through the use of easily-recyclable materials and minimised energy consumption, the modern shape of the Evolo blends into a rural or city environment, whether post-top or side-entry mounted. A flat or low profile range of protectors gives the luminaire a contemporary design that will grace any street.

CONSISTENCY OF PERFORMANCE OVER TIME

The IP 66 body and IP 66 Sealsafe® optical compartment tightness levels ensure consistency of optimal photometric performance throughout the luminaire's lifetime. The body is made of painted die-cast aluminium alloy, with external cooling fins.


These fins act as a heat sink for the electronic ballast, enabling it to run even cooler.

UNBEATABLE PHOTOMETRY

The Evolo range offers a comprehensive choice of high performance reflectors. This ensures optimised photometric distributions and minimises energy consumption. Multiple lamp positions allow precise photometric adjustment and a controlled light distribution adapted to each specific environment.

DIMENSIONS – MOUNTINGS

A universal mounting piece allows side entry or vertical installation of the luminaire with two M8 locking screws.

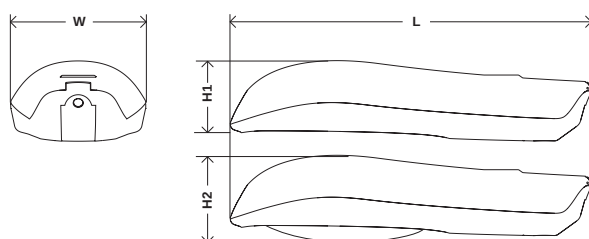

	Evolo 2	Evolo 3
L	755 mm	893 mm
H1	156 mm	199 mm
H2	192 mm	225 mm
W	302 mm	334 mm

Evolo 2 Side entry: Ø32mm, Ø42mm, Ø48mm, Ø60mm – with 120mm penetration

Post-top: Ø60mm, Ø76mm – with 76mm penetration

Evolo 3 Side entry: Ø42mm, Ø48mm, Ø60mm – with 120mm penetration

Post-top: Ø60mm, Ø76mm – with 76mm penetration

EVOLo THE GREEN LIGHT



For some configurations only: please, consult us



EVOLLO

Canopy in high-quality painted die-cast aluminium alloy.
Self-engaging canopy stay.

Single stainless steel canopy catch for quick access to lamp and control gear.
Anti-tamper screw optional.

Factory fitted inclination system.
It eliminates accidental variation on site.

Gasket providing an IP 66 tightness level to the entire luminaire.

Metallic hinge. The large opening facilitates maintenance, as it can be carried out from either side of the fitting.

Quarter turn lampholder plug and socket with bending gasket.

The Sealsafe® optical compartment provides an IP 66 tightness level, maintained over time.
Sealsafe® optic comprises a deep drawn, polished and anodised aluminium reflector sealed to the protector.

Flexibility of installation: a universal mounting piece allows post-top or side-entry installation.
M8 stainless steel locking screw.

Optional thermal shield.

Body made of painted die-cast aluminium alloy, with external cooling fins.
The aluminium body acts as a heat sink for the electronic ballast, enabling it to run even cooler.

Protector in tempered glass.
Transparency maintained over time.
Evollo 2: low profile polycarbonate and flat glass as an option.
Evollo 3: flat glass as an option.

Quick release control gear tray, equipped with plug and socket connector (option: direct fix electronic ballast for fast and reliable connection).



PHOTOMETRY

The Evolo range is the ideal solution for a wide range of lighting applications. High performance reflectors allow the Evolo to deliver the photometry required for the

area to be lit. The use of electronic ballasts and remote management facilities ensure that energy consumption is minimised.





EVOL 2 LAMPS – REFLECTORS*

Reflector	Protector		High-pressure sodium				Metal halide with ceramic arc tube				Cosmopolis			
							  							
	glass	PC	50 W	70 W	100 W	150 W					45 W	60 W	90 W	140 W
2018 			V	V	V	V	V	V	V	V	V	V	V	V
2020 			V	V	V	V	V	V	V	V	V	V	V	V

* Autres photométries (réflecteurs) disponibles. Veuillez nous consulter SVP.

E27/E40 | G12 | PGZ12

LIGHT DISTRIBUTIONS

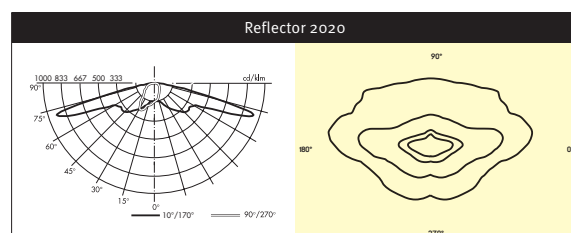
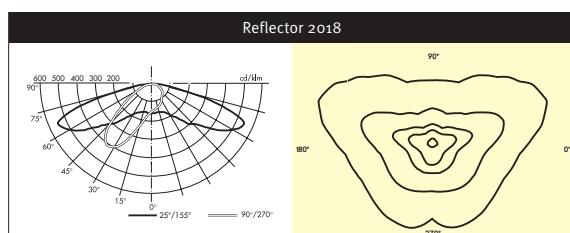


EVOL 3 LAMPS – REFLECTORS

Reflector	Protector	High-pressure sodium			Metal halide with ceramic arc tube		Cosmopolis	
	glass	150 W	250 W	400 W	150 W	250 W	90 W	140 W
1289		V	V	V	V	V	V	V
1963		V	V		V	V	V	V

E27/E40 | G12 | PGZ12

LIGHT DISTRIBUTIONS

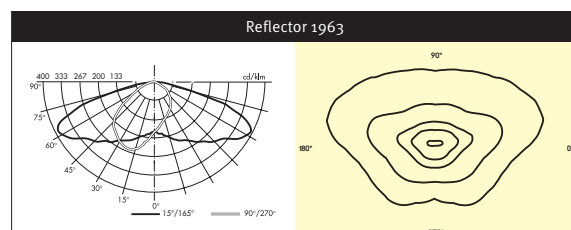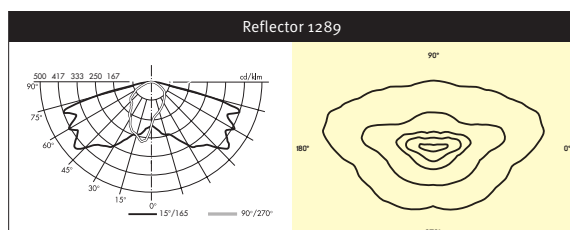







THE RIGHT LIGHTING