THORN

Omega

With improved performance
and fast installation,
Omega's better than ever!

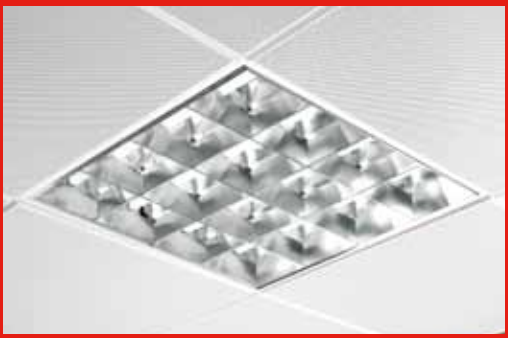

Applications overview

Fulfilling the needs of most classrooms, office spaces and general retail environments, Omega is an affordable solution you can rely on

Education

Office

Large retail store

Suitable for lay-in installation into traditional T-grid ceiling systems or mounting from below into solid or plasterboard ceilings, the Omega Range of recessed products is now compatible with the majority of ceiling types found in the general education or office environment.

General Education areas:

- Classroom
- Lecture theatre/ assembly hall
- Staffroom
- Teacher's office
- Common rooms
- Libraries

General Office areas:

- Corridors
- Canteen/cafeteria
- Breakout areas
- Open plan offices
- Individual offices
- Meeting rooms

General Retail areas:

- Super/hypermarket
- Department stores
- Public assembly area
- Restaurants/cafeterias

Omega T8

Fast and easy to fit for
a cost effective solution



Simple louvre retention



Good light output and improved uniformity to allow greater flexibility within the work place

Louvre retention

Louvre retention close up

The Omega T8 range comes complete with a fast fit louvre retention method, allowing the lamps to be accessed easily at the time of installation or during maintenance. Simply squeeze the central reflectors together to release the louvre from the metal retention clip.

Plug & Play

1.

2.



3.

FAST versions allow quick and simple installation. Just follow these simple instructions:

- Remove ceiling tile
- Tilt and lift luminaire (1)
- Lay into ceiling
- Wire terminal block through external connection hatch on side of body (2)
- Attach gripple wire from back of body to soffit ceiling (3)
- Remove louvre film

Increased ceiling compatibility

The Omega T8 range is now compatible with the following ceiling types:

- 15mm T grid (laid in only)
- 24mm T grid (laid in only)
- Concealed grid with grid height between 12mm and 65mm (with wedge brackets)
- Plasterboard (with wedge brackets)

(Wedge brackets available as an accessory)

Omega T5

Compact and efficient with excellent photometric performance



Improved photometric performance



New and improved louvre material provides approx 20% higher light output than its predecessor, providing a more efficient lighting solution for education, office and retail environments.

Plug & Play

The Omega T5 range now comprises easy to fit versions, with the following additional features:

- Lamps included
- External connection hatch for quick access to terminal block
- Protective louvre film attached
- Gripple wire for securing to soffit ceiling

Shallow body design

Based on an attractive, shallow body platform, the Omega T5 is the perfect solution where the available space within the ceiling void is limited

Increased ceiling compatibility

The Omega T5 range can now be installed into concealed grid systems or plasterboard ceiling, using the mini wedge brackets (available as an accessory). To fit, simply:

- Push luminaire body up into the grid, level with the ceiling tile (1)
- Secure 4 x wedge brackets at each corner, from inside the body (2)
- Slot lamps into lamp holders
- Slide 2 x blanking strips into place (3)
- Clip in louvre (4)

Omega D/I

A balance of upward and downward light to enhance the ambience within the room





The batwing shape of the Omega D/I light distribution provides a broad and uniform lit environment. This allows greater flexibility in terms of how the space will be used and improves communication by ensuring the occupants are well lit throughout the space, particularly vital for teachers and pupils within a classroom setting.

Mirrorbrite louvre

A choice of 2 optics available, Mirrorbrite louvre version or opal diffuser, depending on the lit appearance required

Creating a pleasant working environment

The Omega D/I provides a mix of direct task light and soft, indirect ambient light. This balance provides enough light onto the work surface to allow efficient completion of tasks whilst creating a more visually stimulating environment for the user.



Simple to attach optics, quickly assembled by clipping onto fixings mounted in the body

Omega Range

Lamps

Omega T8:
18W, 36W T26 (T8) (FD) linear fluorescent. Cap: G13

Omega T5:
14W, T16 (T5) (FDH) linear fluorescent. Cap: G5

Omega D/I:
40W, 55W TC-L (FSD) compact fluorescent. Cap: 2G11
24W, T16 (T8) (FDH) linear fluorescent. Cap: G5

Materials/Finish

Body: white painted steel with highly reflective finish.
T8 optics: Mirrorbite or Satinbrite aluminium, or plain profile cross vanes.
T5 optics: Mirrorbrite or Satinbrite aluminium
D/I optics: Mirrorbrite aluminium or opal diffuser

Installation/Mounting

Designed to be quick and easy to install, either parallel or at right angles to the ceiling grid. Can be mounted from below or laid in, dependent on the ceiling type. Mini wedge brackets required when mounting from below (sold as accessory). Suitable for plasterboard and T-grid ceiling systems. Diffuser versions suitable for lay-in into 15mm or 24mm exposed T grid only. Louvre retention for ease of lamp replacement.

Standards

Designed and manufactured to comply with EN60598
EN 605982.22 (emergency versions)
Class I electrical
Ta 25°C
IP20

Description		Standard versions		Emergency versions		
	Wt (Kg)	Cat No.	SAP Code	Wt (Kg)	Cat No.	SAP Code
Omega T8						
High Frequency Standard Versions						
OMEGA2 4X18W T26 HF PSB L000	4.0	OMZ418HO	96504514	5.0	OMZ418HOE3	96504557
OMEGA2 4X18W T26 HF DMB L000	4.0	OMZ418M	96504483	5.0	OMZ418ME3	96504534
OMEGA2 4X18W T26 HF DSB L000	4.0	OMZ418S	96504495	5.0	OMZ418SE3	96504543
OMEGA2 4X36W T26 HF PSB L000	8.0	OMZ436HO	96504518	9.0	OMZ436HOE3	96504559
OMEGA2 4X36W T26 HF DMB L000	8.0	OMZ436M	96504487	9.0	OMZ436ME3	96504536
OMEGA2 4X36W T26 HF DSB L000	8.0	OMZ436S	96504501	9.0	OMZ436SE3	96504547
High Frequency Standard Dimmable Versions						
OMEGA2 4X18W T26 HFD PSB L000	4.0	OMZ418HOD	96504515	5.0	OMZ418HOE3D	96504558
OMEGA2 4X18W T26 HFD DMB L000	4.0	OMZ418MD	96504484	5.0	OMZ418ME3D	96504535
OMEGA2 4X18W T26 HFD DSB L000	4.0	OMZ418SD	96504496	5.0	OMZ418SE3D	96504544
OMEGA2 4X36W T26 HFD PSB L000	8.0	OMZ436HOD	96504519	9.0	OMZ436HOE3D	96504560
OMEGA2 4X36W T26 HFD DMB L000	8.0	OMZ436MD	96504488	9.0	OMZ436ME3D	96504537
OMEGA2 4X36W T26 HFD DSB L000	8.0	OMZ436SD	96504502	9.0	OMZ436SE3D	96504548
High Frequency FAST Versions (Plug & Play)						
OMEGA2 F 4X18W T26 HF IS PSB L840	4.5	OMZ418HOF	96504603	5.5	OMZ418HOE3F	96504627
OMEGA2 F 4X18W T26 HF IS DMB L840	4.5	OMZ418MF	96504575	5.5	OMZ418ME3F	96504617
OMEGA2 F 4X18W T26 HF IS DSB L840	4.5	OMZ418SF	96504589	5.5	OMZ418SE3F	96504623
OMEGA2 F 4X36W T26 HF IS PSB L840	8.5	OMZ436HOF	96504607	9.5	OMZ436HOE3F	96504629
OMEGA2 F 4X36W T26 HF IS DSB L840	8.5	OMZ436SF	96504593	9.5	OMZ436SE3F	96504625
OMEGA2 F 4X36W T26 HF IS DMB L840	8.5	OMZ436MF	96238865	9.5	OMZ436ME3F	96238869
High Frequency FAST Dimmable Versions (Plug & Play)						
OMEGA2 F 4X18W T26 HFD IS PSB L840	4.5	OMZ418HODF	96504604	5.5	OMZ418HOE3DF	96504628
OMEGA2 F 4X18W T26 HFD IS DMB L840	4.5	OMZ418MDF	96504576	5.5	OMZ418ME3DF	96504618
OMEGA2 F 4X18W T26 HFD IS DSB L840	4.5	OMZ418SDF	96504590	5.5	OMZ418SE3DF	96504624
OMEGA2 F 4X36W T26 HFD IS PSB L840	8.5	OMZ436HODF	96504608	9.5	OMZ436HOE3DF	96504630
OMEGA2 F 4X36W T26 HFD IS DSB L840	8.5	OMZ436SDF	96504594	9.5	OMZ436SE3DF	96504626
OMEGA2 F 4X36W T26 HFD IS DMB L840	8.5	OMZ436MDF	96238866	9.5	OMZ436ME3DF	96238870
Omega T5						
High Frequency Standard Versions						
OMEGA2 4X14 T16 HF DSB L000	4.0	OMZ414S	96504787	5.0	OMZ414SE3	96504806
OMEGA2 4X14 T16 HF DMB L000	4.0	OMZ414M	96504792	5.0	OMZ414ME3	96504808
OMEGA2 4X24 T16 HF DSB L000	8.0	OMZ424S	96534915	9.0	OMZ424SE3	96534931
OMEGA2 4X24 T16 HF DMB L000	8.0	OMZ424M	96534917	9.0	OMZ424ME3	96534929
High Frequency Standard Dimmable Versions						
OMEGA2 4X14 T16 HFD DSB L000	4.0	OMZ414SD	96504791	5.0	OMZ414SE3D	96504807
OMEGA2 4X14 T16 HFD DMB L000	4.0	OMZ414MD	96504793	5.0	OMZ414ME3D	96504809
OMEGA2 4X24 T16 HFD DSB L000	8.0	OMZ424SD	96534916	9.0	OMZ424SE3D	96534932
OMEGA2 4X24 T16 HFD DMB L000	8.0	OMZ424MD	96534918	9.0	OMZ424ME3D	96534930
High Frequency FAST Versions (Plug & Play)						
OMEGA2 F 4X14 T16 HF IS DSB L840	4.5	OMZ414SF	96504833	5.5	OMZ414SE3F	96504857
OMEGA2 F 4X14 T16 HF IS DMB L840	4.5	OMZ414MF	96504837	5.5	OMZ414ME3F	96504859
OMEGA2 F 4X24 T16 HF IS DSB L840	8.5	OMZ424SF	96534945	9.5	OMZ424SE3F	96534957
OMEGA2 F 4X24 T16 HF IS DMB L840	8.5	OMZ424MF	96534943	9.5	OMZ424ME3F	96534959
High Frequency FAST Dimmable Versions (Plug & Play)						
OMEGA2 F 4X14 T16 HFD IS DSB L840	4.5	OMZ414SDF	96504834	5.5	OMZ414SE3DF	96504858
OMEGA2 F 4X14 T16 HFD IS DMB L840	4.5	OMZ414MDF	96504838	5.5	OMZ414ME3DF	96504860
OMEGA2 F 4X24 T16 HFD IS DSB L840	8.5	OMZ424SDF	96534946	9.5	OMZ424SE3DF	96534958
OMEGA2 F 4X24 T16 HFD IS DMB L840	8.5	OMZ424MDF	96534944	9.5	OMZ424ME3DF	96534960
Omega D/I						
OMEGA DI 2X24W T16 HF DMB L840	4.3	OMZ224MDI	96229464	5.2	OMZ224MDIE3	96229468
OMEGA DI 2X40W TC-L HF DMB L840	4.2	OMZ240MDI	96229463	5.7	OMZ240MDIE3	96229467
OMEGA DI 2X40W TC-L HF OP L840	4.2	OMZ240OPDI	96229458	5.7	OMZ240OPDIE3	96229465
OMEGA DI 1X55W TC-L HF DMB L840	4.2	OMZ155MDI	96236571	5.7	OMZ155MDIE3	96236572

Accessories			
MINI WEDGE	Mini wedge bracket kit (x4)	OMW	96218676

PSB - Plain profile cross vanes, DMB - Mirrorbrite louvre, DSB - Satinbrite louvre, L000 - without lamp, L840 - with 840 lamps, OP - Opal diffuser, IS - External connection

This ordering guide represents the most popular products.
Please visit our online catalogue for the full range of Omega products including prismatic flat panel versions (Omega T8 and T5): www.thornlighting.co.uk

Range overview - new design

The Omega range is a selection of highly efficient recessed luminaires, which are tailored to suit the needs of the installer

Key features

- **More light/less money - 20% higher light output (Omega T5)**
- **Extremely quick to install (FAST versions)**
- **Significantly increased compatibility with ceiling types**
- **Great price and availability**
- **A perfect version for every application**



Performance: visual effectiveness

- Broad light distribution to allow good uniformity and a flexible working environment
- Good modelling of faces and vertical surfaces (i.e. book shelves) due to excellent vertical luminance, particularly from the Omega D/I

Efficiency: minimising the use of energy

- HF gear only, reducing power demand and extending lamp life, resulting in reduced maintenance costs
- Dimmable options to allow daylight linking and presence detection (Omega T8 and T5 only)
- Plug & Play variants available to reduce installation time (Omega T8 and T5 only)

Comfort: Giving people satisfaction and stimulation

- Recessed luminaires allow integration of the light source within the ceiling, producing a clean uncluttered space
- A combination of uplight and downlight provides a balanced ambience, creating a pleasant and welcoming space (Omega D/I only)
- Low glare louvre option, where glare levels of less than 200cd/m^2 are required (Omega T8 only

Head Office
Thorn Lighting Ltd
Durhamgate, Spennymoor,
County Durham, DL16 6HL
Tel: +44 (0) 1388 42 00 42
Fax: +44 (0) 1388 42 01 56
Email: brochures.uk@thornlighting.com

www.thornlighting.co.uk

Thorn Lighting is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. The right is reserved to change specifications without prior notification or public announcement. All goods supplied by the company are supplied subject to the company's General Conditions of Sale, a copy of which is available on request. All measurements are in millimetres and weights in kilograms unless otherwise stated.

Publication No: 467(GB) Publication Date: 06/10
SAP Code: 96504133