

STANDARD ARRIVAL CHART-INSTRUMENT

D-ATIS 126.85(ARR)
TWR 130.35(118.05)(E)
VAR2°W 118.45(130.35)(W)

ZGSZ SHENZHEN/Baoan
RWY15/16

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM


Zhuhai APP(R) TM01 120.35(127.95)
TM02 124.25(126.0)
TM03 123.85(126.0)
TM04 124.75(127.95)
TM05 119.025(119.55)

TL 3600(QNH<980hPa)
3300(QNH>980hPa)
TA 2700

Arrival MAX IAS 460Kmh below 3300m.
Holding MAX IAS 380Kmh.
Initial approach MAX IAS 380Kmh.
SAR-2XA need ZhuHai Approach ATC clearance.



This chart only used when 'ZUH' U/S

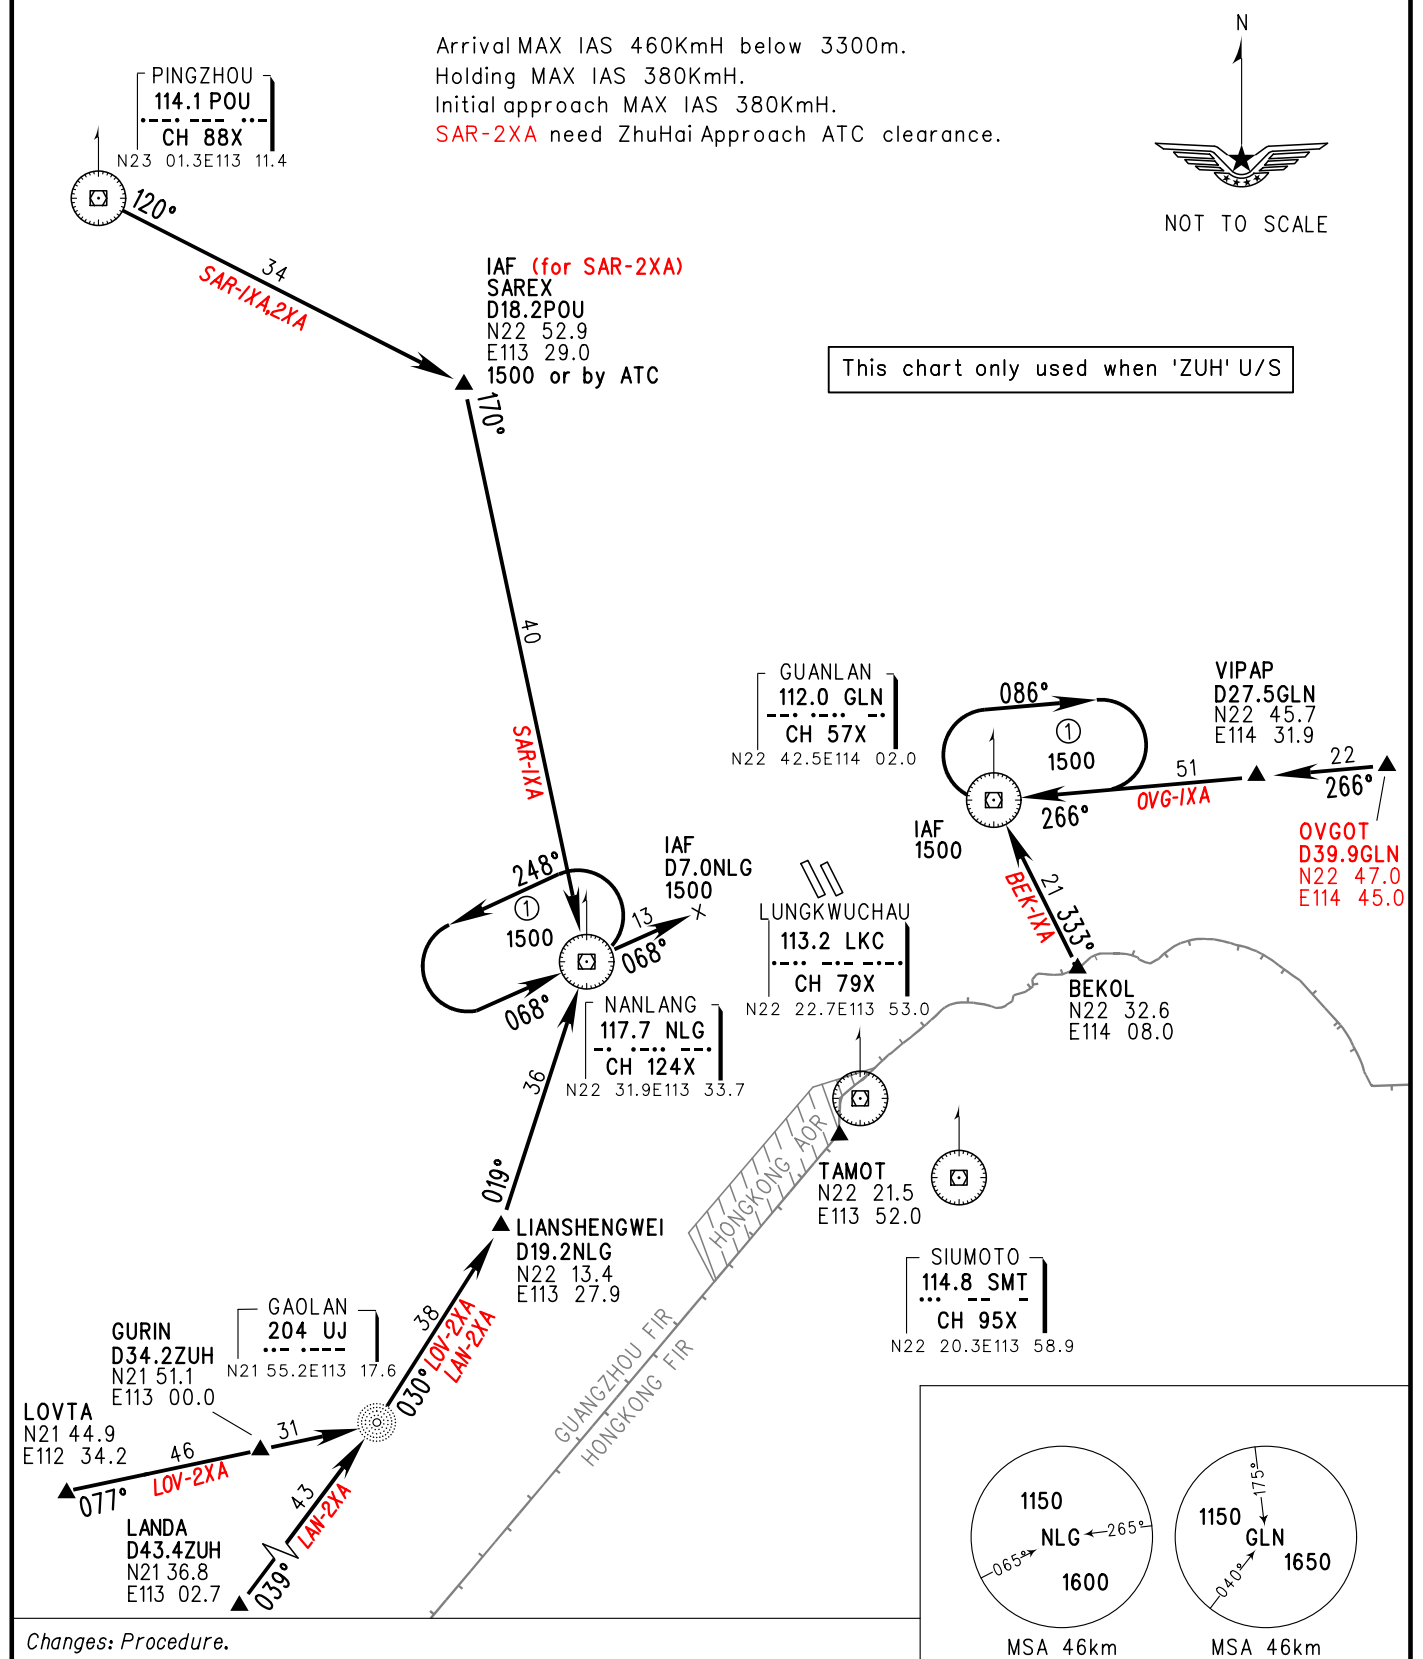

Changes: Procedure.