



AERODROME CHART

TWR 118.5(130.0)

ZWSH KASHI/Kashi
N39° 32.7'E076° 01.3' ELEV 1380m

RWY	Direction	Bearing strength (PCN)
08	083°	RWY, TWY A, B, C, F Stands Nr.7,7L,7R,8: 74/R/A/W/T
26	263°	Stands Nr.1-2: 74/R/B/W/T Main A , TWY D, E, Stands Nr.3-6: 31/R/B/W/T

BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

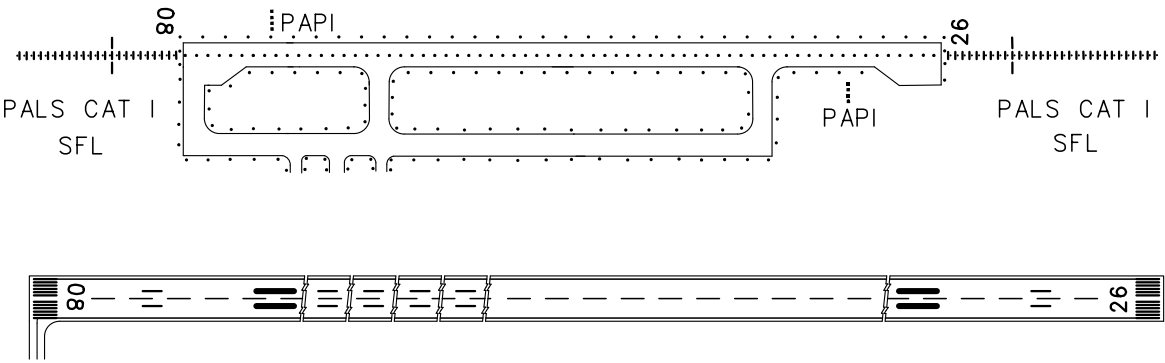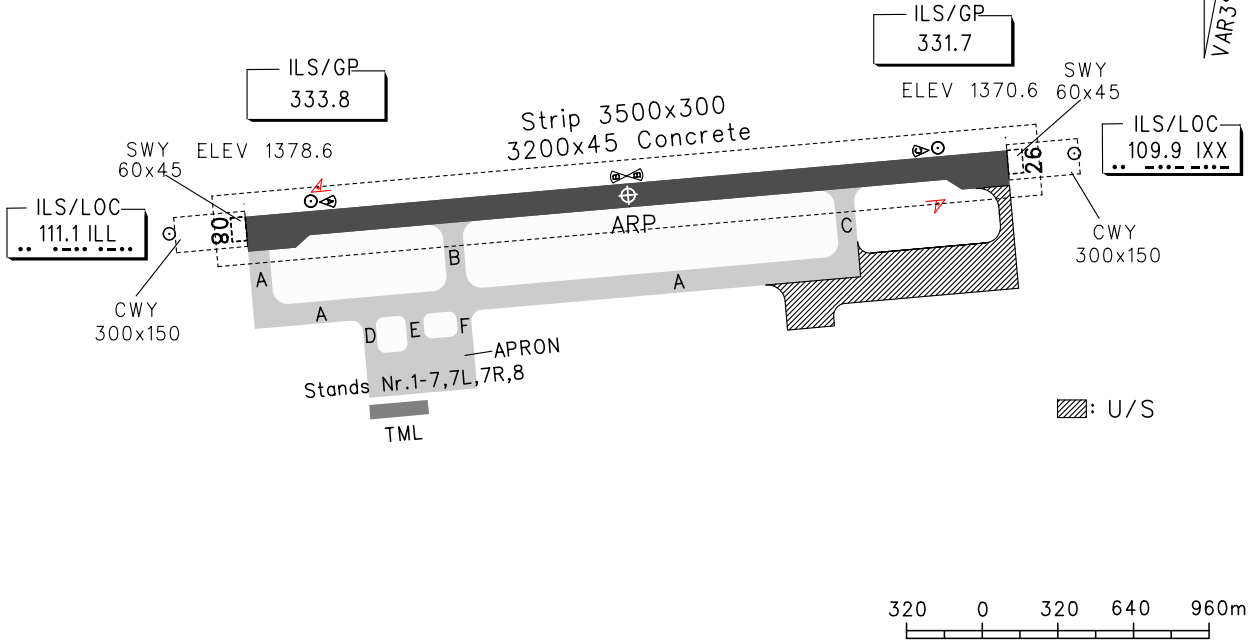

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS		
ACFT Type		RWY08		RWY26		RWY08	RWY26
		REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A	RVR400 VIS800	RVR500 VIS800	RVR400 VIS800	RVR500 VIS800	PALS CAT I SFL PAPI REDL RCLL	PALS CAT I SFL PAPI REDL RCLL
	B						
	C						
	D						
Other 1&2 ENG							
Note: RVR/VIS 1600m and ceiling≥100m for one engine aircraft.							